

PONTON X/P 4.4 user guide

Version: 10

Datum: 06-Apr-2023

Copyright Notice

This document is the confidential and proprietary information of PONTON GmbH ("Confidential Information"). You shall not disclose such Confidential Information and shall use it only in accordance with the terms of the license agreement you entered into with PONTON GmbH.

Table of Contents

1	Installation Guide	8
1.1	Installation procedure	8
1.1.1	Windows.....	8
1.1.2	Linux.....	8
1.2	Importing the X/P configuration from a previous version	10
1.2.1	Messenger Version < 3.1	10
1.2.2	Messenger Version 3.1 - 3.6	10
1.2.3	Messenger Version 3.7 - 3.11	11
1.2.4	Messenger Version 4.0 and up	11
1.3	Installing multiple Messenger instances on the same system	12
1.3.1	Installation.....	12
1.3.2	Configuration.....	12
2	Initial Setup.....	12
2.1	How to get started.....	12
2.1.1	Logging in.....	12
2.1.2	Using the Navigation Bar	14
2.1.3	Need help?.....	15
2.1.4	Activate the software (trial version).....	16
2.1.5	Basic configuration	17
2.1.6	Start communication	20
2.1.7	View Messages in the Message Monitor.....	20
2.2	Security recommendations	21
2.2.1	Updating of Java Runtime	21
2.2.2	Encrypt database communication.....	21
2.2.3	Strict SSL check when sending messages	21
2.2.4	Replace default SSL certificate in Listener.....	21
2.2.5	Disable weak TLS-ciphers in the Listener	22
2.2.6	Update CA certificate	22
3	Graphical User Interface Quick Starter.....	23
3.1	Find your way around.....	23
3.2	Select and execute actions	23
3.3	Arrange your data.....	24
3.4	Change your settings and log-out.....	24
3.5	Configure settings.....	25
4	Main Navigation	25
4.1	Log-in	25
4.2	Main Navigation (left).....	26
4.3	Main Navigation (right)	27

4.3.1	Set Messenger instance name.....	27
4.4	User Menu	28
4.4.1	Change your language settings.....	28
4.4.2	Change your password	28
4.4.3	Log-out.....	28
5	Monitor.....	28
5.1	Dashboard	28
5.1.1	Restart Messenger.....	29
5.1.2	Download config files	29
5.1.3	Download log files	29
5.2	Adapter Status.....	29
5.2.1	Delete Adapter reference(s).....	30
6	Message Monitor.....	30
6.1	Filter Messages	31
6.1.1	Select filter criteria	31
6.1.2	Set further message filter attributes	31
6.2	View Messages and trigger message Actions.....	32
6.2.1	Table headings.....	32
6.2.2	Resend messages.....	33
6.2.3	Delete messages.....	33
6.2.4	Delete messages from queue	33
6.2.5	Send messages to new adapter.....	33
6.2.6	Resend all messages with bulk resend	34
6.2.7	Toggle between failed and resolved status of messages	34
6.2.8	View details of a message	34
6.2.9	Add or change the log info of a message	35
7	Messenger >Partner	35
7.1	My Partners	35
7.1.1	Create a local partner	36
7.1.2	Create a remote partner.....	38
7.1.3	Delete partner(s)	41
7.1.4	Synchronize partner profile with the registry	41
7.2	Partner Registry	41
7.2.1	Import partner profiles.....	42
7.3	Individual Partner configuration.....	42
7.3.1	Edit a Partner	42
7.4	Certificates.....	43
7.4.1	Partner Certificates.....	43
7.4.2	CA Certificates	45

8	Messenger >Agreements.....	46
8.1	View Agreements list.....	46
8.2	Create a new Agreement.....	46
8.2.1	Enter Processing settings.....	47
8.2.2	Enter Packager settings	48
8.2.3	Configure Schema Set.....	52
8.2.4	Enter Integration details.....	52
8.2.5	Enter Communication details	53
8.3	Edit an agreement	53
8.4	Delete agreements	54
8.5	Agreement template customization.....	54
9	Messenger >Settings	54
9.1	Test the connection to database	55
9.2	Reconnect to database	55
9.3	Test sending e-mail.....	55
9.4	General Settings	55
9.4.1	Enter database settings	55
9.4.2	Define logging level	56
9.4.3	Enter message queue settings.....	57
9.4.4	Enter Partner Registry Settings	57
9.4.5	Enable E-mail	58
9.4.6	Enter E-mail Notification settings.....	58
9.4.7	Enter Communication settings	60
9.4.8	Enable Time Server	61
9.4.9	Enter Server settings	62
9.4.10	Enter Archive settings.....	62
9.4.11	Set-up Maintenance periods	63
9.4.12	Enter Listener Connection settings.....	63
9.4.13	Authentication Token	64
9.4.14	Display	64
9.5	Server certificate	64
9.5.1	Request Server certificate	65
9.5.2	Request Server Certificate (pre-existing)	65
9.5.3	Export Server Certificate	66
9.5.4	CA Certificates	66
10	Messenger >Activation.....	66
10.1	Get license info.....	67
10.2	Send Activation Request.....	67
10.3	Mail the Activation Request	68

10.4	Install activation/license.....	68
10.4.1	Installing a license activation.....	68
10.4.2	Installing a license.....	68
11	Messenger >Schema.....	68
11.1	View available Schema Sets.....	68
11.2	Import a new Schema Set.....	69
12	Messenger >Multicast Rules.....	69
13	Listener Configuration and Certificates.....	70
13.1	Listener Configuration	70
13.1.1	Proxy Settings	71
13.1.2	HTTP Settings.....	71
13.1.3	FTP Settings	71
13.2	Listener certificate	72
13.2.1	Install Listener Certificate	72
13.2.2	Request Listener Certificate	72
13.2.3	Export Listener Certificate	72
13.2.4	Install Listener CA Certificate.....	72
13.2.5	Export Listener CA Certificate.....	73
13.2.6	Delete Listener CA Certificate.....	73
13.3	Client Certificates	73
13.3.1	Install Client Certificate	73
13.3.2	Export Client Certificate.....	73
13.3.3	Delete Client Certificate	73
13.3.4	Install Client CA Certificate	74
13.3.5	Export Client CA Certificate	74
13.3.6	Delete Client CA Certificate	74
14	Hotfolder	74
14.1	View available Hotfolder	74
14.2	Create a new Hotfolder	75
14.2.1	Enter General Settings.....	75
14.2.2	Enter Inbox Settings.....	75
14.2.3	Enter Outbox Settings.....	77
14.3	Delete a Hotfolder	79
14.4	Edit a Hotfolder	79
15	Test Adapter	79
15.1	Send a Ping message	79
15.2	Send a Test Message	79
16	Http Adapter.....	80
16.1	Configuration.....	80

16.1.1	using multiple Http Adapters	80
16.2	Outbound Direction	80
16.2.1	Request	80
16.2.2	Response	81
16.3	Inbound Direction	81
16.3.1	Request	81
16.3.2	Response	82
17	User Admin	82
17.1	Enter and change security settings	83
17.1.1	Change user password validity	83
17.1.2	Change number of failed login attempts	83
17.1.3	Change account lock duration	83
17.2	User settings	83
17.2.1	Create a new user	83
17.2.2	Detailed overview of use role rights	84
17.2.3	Delete a user	85
17.2.4	Change user role	85
17.2.5	Edit user password	85
17.2.6	Authentication certificate	85
18	Two-Factor Authentication	85
18.1	Prerequisites	85
18.2	Setup	86
18.3	Disable	87
18.4	Change Secret / Reconfigure	87
18.5	Enforce Two-Factor Authentication	88
19	REST API	88
19.1	Authentication	88
19.1.1	Json-Web-Token (JWT)	89
19.1.2	TLS Client Authentication	89
19.2	Using Swagger UI	89
19.3	Statistics	91
20	Cluster Mode	92
20.1	System overview	93
20.2	Configuration	94
21	Appendix	96
21.1	AS4-BDEW at a glance	96
21.1.1	Partner Setup	96
21.1.2	Partner Certificates	96

21.1.3	Schema Set for Path Switch	96
21.1.4	Agreements	97
21.1.5	Settings	97
21.2	Database structure	97
21.2.1	CONVERSATION table	97
21.2.2	MESSAGE table	98
21.2.3	MESSAGE_LOG table	99
21.3	Troubleshooting	99
21.3.1	Outbound queue fills up	99
21.3.2	Inbound queue fills up	100

1 Installation Guide

1.1 Installation procedure

1.1.1 Windows

The PONTON XP Messenger is delivered as a zip file which needs to be unpacked to a directory of your choice, the configuration files have to be edited manually.

Prerequisites

Please define and verify certain parameters such as the following before proceeding:

- You need a database installed (either locally or remote)

Step 1: Copy and unpack the .zip messenger installation file in your chosen directory.

To avoid errors during the installation procedure please define and verify certain parameters such as the following before executing the installer as a windows service:

Service installer configuration in launcher\conf\wrapper.conf

```
set.NTSERVICE_NAME=pontonxpmessenger
# This value has to be a unique service identifier on the Windows system. So if
there are multiple Messenger instances on this system, you need to modify this.
```

Step 2: The Messenger can then also be installed as a windows service. To do so please execute installService.bat in the freshly unpacked PONTON X/P Messenger installation.

A command line window will show up on the screen, stating that the PONTON X/P Messenger has been installed successfully.

wrapper | PONTON X/P Messenger installed.

Step 3: Before starting the PONTON X/P Messenger as an installed service:

Messenger database preparations

It is highly recommended to make the following preparations in the the database before running the service:

- 1) The required database tables have been defined in the database schema. Suitable SQL scripts are provided in the folder 'sql' within the messenger installation.
- 2) Furthermore a compatible database driver will be required by the PONTON X/P Messenger. Please save a copy of the required driver in the folder lib_ext of the messenger installation.

Step 4: Start PONTON X/P Messenger as an installed service. If any errors occur during startup, this will be logged in the data\log\wrapper.log

1.1.2 Linux

The PONTON X/P Messenger is delivered as a zip file which needs to be unpacked to a directory of your choice, the configuration files have to be edited manually.

Prerequisites

Please define and verify certain parameters such as the following before proceeding:

- You need a database installed (either locally or remote)

Log in to the Linux machine with the user intended to run the messenger. Ensure that this user has the right to read, write und execute!

Step 1 : Copy and unpack the .zip messenger installation file in your chosen directory.

Step 2 : Before proceeding with the installation process please ensure that the **PONTON XP 4.x/pontonxp** as well as the **PONTON XP 4.x/launcher/linux-.../wrapper** files are executable.

Step 3 : Configure the necessary parameters in pontonxp :

Installation configuration in pontonxp

```
...
APP_HOME="."          # Ensure that this location refers to your PONTON XP 4.x
messenger installation.
...
```

Step 4 : Before starting the PONTON X/P Messenger please set up your database

Messenger database preparations

It is highly recommended to make the following preparations in the the database before running the service:

- 1) The required database tables have to defined in the database schema. Suitable SQL scripts have been provided in the folder 'sql' within the messenger installation.
- 2) Furthermore a compatible database driver will be required by the PONTON X/P Messenger. Please save a copy of the required driver in the folder lib_ext of the messenger installation.

Step 5 : Start the messenger service

- Manual start

`./pontonxp start`

Alternatively:

- Control start/stop using systemd

Many current Linux distributions come with systemd replacing the old SysVinit script based service launcher.

This textfile in the right place plus the command `# systemd daemon-reload` registers the PONTON X/P Messenger as a systemd service :

/etc/systemd/system/pontonxp.service

```
[Unit]
Description=PONTON XP
After=network-online.target

[Service]
Type=forking
# Put user with write permissions below
User=username
# Put absolute path to pontonxp base-directory in all of the following
PIDfile=[path_to_pontonxpdir]/launcher/conf
ExecStart=[path_to_pontonxpdir]/pontonxp start
ExecStop=[path_to_pontonxpdir]/pontonxp stop
```

```
[Install]
WantedBy=multi-user.target
```

- Consider moving the pontonxp folder to a non-user and non-system directory like /usr/share/
- To run PONTON X/P Messenger as a service, we recommend to create a dedicated user without login shell for this use.
- Make this user owner of the pontonxp directory including all subdirectories

```
# systemctl enable pontonxp
```

The command above enables the pontonxp service over reboots.

Use *systemctl status pontonxp* to obtain runtime informations and log. *systemctl stop pontonxp* shuts down the messenger.

Both methods: If any errors occur during startup, this will be logged in the data/log/wrapper.log

1.2 Importing the X/P configuration from a previous version

1.2.1 Messenger Version < 3.1

Configurations from Messenger Versions older than 3.1 are not compatible with the current version. Please contact our helpdesk to discuss your upgrade path.

1.2.2 Messenger Version 3.1 - 3.6

The configuration files and database content are compatible with the current Messenger version. However there was a change in the directory structure, therefore it is required to copy the old files to the correct folder as listed below:

- Copy and replace the following folders or files from the Installation Path of the old messenger (XP_OLD) into the Installation folder of new Messenger (XP_NEW)
- **Copy the Database Driver** file from the Installation path <XP_OLD>\xmlpipe\lib_ext into Installation path <XP_NEW>\lib_ext
- **Rename** the existing Config folder under Installation path <XP_NEW>\config into **config_NotInUse**
- **Copy the Config folder** from the <Installation path <XP_OLD>\xmlpipe\config into Installation path <XP_NEW>\config
- **Copy the Archive folder** from the <Installation path <XP_OLD>\xmlpipe\archive into Installation path <XP_NEW>\data\archive
- **Copy the Archive_failed** folder from the <Installation path <XP_OLD>\xmlpipe\archive_failed into Installation path <XP_NEW>\data\archive_failed
- **Copy the Hotfolder** folder from the <Installation path <XP_OLD>\xmlpipe\<hotfolder name> into Installation path <XP_NEW>\data\<hotfolder name>
- **edit the server.xml** file in the <XP_NEW>\config folder
 - search for

```
<Service>GUI</Service>
```

replace it with

```
<Service>REST</Service>
```

- Stop the old Messenger (XP_OLD)
- Start the new Messenger (XP_NEW)

1.2.3 Messenger Version 3.7 - 3.11

The configuration files and database content are compatible with the current Messenger version. The following folders can be copied as needed :

- Copy and replace the following folders or files from the Installation Path of the old messenger (XP_OLD) into the Installation folder of new Messenger (XP_NEW)
- **Copy the Database Driver** file from the Installation path <XP_OLD>\lib_ext into Installation path <XP_NEW>\lib_ext
- **Rename** the existing Config folder under Installation path <XP_NEW>\config into **config_NotInUse**
- **Copy the Config folder** from the <Installation path <XP_OLD>\config into Installation path <XP_NEW>\config
- **Copy the Archive folder** from the <Installation path <XP_OLD>\data\archive into Installation path <XP_NEW>\data\archive
- **Copy the Archive_failed** folder from the <Installation path <XP_OLD>\data\archive_failed into Installation path <XP_NEW>\data\archive_failed
- **Copy the Hotfolder** folder from the <Installation path <XP_OLD>\data\<hotfolder name> into Installation path <XP_NEW>\data\<hotfolder name>
- **edit the server.xml** file in the <XP_NEW>\config folder
 - search for

```
<Service>GUI</Service>
```

replace it with

```
<Service>REST</Service>
```

- Stop the old Messenger (XP_OLD)
- Start the new Messenger (XP_NEW)

1.2.4 Messenger Version 4.0 and up

The configuration files and database content are compatible with the current Messenger version. The following folders can be copied as needed :

- Copy and replace the following folders or files from the Installation Path of the old messenger (XP_OLD) into the Installation folder of new Messenger (XP_NEW)
- **Copy the Database Driver** file from the Installation path <XP_OLD>\lib_ext into Installation path <XP_NEW>\lib_ext
- **Rename** the existing Config folder under Installation path <XP_NEW>\config into **config_NotInUse**
- **Copy the Config folder** from the <Installation path <XP_OLD>\config into Installation path <XP_NEW>\config
- **Copy the Archive folder** from the <Installation path <XP_OLD>\data\archive into Installation path <XP_NEW>\data\archive
- **Copy the Archive failed** folder from the <Installation path <XP_OLD>\data\archive_failed into Installation path <XP_NEW>\data\archive_failed

- **Copy the Hotfolder** folder from the <Installation path <XP_OLD>\data\<hotfolder name> into Installation path <XP_NEW>\data\<hotfolder name>
- Stop the old Messenger (XP_OLD)
- Start the new Messenger (XP_NEW)

1.3 Installing multiple Messenger instances on the same system

1.3.1 Installation

Each Messenger instance has to be installed in a dedicated folder.

1.3.2 Configuration

There are several default ports defined in the Messenger configuration. These default values need to be adjusted to avoid port conflicts that would prevent the successful start of the Messenger instances.

The following port values need to be changed:

Port Name	default value	config file	parameter
Web GUI + REST API	8443	/config/server.xml	/Server/Connector/Port
Adapter-API v1	8080	/config/server.xml	/Server/Connector/Port
Adapter-API v2	2600	/config/server.xml	/Server/AdapterInterface/Port
Shutdown-control	7626	/config/server.xml	/Server/@Port

It is required to have the Messenger instances connected to an external database.

2 Initial Setup

2.1 How to get started

2.1.1 Logging in


Open your web browser and enter the following URL:

`https://<hostname>:8443/`

or

`https://localhost:8443/` if the Messenger is running on the local machine!

This will bring up the login screen, allowing you to log in to the Ponton X/P Administration Tool:

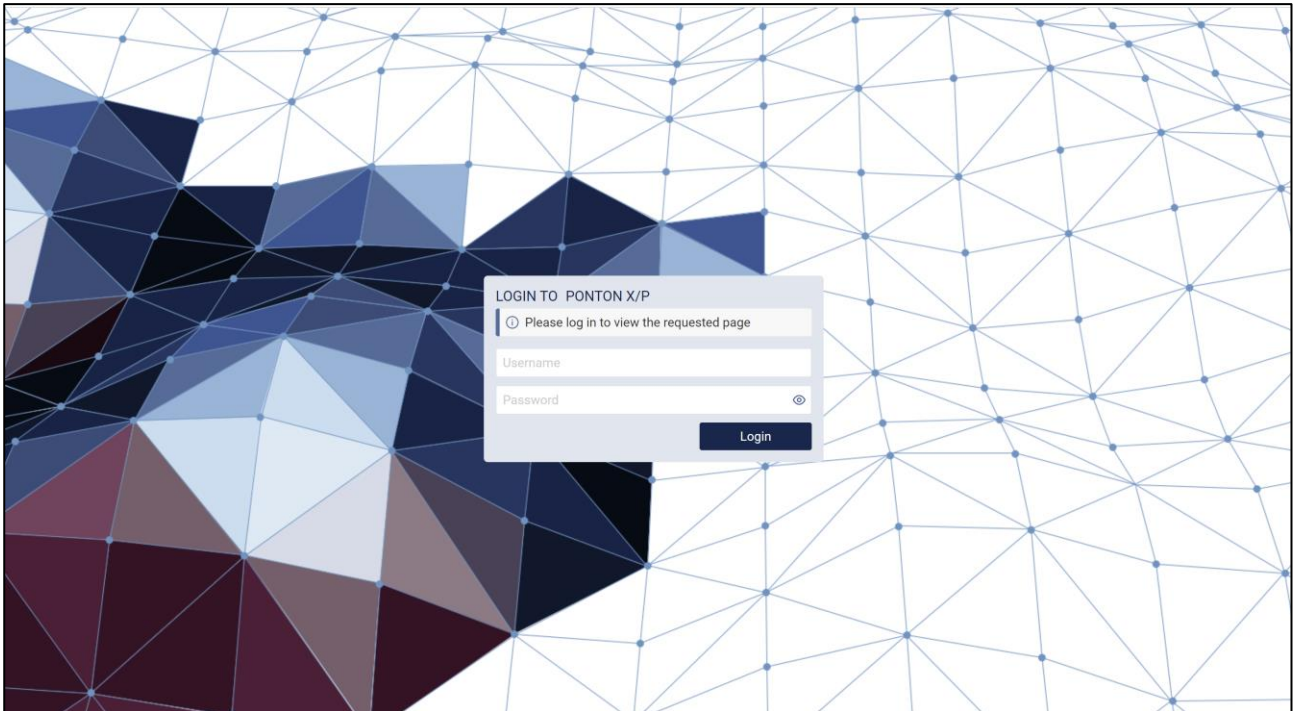

The initial user name and password depends on the type of installation.

For an on premise installation the default values are:

User: xadmin


Password: xppass

For an AWS installation the default values are:

User: xadmin

Password: (EC2 instance_id)



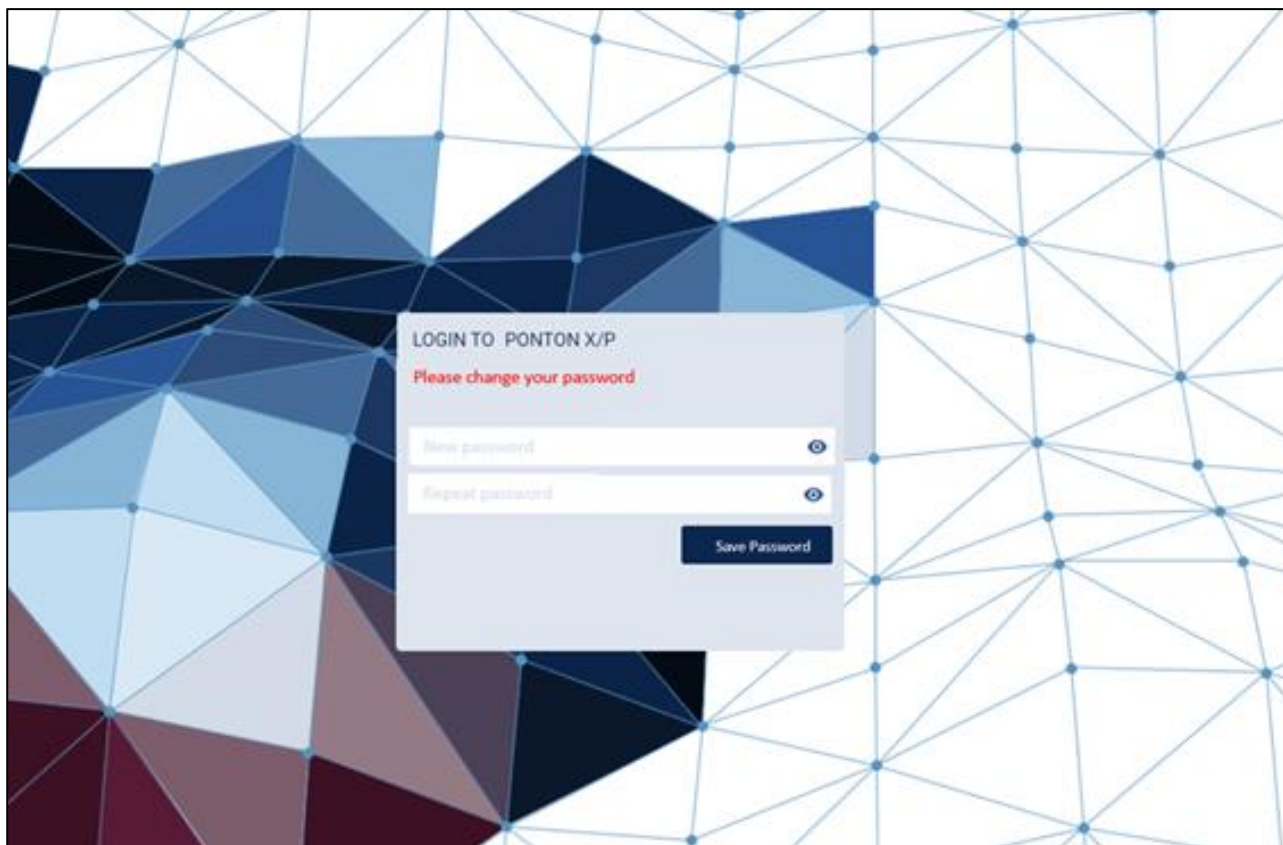

The initial user login values must be changed on first login to prevent unauthorized access to the Administration Tool. After entering the username and password and clicking on the "Login" button you will be asked to enter a new password and repeat it. Once you entered valid and matching passwords click on the "Save Password" button.







2.1.2 Using the Navigation Bar


Click on the icons on the navigation bar to navigate the main pages.

2.1.2.1 Main Navigation (left)

				
Area	Symbol	Description	Subnavigation	Description
Monitor			• Dashboard	
			• Adapter Status	
Messages		View message details and delete Messages		
Messenger			• Partner	Create and edit local / remote Partner; Add and manage Partner Certificates
			• Agreements	Add, configure, delete Agreements
			• Settings	Configure general Messenger settings; Add and manage Server Certificates



Area	Symbol	Description	Subnavigation	Description
			<ul style="list-style-type: none"> Activation 	Get licence info; Send activation requests; Install activation and licence
			<ul style="list-style-type: none"> Schema 	Install or update SchemaSets
Listener		Add, configure, delete Listener; Add and manage Listener certificates and Client Certificates		
Hotfolder		Add, configure, delete Hotfolder		
Test Adapter		Send test messages; Ping receiver		
User Admin		Change security settings and settings of others user		

2.1.2.2 Main Navigation (right)




2.1.2.3 Set Messenger instance name

On the navigation bar you see the **Messenger Instance Name**, which can be configured to display a name that easily identifies the system. Further you see how many days are left until the licence expires as well as the user name of the user who is logged-in.

Area	Symbol	Description	Sub-Navigation	Description
User Menu			<ul style="list-style-type: none"> User Settings 	Change your language settings and your password
			<ul style="list-style-type: none"> Product Page (external link) 	Go to PONTON X/P product website
			<ul style="list-style-type: none"> Licence Agreement 	View Licence Agreement
			<ul style="list-style-type: none"> Logout 	Log out of PONTON X/P
Help?		User manuals and link to support portal		

2.1.3 Need help?

Click on the  symbol on the right hand side of the navigation bar, which opens a modal window. Click on the document you want to download and the document is downloaded to your local directory on your computer. The following manuals are available:

- Messenger Documentation
- Release Notes


- System Requirements
- Backend Integration Guide
- Adapter Programming Guide

In addition you find a link to the PONTON X/P support portal under "[Support Panel](#)":

2.1.4 Activate the software (trial version)

Before proceeding to the communication tests, it is required to activate your Messenger. You can run PONTON X/P Messenger as a trial version for up to 60 days. To activate the trial version, go to **MESSENGER**


> **Activation** and click on the "[Mail Activation Request](#)" @ icon. This will open the Dialog "[Request activation with e-mail](#)" containing your activation request.

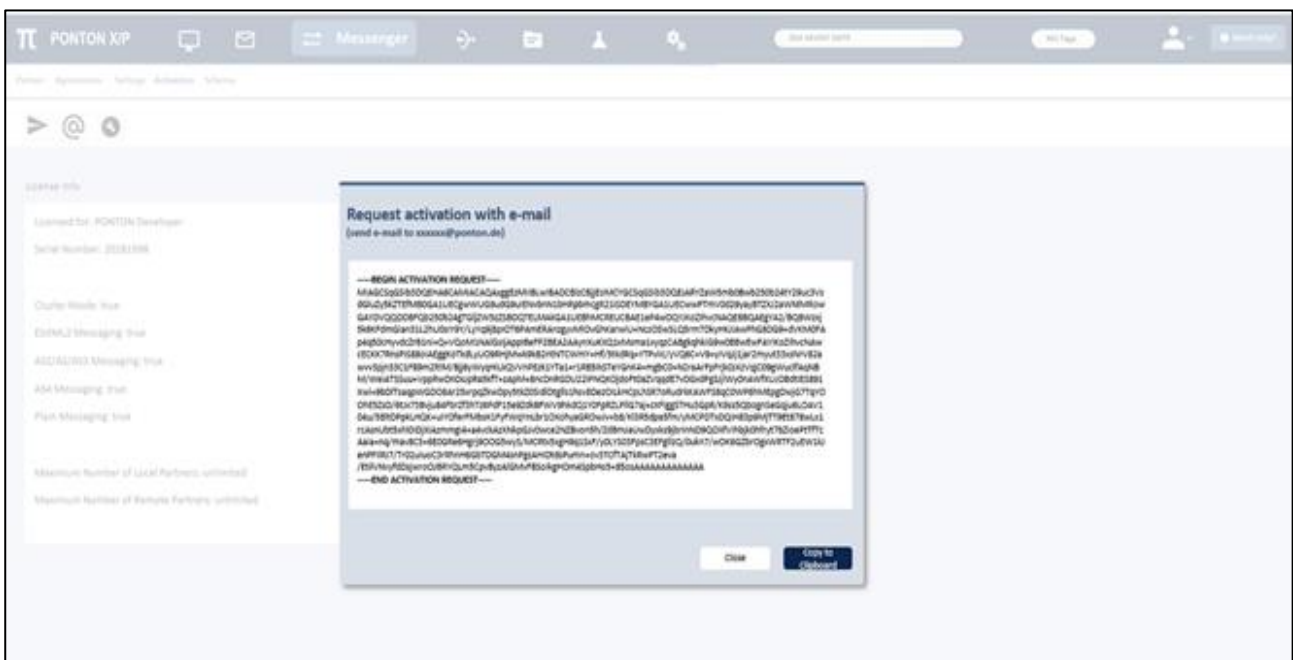

For the trial version, please click on the "[Copy to Clipboard](#)" button at the bottom of the dialog. This will copy the activation request to your clipboard. Please send the activation request to activation@ponton.de with your e-mail client (e.g. Outlook)

You will receive a reply e-mail containing the activation code for your system. Please copy the complete activation code and click on the "[Install Activation/License](#)" icon, paste the activation code into the text box of the install dialog and click on the "[Install](#)" button. The software is now activated.

When sending your activation request by e-mail, it is important to *copy the complete activation request code*, including the lines "---- Begin Activation Request ----" and "---- End Activation Request ----". The same applies when copying the activation code from the reply e-mail into the Install dialog box. Please also ensure to include the "Begin" and "End" lines.

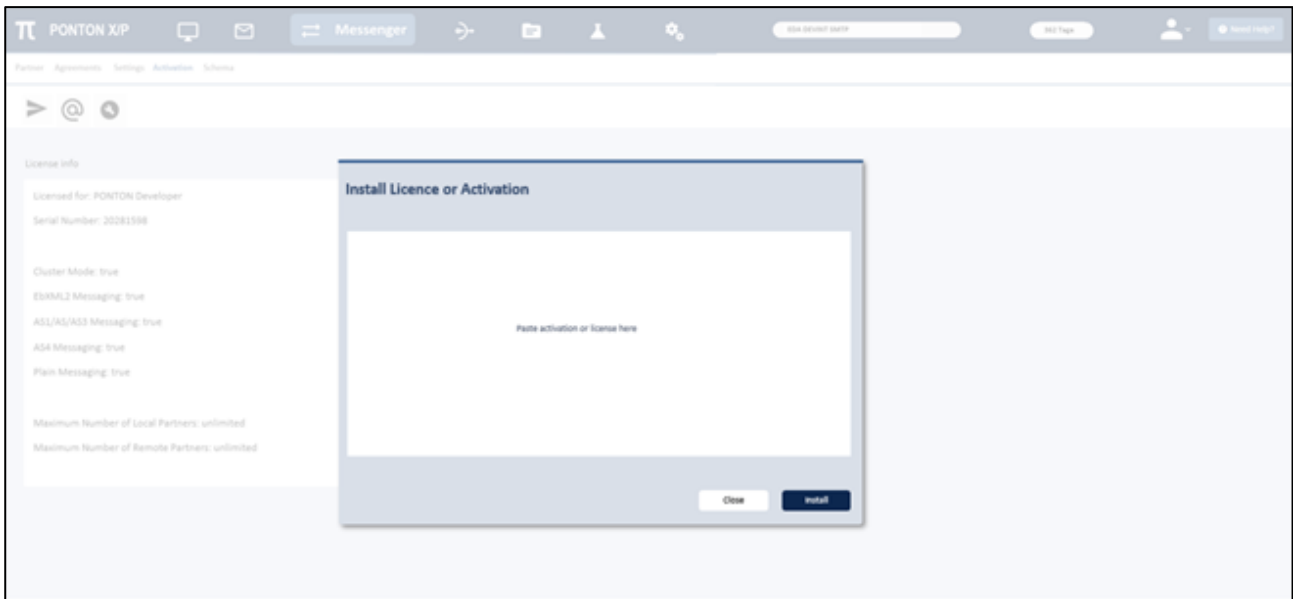

The "Send Activation Request by HTTP" option can only be used after a license has been installed.

2.1.5 Basic configuration

The basic functionality of PONTON X/P is to enable the secure exchange of Messages between business partners. This requires setting up at least two Partner configurations:

- a **Local Partner** (representing your own organization)
- a **Remote Partner** (representing your business partner's organization)

A Partner profile can be seen as representing the communication capability of the respective Partner. A Partner may, for example, support HTTP(S), SMTP and FTP(S) as transport protocols. An Agreement then restricts the capabilities of two Partners to a choice of options that are supported by both sides. In the case of the transport protocol, the partners might define HTTP as the protocol they want to use. If you use the Adapter notification mechanism, any changes in your Partner configuration will be reported to your Adapters. In practice you will exchange messages with a lot of business partners, so you need to define Remote Partner configurations for each business partner.

We recommend to initially set up a test installation preferably in a test environment. It might be easier to install two Messengers on separate PCs within your local environment as you avoid firewall restrictions. However, if you want to immediately test with a Remote Partner, please ensure with your technical administration staff that your firewall is configured to allow the necessary connections.

2.1.5.1 Create a local partner

As mentioned above, the Partner configuration distinguishes between **Local** and **Remote Partners** – this distinction indicates whether the Partner refers to a Local Partner within your own PONTON X/P system or to a Remote Partner on an external system. In certain cases, the configuration steps may differ slightly. For example, you can submit a certificate request for a Local Partner, but not for a Remote Partner. In the case of Remote Partners you would receive the certificate from the Partner directly or by downloading the Partner's profile from the Partner Registry.

See chapter [Partner](#)

Please ensure that identical Party IDs are used in the sender's as well as receiver's messenger configuration – otherwise there will be errors when you attempt to exchange messages with your partners. Other Party ID types can also be used, for example EIC, Duns Number, GLN (Global Location Number) or URI. For a single partner you can create multiple Party IDs by using different Party ID types which need to be configured separately.

2.1.5.2 Create remote partners

To test your Messenger configuration, a Remote Partner is required.

When exchanging partner configurations with your business partners please keep in mind that identical party IDs have to be used in the local partner and remote partner configurations. The partner display names and internal IDs, on the other hand, may be different.

	ABC's local partner config.	ABC's remote partner config.	XYZ's local partner config.	XYZ's remote partner config.
Partner display name	ABC Local	XYZ Global	XYZ Local	ABC Corp
Internal partner ID	ABC015 (ERP ID)	XYZ381 (ERP ID)	401690 (DB ID)	494230 (DB ID)
Party ID	ABC12201	XYZ2950A	XYZ2950A	ABC12201

See chapter [Partner](#)

2.1.5.3 Request certificates for remote partners

If you decide to run your initial tests without installing certificates for your partner configurations, please note that the following settings have to be modified to compensate for the absence of certificates.

- Deactivate the **Signing** and **Encryption** options in **Messenger → Agreements → Configuration > Processing**
- Deactivate the **Use XML Signature** option for **EbXml** in **Messenger → Agreements → Configuration > Packager**

Save the changes by clicking on the save  icon.

A partner certificate will only be accepted after the certificate of the issuing CA (certificate authority) has been installed. Otherwise the trust relationship between the partner and the CA cannot be traced. The certificate for the PONTON CA is automatically included in the default installation. For other certificate authorities you will need to obtain and install the relevant CA certificate. All certificates that you install for one partner will become default certificate in the order of their valid-from date. Alternatively, you can manually select the default certificate and the certificate that should be default when this certificate expires.

See chapter [Certificates](#)


2.1.5.4 Delete a Partner

See chapter [Delete Partners](#)




2.1.5.5 Using the Partner Registry

If your communication partners and you have a common Partner Registry then exchanging partner profiles is very simple.

2.1.5.5.1 Import all profiles

To import all available profiles navigate to **Messenger → Partners → Partners Registry** and select one or several Partner with the checkbox on the left hand side in the table row. The number of selected Partners is displayed next to the import  icon, then click 'Import all'. This automatically imports all available Partner profiles from the registry into your local Messenger. Although, profiles which may collide within already existing Partner profiles within your Messenger will not be imported to avoid overwriting current Partner profiles.

2.1.5.5.2 Update individual profiles

Partner profiles, which have been modified since the last import are not displaying a green check  symbol in the My Partners table. To synchronize the Partner profiles a go to: **MESSENGER**  **Partner > My Partner** **and** select one or several partner with the checkbox on the left hand side in the table row. The number of selected partners is displayed next to the synchronize  icon. Click on the synchronize icon to start the synchronization process. Alternatively, you could activate the option "**Automatic updates**" to enable your Messenger to update all downloaded Partner profiles periodically as described in the section [Create Remote Partner](#).


2.1.5.5.3 Synchronize Partner Profile with the Partner Registry

To synchronize the current Partner configuration with the Partner Registry, go to the Registry tab. If the current partner configuration has not changed since it was last synchronized with the registry, a corresponding message will be displayed.

Please note that the Messenger has to establish a connection with the Partner Registry in order to compare the current Partner configuration with the Partner profile stored in the Partner Registry. For this reason you may experience a short delay when you open the Registry tab.

See chapter [Partner Registry](#)

2.1.5.6 Set up a partner agreement

When the local as well as remote partner configuration is finished the next step is to define an agreement between these two partners, allowing them to successfully communicate with each other. Select **MESSENGER** on the navigation and than **Agreements** in the sub-navigation bar. Click on the "[Add agreement](#)"  icon, which opens the "New Agreement" dialog box. Enter **your local Partner ID** as Partner 1 and **the remote Partner ID** as Partner 2 from the list of available partners. Select an agreement template from the drop-down menu. Then click on the "Next Step" button which brings you to the **Agreement Configuration** page. The Names of the two Partners and the selected template is displayed below the sub-navigation bar. Create the agreement with the default settings.

For further information see chapter [Create a new Agreement](#)

2.1.5.7 Messenger Settings

You can specify how the Messages sent by a Partner will be packaged for transmission and backend processing. It is also possible to define certificates for different packagers such as AS1, AS2, EbXml etc. In that case the agreements created for this partner thereafter will automatically use the packager certificates

as defined in the Partner configuration. You can choose between different packaging standards, that offer diverse options to specify whether the relevant packaging elements will be used by this Partner. EbXML and AS1/AS2/AS3 are most widely used. For details on the specific settings please refer to the descriptions of packaging elements in the 'Partner Agreements' section.

If 'default' certificate is chosen in the packager, the certificate used by the packager will automatically be updated as soon as another certificate is defined as the 'default' partner certificate.


2.1.6 Start communication

2.1.6.1 Check your proxy settings

In case your Messenger is not meant to communicate with external networks directly and/or there is no proxy available in your network for outgoing messages, you could download and install the PONTON X/P Listener as described in [Listener Configuration](#) in PONTON X/P Messenger end user documentation.

2.1.6.2 Send a Ping message

PONTON X/P Messenger is delivered with a built in Test Adapter. It can be used to send EbXml Ping messages to test the connectivity between your own messenger and your business partner. Click on **Test Adapter** on the navigation bar to access the test adapter. Please read the section [Test Adapter](#) in PONTON X/P Messenger end user documentation for further information.

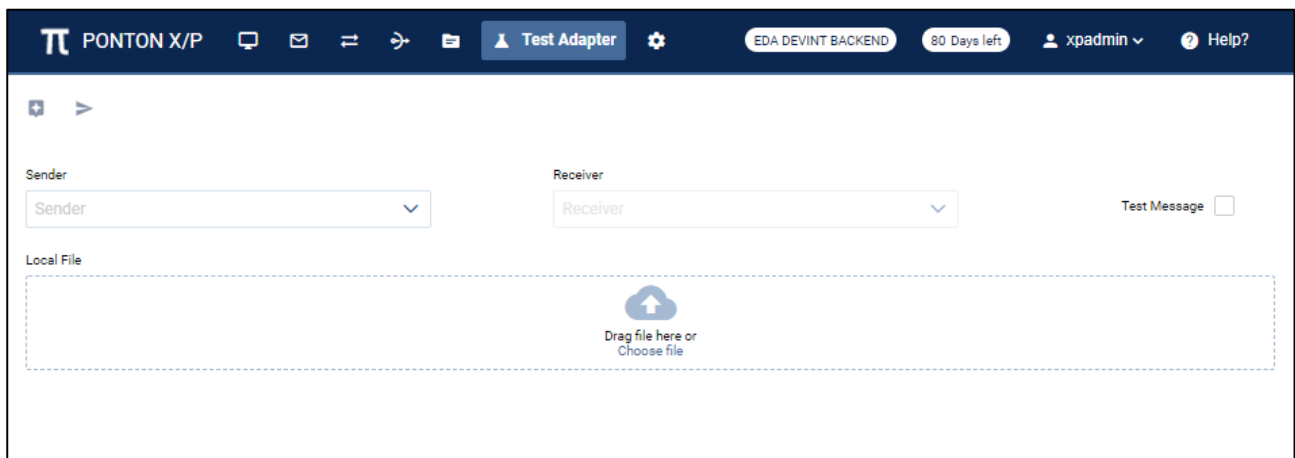

The screenshot shows the PONTON X/P Test Adapter interface. The top navigation bar includes the PONTON logo, the text 'PONTON X/P', and several icons. A 'Test Adapter' button is highlighted. The main area contains two dropdown menus labeled 'Sender' and 'Receiver', both with 'Sender' and 'Receiver' selected. To the right of these is a 'Test Message' checkbox. Below the dropdowns is a 'Local File' section with a dashed border and a cloud icon with an upward arrow, with the text 'Drag file here or Choose file' below it.

2.1.7 View Messages in the Message Monitor

Please read the section [Message Monitor](#)

2.2 Security recommendations

2.2.1 Updating of Java Runtime

In the PONTON X/P distribution the latest compatible Java Version is delivered. It is recommended to update PONTON X/P periodically (every six months). The X/P Messenger patches update the PONTON program code and also the Java Runtime Version.

2.2.2 Encrypt database communication

The communication between PONTON X/P and the database can only be encrypted if both support the encryption and if it is turned on. The required configuration depends on the used database driver in the Messenger. The configuration can be changed with the PONTON X/P GUI as follows:

Go to the database settings in MESSENGER > Settings and configure the database URL accordingly:

- Database URL for Oracle (Oracle Database JDBC Driver)
 - jdbc:oracle:thin:@(DESCRIPTION=(ADDRESS=(PROTOCOL=tcps)(HOST=servername)(PORT=2484))(CONNECT_DATA=(SERVICE_NAME=service)))
 - You find further details here: <https://docs.oracle.com/en/database/oracle/oracle-database/19/jjdbc/client-side-security.html>
- Database URL for MS SQL Server (Microsoft JDBC Driver)
 - jdbc:sqlserver://serverhost:1433;databaseName=AdventureWorks;encrypt=true;trustServerCertificate=true
 - You find further details here: <https://docs.microsoft.com/en-us/sql/connect/jdbc/connecting-with-ssl-encryption>
- Database URL for MySQL (MySQL Connector/J)
 - jdbc:mysql://serverhost:3306/database?useSSL=true
 - You find further details here: <https://dev.mysql.com/doc/connector-j/en/connector-j-reference-using-ssl.html>

2.2.3 Strict SSL check when sending messages

In the messenger default configuration the issuer certificate is not checked when transmitting messages. You can activate that in the PONTON X/P GUI as follows:

1. Go to Messenger > Settings > General Settings and select the accordion tab > Communication
2. Enable "SSL Server Certificate check" with the checkbox
3. Click on „Save settings“ in the top bar
4. Stop and Start the Messenger

2.2.4 Replace default SSL certificate in Listener

Listener certificates can be changed under LISTENER> LISTENER CERTIFICATES in the PONTON X/P GUI. Please follow the following steps, a manual restart of the Listener is not required.

1. Got to Server Certificates tab
2. Check if the following subject of the certificate is there: "CN=localhost"
3. If yes, a new corresponding certificate must be requested
4. Click on request certificate
5. Please enter the entire domain-name or public IP of the Listener in the field "SAN Value" and in the field "Certificate name"
6. Once you have filled out the other fields click on request certificate
7. Copy the certificate request and raise a CSR support ticket in PONTONs Service Desk

8. Before you install the SSL Server Certificate check "Update CA certificate" below
9. Install SSL Server Certificate

2.2.5 Disable weak TLS-ciphers in the Listener

Weak TLS encryption in the Listener can be switched of as follows:

1. In the installation directory of the Listener you find in the /config folder the file "Listener.properties"
2. Open the file in a text editor
3. Replace the code line „SSLDisabledCiphers“ with the following code line:
4. „SSLDisabledCiphers = *EXPORT*,*anon*,*DES*,*_DH*,*NULL*,*SHA“
5. Save the file
6. Stop and start the Listener

2.2.6 Update CA certificate

Versions 3.7.0 and below of the PONTON XP Messengers und Listeners were distributed with a PONTON Root CA certificate that is now outdated. This certificate must be replaced with the latest PONTON Root CA certificate:

```
-----BEGIN CERTIFICATE-----
MIIEMjCCAxqgAwIBAgIJAK46AzQ+zY+NMA0GCSqGSIb3DQEBCwUAMIGdMQswCQYD
VQQGEwJERTEQMA4GA1UEBxMHSzGfYnVYzZEFMB0GA1UEChMWUG9udG9uIENvbnN1
bHRpbmcgR21iSDEYMBYGA1UECzMPTmV0d29yaYBTZXJ2aWNlMRcwFQYDVQDEw5Q
b250b24gUm9vdCBBDQTEoMCYGCsQSIb3DQEJARYZaW5mb0Bwb250b24tY29uc3Vs
dGluZy5kZTAeFw0xMzA5MTcxMjMzMzhaFw00MzA5MTAxMjMzMzhaMIGdMQswCQYD
VQQGEwJERTEQMA4GA1UEBxMHSzGfYnVYzZEFMB0GA1UEChMWUG9udG9uIENvbnN1
bHRpbmcgR21iSDEYMBYGA1UECzMPTmV0d29yaYBTZXJ2aWNlMRcwFQYDVQDEw5Q
b250b24gUm9vdCBBDQTEoMCYGCsQSIb3DQEJARYZaW5mb0Bwb250b24tY29uc3Vs
dGluZy5kZTCCASIwDQYJKoZIhvcNAQEBBQADggEPADCCAQoCggEBAMcXG30x4Whw
WIoKZAEycUXMd0Q8vYrWWHfgvD4kH4eyIyZ8AStkd8cMHDqkYJAszPL0pFwIPEM0
bGcxgCNCUvzWlsyc9Ia7gv7cV6lpG/HFO6fk5jH9phKsJnvKHHWf/WuIb5j/KlVR
pQ/3wRuVD1zNSs4J25eAHzO2I5xMvVaUJoNU71WFsBNwPF39YKFZWnjpgxSaQPFE
dba+xi55vQzIPq+7ZMsEth736pqQXRym3hSkftYmstdPbNVaUOXHabOe92qrr84l
bevURoVtBXCUBRX+n09aEbw6jufRWQEz9TCEG01/JWoQonaWvNEi9N/V8bsvQvqS
hk3VyhTE8P8CAwEAAANzMHEwCwYDVR0PBAQDAgEGMA8GA1UdEwQIMAYBAf8CAQAw
HQYDVROOBByEFDPyUbiXrsoLT6TA3+pJNns3wzErMB8GA1UdIwQYMBaAFDPyUbiX
rsoLT6TA3+pJNns3wzErMBEGCWCsAGG+EIBAQQEAWIABzANBgkqhkiG9w0BAQsF
AAOCAQEAOaKrf5yxLiHPWpFqWUSlE6tP1kBFY4OKKG6omRUgruf9h+AqWYlpn4QP
qd1hS6OnGochJgw8F4dDFcmO3IYcGwdpF+2KfMvJB5NNYHja9PFN7rX2tooSyRNj
T3bHyFVnWwET58U2uqBO6y/S1qEErppBbFPZcfGS8eSQ+F3cz8b05QG5RQYTuP6V
Wk+fHScy05b05gAhKVdhpAh0ebpfSpyko19f2mcPRZ2WAJyzmthzqHtunlN8zf1
ONLmM809tsr5qOhh4gnILlF8cuNKNCo671YBVD5MYpWq7rO4PO58vm03cvPszkHL
c05Ms+BvYqg14GLDxMeoa72aa9/t6w==
-----END CERTIFICATE-----
```

Code Block 1 PONTON Root CA Certificate

Please follow the following procedure in order to update the PONTON Root CA Certificate:

1. Go to LISTENER > LISTENER CERTIFICATES in the PONTON X/P GUI
2. Select „Install CA certificate“ and install the certificate shown above
3. You will receive an error Message as the old certificate will be overwritten
4. Enable checkbox “Overwrite certificate” and save again
5. Go to “Client Certificates” and repeat installation steps
6. Go to MESSENGER > SETTINGS
7. Select “Server Certificate” and repeat installation steps


3 Graphical User Interface Quick Starter

Please find below a simple guidance on how to use the PONTON X/P User Interface.

3.1 Find your way around


Navigating through the PONTON X/P Messenger is easy. The following navigation overview is helping you to quickly get you where you want to be and always ensures that you know where you are in the application.

- 1 **Main Navigation bar:** Enables you to navigate through the main functional areas of the PONTON X/P Messenger such as **Monitor**, **Messages**, **Messenger**, **Listener**, **Hotfolder**, **Test Adapter** and **User Admin**.
- 2 **Sub-menu bar:** Enables you to find subordinate segments of the main areas e.g. Messenger, which is separated into **Partner**, **Agreements**, **Settings**, **Activation**, **Schema** and **Multicast Rules**.
- 3 **Tabs:** Enables you to toggle between separated parts of a coherent functional application.
- 4 **Quick Action Bar:** When you hover with your mouse over items in the table the quick action bar will appear, enabling you to view or edit the selected item.

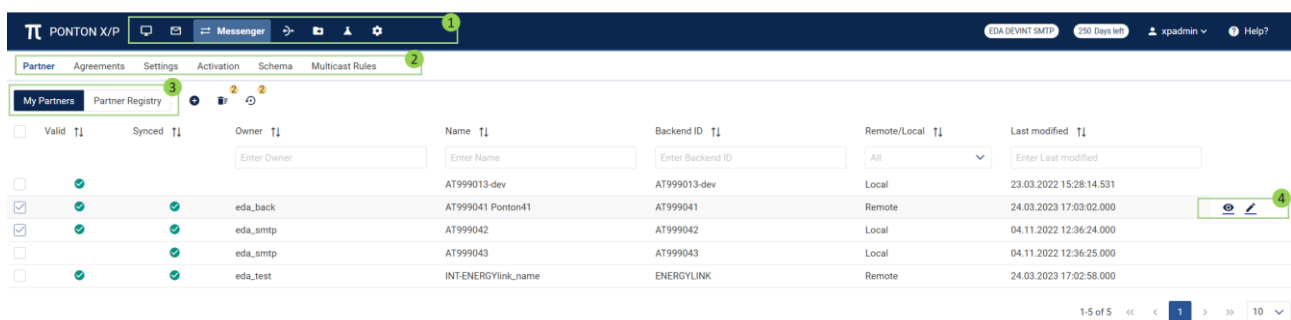

3.2 Select and execute actions


- 1 **Select Table Row(s):** Click on the checkbox to select or deselect the item (e.g. Partner, Agreement) you want to process. The number of selected item, which are actionable, is displayed next to the action icon.
- 2 **Toolbar:** When you have selected at least one actionable item you can click on the available action icon to execute the command. An icon tool-tip provides you with a hint about the underlying action.
- 3 **Create:** In order to create new **Partners (Local and Remote)**, **Agreements** and **Hotfolder Adapters** click on the + icon in the action bar.

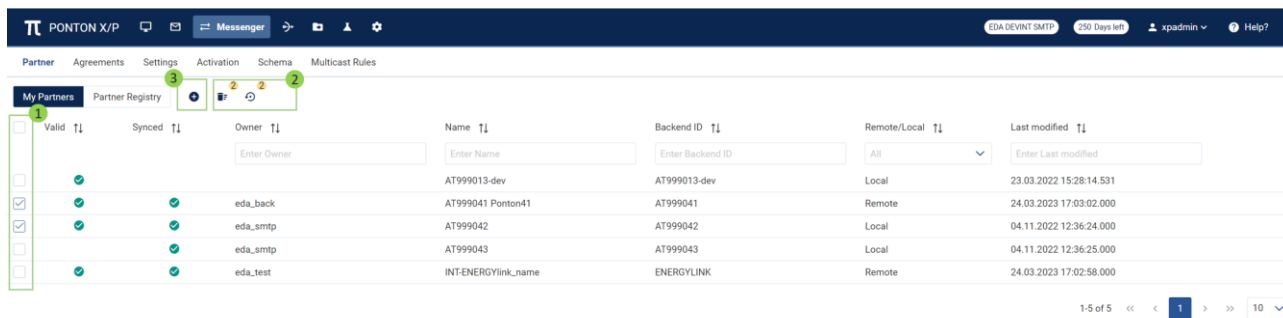

Valid	Synced	Owner	Name	Backend ID	Remote/Local	Last modified
<input type="checkbox"/>	<input checked="" type="checkbox"/>	eda_back	AT999013-dev	AT999013-dev	Local	23.03.2022 15:28:14.531
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	eda_sntp	AT999041 Ponton41	AT999041	Remote	24.03.2023 17:03:02.000
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	eda_sntp	AT999042	AT999042	Local	04.11.2022 12:36:24.000
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	eda_sntp	AT999043	AT999043	Local	04.11.2022 12:36:25.000
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	eda_test	INT-ENERGYlink_name	ENERGYLINK	Remote	24.03.2023 17:02:58.000

3.3 Arrange your data


- 1 **Filter:** Some table headings have a filter functions. Enter values in the filter text box and the table displays only values which contain the entered filter value. Filters can be combined.
- 2 **Sorting:** All table headings have a sort function. You can sort ascending and descending.
- 3 **Pagination:** The default pagination is 10 entries per page and can be changed to 25 or 50. Up to five pages are displayed in the page toggle bar, you can move forward or backward by clicking on the page number, the forward / backward icons or the first page / last page icon. The active page is highlighted in blue.

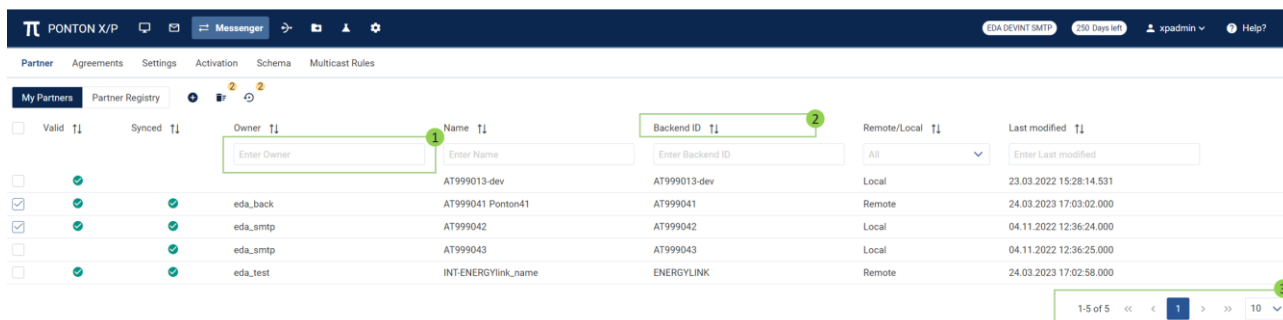

Valid	Synced	Owner	Name	Backend ID	Remote/Local	Last modified
<input type="checkbox"/>	<input checked="" type="checkbox"/>	eda_back	AT999013-dev	AT999013-dev	Local	23.03.2022 15:28:14.531
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	eda_sntp	AT999041 Ponton41	AT999041	Remote	24.03.2023 17:03:02.000
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	eda_sntp	AT999042	AT999042	Local	04.11.2022 12:36:24.000
<input type="checkbox"/>	<input checked="" type="checkbox"/>	eda_sntp	AT999043	AT999043	Local	04.11.2022 12:36:25.000
<input type="checkbox"/>	<input checked="" type="checkbox"/>	eda_test	INT-ENERGYlink_name	ENERGYLINK	Remote	24.03.2023 17:02:58.000

3.4 Change your settings and log-out


- 1 **Change your settings:** Change your language settings and password.
- 2 **Log-out:**

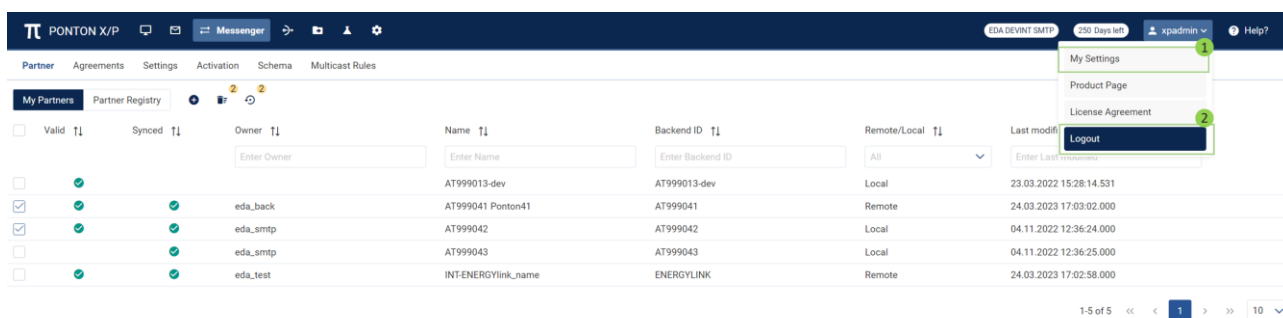

Valid	Synced	Owner	Name	Backend ID	Remote/Local	Last modified
<input type="checkbox"/>	<input checked="" type="checkbox"/>	eda_back	AT999013-dev	AT999013-dev	Local	23.03.2022 15:28:14.531
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	eda_sntp	AT999041 Ponton41	AT999041	Remote	24.03.2023 17:03:02.000
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	eda_sntp	AT999042	AT999042	Local	04.11.2022 12:36:24.000
<input type="checkbox"/>	<input checked="" type="checkbox"/>	eda_sntp	AT999043	AT999043	Local	04.11.2022 12:36:25.000
<input type="checkbox"/>	<input checked="" type="checkbox"/>	eda_test	INT-ENERGYlink_name	ENERGYLINK	Remote	24.03.2023 17:02:58.000


3.5 Configure settings

- 1 **Configure:** Open a configuration page (**Partner, Agreements, Listener, Hotfolder, Messenger Settings**), make the required changes by using drop-down menus, check-boxes, input fields etc. and click on save icon.
- 2 **Hide/unhide:** Use the accordion tabs to organize the layout.

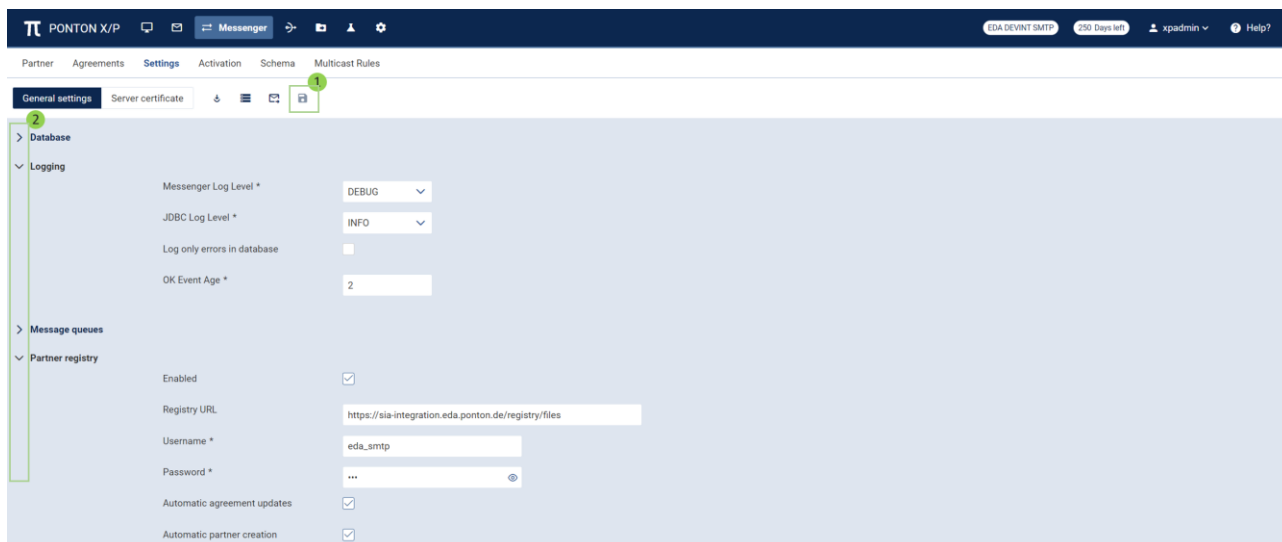


4 Main Navigation

4.1 Log-in





Please enter your username and password for logging-in to PONTON X/P. You can view the entered password by clicking on the view symbol .

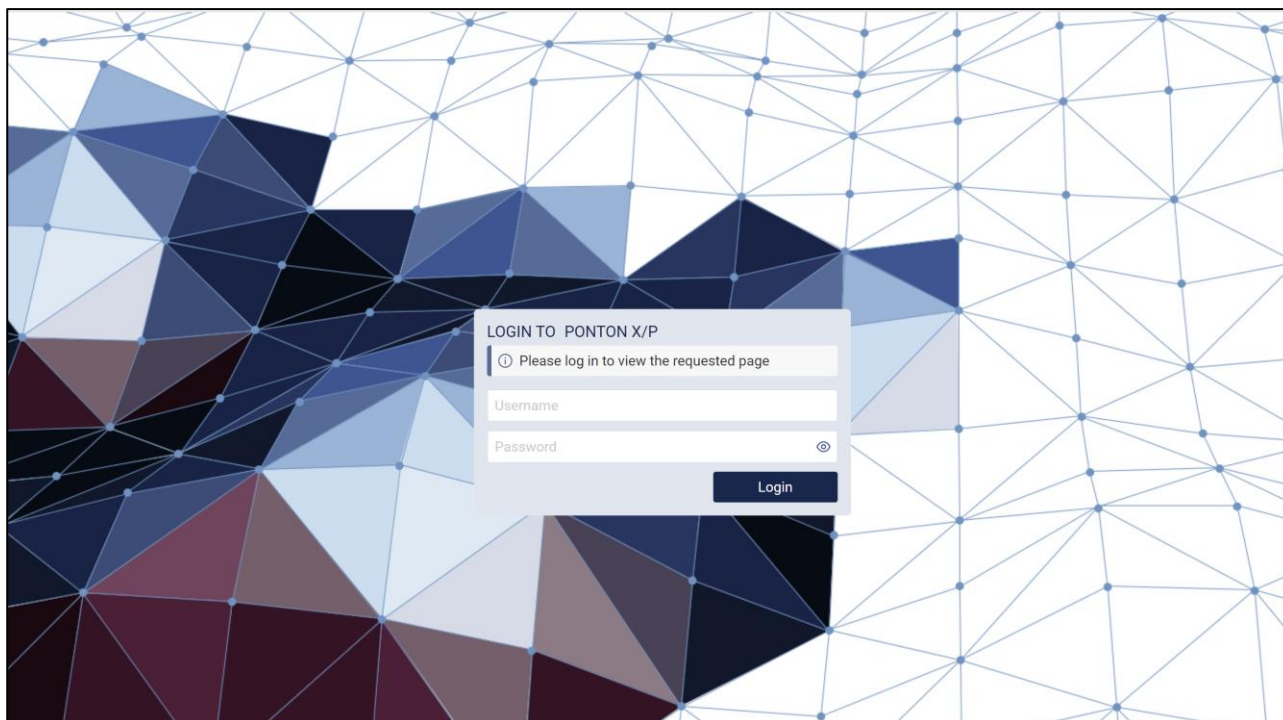



Failed login

If your login attempt failed you will not get any feedback why it failed. You will also not receive a notification that your account has been blocked due to too many failed attempts. This is best practice with regards to security.




4.2 Main Navigation (left)

				
Area	Symbol	Description	Subnavigation	Description
Monitor			• Dashboard	
			• Adapter Status	
Messages		View Messages and its details, Resend and Delete Messages		
Messenger			• Partner	Create and edit own / communication Partner; Add and manage Partner Certificates
			• Agreements	Add, configure, delete Agreements
			• Settings	Configure general Messenger settings; Manage Server Certificate
			• Activation	Get license info; Send activation requests; Install activation and license
			• Schema	Install or update SchemaSets

Area	Symbol	Description	Subnavigation	Description
			<ul style="list-style-type: none"> Multicast Rules 	Define Rules for Message duplication
Listener		Remote configuration of the connected Listener; Manage Listener Certificate and Client certificates		
Hotfolder		Add, configure, delete Hotfolder		
Test Adapter		Send test Messages; Ping receiver		
User Admin		Manage user accounts		



4.3 Main Navigation (right)



4.3.1 Set Messenger instance name



On the navigation bar you see the **Messenger Instance Name** which can be changed to display a name that easily identifies the system. It is configured on the [Messenger >Settings](#) page.

Further you see how many days are left until the license expires as well as the user name of the user who is logged-in.

Area	Symbol	Description	Sub-Navigation	Description
User Menu			<ul style="list-style-type: none"> User Settings 	Change your language settings and your password
			<ul style="list-style-type: none"> Logout 	Log out of PONTON X/P
Help?			<ul style="list-style-type: none"> Manuals and release notes links 	
			<ul style="list-style-type: none"> Support Portal (external link) 	Go to PONTON X/P support website
			<ul style="list-style-type: none"> Product Page (external link) 	Go to PONTON X/P product website
			<ul style="list-style-type: none"> UI-3rd party licenses 	list all 3rd party libraries used for the UI and their licenses
			<ul style="list-style-type: none"> Java-3rd party licenses 	list all 3rd party libraries used for the Java backend and their licenses

4.4 User Menu





4.4.1 Change your language settings

Click on the  username  icon so that the user menu drop-down opens and select "[User Settings](#)". Select the language you want from the drop-down menu. Click on the "[Save Settings](#)" button which becomes active when you have selected a new language.

Browser default language

When you select "browser default language" and PONTON X/P does not support your browser default language it will select English as default language.

4.4.2 Change your password

Click on the  username  icon so that the user menu drop-down opens and select "[User Settings](#)". Type in your current password as well as the new password and repeat password. The new and repeat password must match and meet the password criteria. You can view the password you have entered by clicking on the symbol  or hide it by clicking on the symbol . The password criteria are as follows:

- minimal length of 12 characters
- at least one upper case letter
- at least one lower case letter
- at least one number
- at least one special character

When you have entered all three passwords, and they are valid and matching, the "[Save Password](#)" button becomes active.


4.4.3 Log-out


Click on the  username  icon so that the user menu drop-down opens and click on the "[Log-out](#)" button.

5 Monitor

5.1 Dashboard

Go to: **MONITOR**  > **Dashboard**

After logging in to the PONTON XP Messenger the Monitor Dashboard screen is displayed. The Monitor Dashboard is showing information about the current server configuration and the status of different Messenger processes (Threads). You can always navigate back to the Monitor Dashboard by clicking on the **Monitor**  icon on the navigation bar.

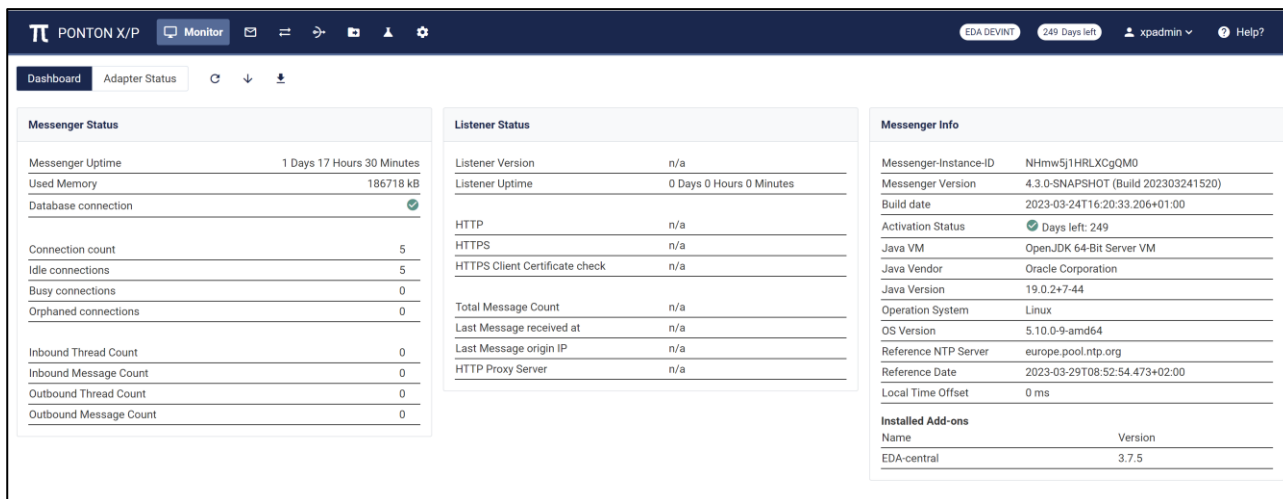

The screenshot shows the PONTON X/P Monitor Dashboard. The top navigation bar includes the PONTON logo, 'PONTON X/P', a 'Monitor' button, and user information (EDA DEVINT, 249 Days left, xpadmin, Help?). The dashboard is divided into three main sections:

- Messenger Status:**

Messenger Uptime	1 Days 17 Hours 30 Minutes
Used Memory	186718 kB
Database connection	
Connection count	5
Idle connections	5
Busy connections	0
Orphaned connections	0
Inbound Thread Count	0
Inbound Message Count	0
Outbound Thread Count	0
Outbound Message Count	0
- Listener Status:**

Listener Version	n/a
Listener Uptime	0 Days 0 Hours 0 Minutes
HTTP	n/a
HTTPS	n/a
HTTPS Client Certificate check	n/a
Total Message Count	n/a
Last Message received at	n/a
Last Message origin IP	n/a
HTTP Proxy Server	n/a
- Messenger Info:**

Messenger-Instance-ID	NHmw5j1HRLXcgQMO
Messenger Version	4.3.0-SNAPSHOT (Build 202303241520)
Build date	2023-03-24T16:20:33.206+01:00
Activation Status	Days left: 249
Java VM	OpenJDK 64-Bit Server VM
Java Vendor	Oracle Corporation
Java Version	19.0.2+7-44
Operation System	Linux
OS Version	5.10.0-9-amd64
Reference NTP Server	europe.pool.ntp.org
Reference Date	2023-03-29T08:52:54.473+02:00
Local Time Offset	0 ms

Installed Add-ons

Name	Version
EDA-central	3.7.5

5.1.1 Restart Messenger

In case you want to restart the Messenger click on the restart  icon. You need to confirm the restart. While the Messenger is restarted the connection to the server is lost and the PONTON X/P Messenger can not be used. The database connection symbol is displaying a  symbol and there is no other status information visible on the Dashboard. When the server connection is established again, the database connection symbol is displaying a  symbol and the PONTON X/P Messenger can be used again.

5.1.2 Download config files

Click on the download config files icon  to download the config files to a download folder in your local system.


5.1.3 Download log files

Click on the download log files icon  to download the log files to a download folder in your local system.

5.2 Adapter Status

Go to: **MONITOR**  > **Adapter Status**

PONTON X/P Monitor EDA DEVINT 249 Days left xpadmin Help?				
Dashboard Adapter Status				
<input type="checkbox"/>	Adapter ID ↑↓	Adapter URL ↑↓	Status ↑↓	Threads ↑↓
<input type="checkbox"/>	AS4CertificateUpdateAdapter	INTERNAL	✓	1
<input checked="" type="checkbox"/>	GatewayAdapter	http://127.0.0.1:10202/v3.8.0/	✓	8
<input type="checkbox"/>	GatewaySenderAdapter	http://127.0.0.1:10210/v3.8.0/	✓	20
<input type="checkbox"/>	MessageMulticastAdapter	INTERNAL	✓	1
<input type="checkbox"/>	NullAdapter	INTERNAL	✓	10
<input type="checkbox"/>	PingAll	INTERNAL	✓	5
<input type="checkbox"/>	TestAdapter	INTERNAL	✓	3
<input type="checkbox"/>	hotfolder-1	INTERNAL	✓	2
<div> << < 1 > >> </div> <div>10</div>				



An overview of the adapters connected with the PONTON X/P Messenger can be obtained by clicking on the **"Adapter Status"** tab next to the Dashboard tab. If the symbol in the status column is showing a check mark symbol  which means that the adapter is working and accepting messages.

All table heading have a **Sort** function (icon). Sort can be ascending and descending. Underneath the table in the bottom right corner you find a **Pagination**. function The default pagination is 10 entries per page and can be changed to 25 or 50. Up to five pages are displayed in the page toggle bar, you can move forward or backward pages by clicking on the page number, the forward backward icons or the first page last page icon. The active page is highlighted in blue.

Adapters

Adapters running as embedded adapters are shown with an adapter URL as INTERNAL, these adapters cannot be deleted. Depending on the adapter type, there will be additional status information in the comment column.

5.2.1 Delete Adapter reference(s)


If an external adapter is no longer required, then the Adapter reference can be deleted manually. To delete Adapter reference(s) select the Adapter reference you want to delete with the checkbox on the left hand side of the table row. With the checkbox in the headings row you can select all Adapters. The number of selected Adapters is displayed above the delete  icon. Click on the delete  icon and confirm that you want to delete the selected Adapter references. When clicking on the **"OK"** button on the confirmation dialog, the Adapters will no longer be displayed in the table.

Adapters using the adapter API 2.0 will be shown with an adapter URL using websocket (wss) as protocol. Authorization of an adapter connected via API 2.0 is performed using the instance ID at the end of the adapter URL.

6 Message Monitor

Go to: **MESSAGES** 

Messages sent and/or received by your Messenger can be viewed and filtered with the Message monitor.

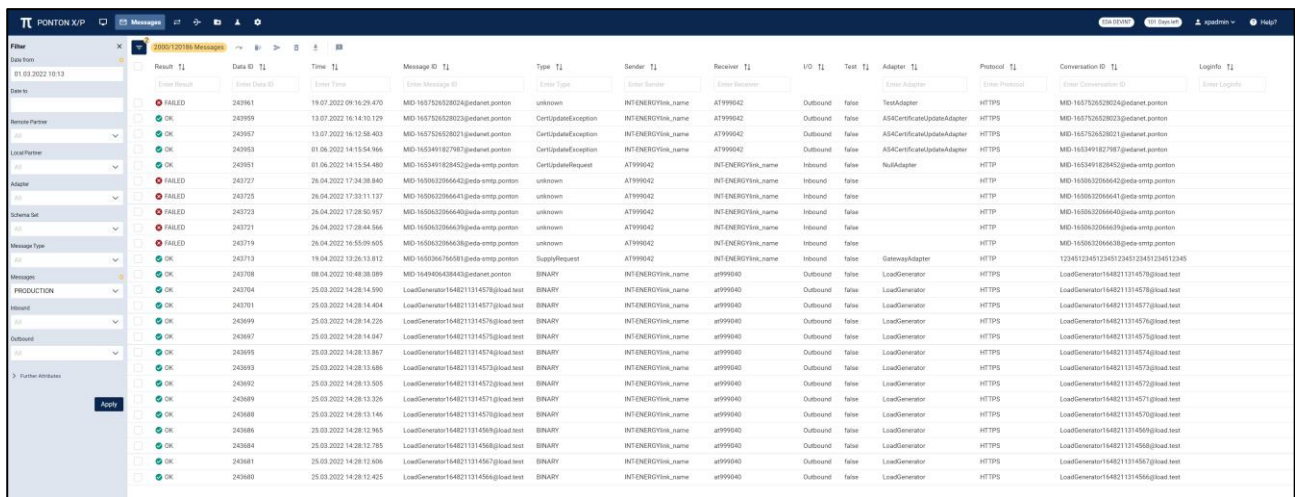

Filter	Result	Data ID	Time	Message ID	Type	Sender	Receiver	I/O	Test	Adapter	Protocol	Conversation ID	Logfile
Remote Partner	OK	243961	19.07.2022 09:16:29.470	MD-1657626528023@edantest.ponton	unknown	INT-ENERGYVim_name	AT999042	Outbound	false	TestAdapter	HTTPPS	MD-1657626528023@edantest.ponton	
Local Partner	OK	243957	19.07.2022 16:13:58.403	MD-1657626528023@edantest.ponton	CertificateException	INT-ENERGYVim_name	AT999042	Outbound	false	AS4CertificateAdapter	HTTPPS	MD-1657626528023@edantest.ponton	
Adapter	OK	243953	01.06.2022 14:15:54.966	MD-1653491827987@edantest.ponton	CertificateRequest	INT-ENERGYVim_name	AT999042	Outbound	false	AS4CertificateAdapter	HTTPPS	MD-1653491827987@edantest.ponton	
Schema Set	FAILED	243727	26.04.2022 17:34:38.840	MD-1650632066643@edantest.ponton	unknown	INT-ENERGYVim_name	AT999042	Inbound	false	NullAdapter	HTTPPS	MD-1650632066643@edantest.ponton	
Message Type	OK	243725	26.04.2022 17:33:11.137	MD-1650632066643@edantest.ponton	unknown	AT999042	INT-ENERGYVim_name	Inbound	false		HTTPPS	MD-1650632066643@edantest.ponton	
Messages	OK	243723	26.04.2022 17:28:50.957	MD-1650632066643@edantest.ponton	unknown	AT999042	INT-ENERGYVim_name	Inbound	false		HTTPPS	MD-1650632066643@edantest.ponton	
Production	OK	243721	26.04.2022 17:28:44.566	MD-1650632066643@edantest.ponton	unknown	AT999042	INT-ENERGYVim_name	Inbound	false		HTTPPS	MD-1650632066643@edantest.ponton	
Inbound	OK	243719	26.04.2022 16:55:09.805	MD-1650632066643@edantest.ponton	unknown	AT999042	INT-ENERGYVim_name	Inbound	false		HTTPPS	MD-1650632066643@edantest.ponton	
Outbound	OK	243713	19.04.2022 13:26:13.812	MD-1650632066643@edantest.ponton	SupplyRequest	INT-ENERGYVim_name	AT999042	Inbound	false	GatewayAdapter	HTTPPS	MD-1650632066643@edantest.ponton	
	OK	243708	08.04.2022 10:48:38.089	MD-164906435443@edantest.ponton	BINARY	INT-ENERGYVim_name	AT999040	Outbound	false	LoadGenerator	HTTPPS	MD-164906435443@edantest.ponton	
	OK	243704	25.03.2022 14:28:14.590	LoadGenerator1648211314578@load test	BINARY	INT-ENERGYVim_name	AT999040	Outbound	false	LoadGenerator	HTTPPS	MD-164906435443@edantest.ponton	
	OK	243701	25.03.2022 14:28:14.404	LoadGenerator1648211314577@load test	BINARY	INT-ENERGYVim_name	AT999040	Outbound	false	LoadGenerator	HTTPPS	MD-164906435443@edantest.ponton	
	OK	243699	25.03.2022 14:28:14.226	LoadGenerator1648211314576@load test	BINARY	INT-ENERGYVim_name	AT999040	Outbound	false	LoadGenerator	HTTPPS	MD-164906435443@edantest.ponton	
	OK	243697	25.03.2022 14:28:14.047	LoadGenerator1648211314575@load test	BINARY	INT-ENERGYVim_name	AT999040	Outbound	false	LoadGenerator	HTTPPS	MD-164906435443@edantest.ponton	
	OK	243695	25.03.2022 14:28:13.867	LoadGenerator1648211314574@load test	BINARY	INT-ENERGYVim_name	AT999040	Outbound	false	LoadGenerator	HTTPPS	MD-164906435443@edantest.ponton	
	OK	243693	25.03.2022 14:28:13.686	LoadGenerator1648211314573@load test	BINARY	INT-ENERGYVim_name	AT999040	Outbound	false	LoadGenerator	HTTPPS	MD-164906435443@edantest.ponton	
	OK	243692	25.03.2022 14:28:13.505	LoadGenerator1648211314572@load test	BINARY	INT-ENERGYVim_name	AT999040	Outbound	false	LoadGenerator	HTTPPS	MD-164906435443@edantest.ponton	
	OK	243689	25.03.2022 14:28:13.326	LoadGenerator1648211314571@load test	BINARY	INT-ENERGYVim_name	AT999040	Outbound	false	LoadGenerator	HTTPPS	MD-164906435443@edantest.ponton	
	OK	243688	25.03.2022 14:28:13.146	LoadGenerator1648211314570@load test	BINARY	INT-ENERGYVim_name	AT999040	Outbound	false	LoadGenerator	HTTPPS	MD-164906435443@edantest.ponton	
	OK	243686	25.03.2022 14:28:12.965	LoadGenerator1648211314569@load test	BINARY	INT-ENERGYVim_name	AT999040	Outbound	false	LoadGenerator	HTTPPS	MD-164906435443@edantest.ponton	
	OK	243684	25.03.2022 14:28:12.785	LoadGenerator1648211314568@load test	BINARY	INT-ENERGYVim_name	AT999040	Outbound	false	LoadGenerator	HTTPPS	MD-164906435443@edantest.ponton	
	OK	243681	25.03.2022 14:28:12.606	LoadGenerator1648211314567@load test	BINARY	INT-ENERGYVim_name	AT999040	Outbound	false	LoadGenerator	HTTPPS	MD-164906435443@edantest.ponton	
	OK	243680	25.03.2022 14:28:12.425	LoadGenerator1648211314566@load test	BINARY	INT-ENERGYVim_name	AT999040	Outbound	false	LoadGenerator	HTTPPS	MD-164906435443@edantest.ponton	

6.1 Filter Messages

6.1.1 Select filter criteria

A date picker with date/month/year and hour/minutes is available for the following criteria:

- **From** - filter messages created after the entered 'from' time (local server time), default filter setting: today-1 00:00
- **To** - filter messages created before the entered 'to' time

A multi-select drop-down-list with search function (type in filter value into search text field above the drop-down-menu) is available for the following filter criteria:

- **Remote Partner** - involved communication partner
- **Local Partner** - involved own partner
- **Adapter** - involved adapter
- **Schema Set** - schemaset of the processed message
- **Message Type** - message code according to schemaset
- **Messages** - characteristic of the message (PRODUCTION, TEST or SIGNAL) with PRODUCTION as default filter setting.
- **Inbound** - state of the inbound message
- **Outbound** - state of the outbound message

Active filter have a yellow dot next to filter indicating that the filter was selected. The Filter Badge shows the number of active filters.


6.1.2 Set further message filter attributes

An additional text filter is available for the following input fields:

Like Search

Use '%' as wildcard symbol for a like search

- **Protocol Info** - protocol info of the processed message.
- **Message ID** - message ID of the processed message.
- **Conversation ID** - conversation ID of the processed message.

Click on the Toolbar  icon in order to hide or show the filter bar. Alternatively you can close the filter bar by clicking on the **x** icon in the top right corner of the filter bar.

6.2 View Messages and trigger message Actions

Select your filter criteria and click on the "Apply" button to get all Messages which match the filter criteria in the Messages table. The number of messages which meet the filter criteria is displayed in the yellow badge next to the filter icon. The Messages table displays a list of all Messages. The filter results are ordered by message timestamp descending (newest first). Each time a search has been successfully finished the user receives a success message, indicating that the search was finished, even though no new entries were found.

Records Found

As the amount of records can be very large with too wide filter settings, a fixed maximum number of records is returned with the filter (e.g 2000, this is configurable). The total number of found records is displayed (e.g. 2000 / 100.000 - which means 2000 messages were returned, but 100.000 were found with this filter criteria. Pagination and sorting in the GUI table is done within the initial result set. To retrieve a new set of records the filter criteria must be changed and applied by clicking on the "Apply" button again.



6.2.1 Table headings

- **Result** - Status of Message (OK, Failed, In Process, In Transit, Archived) with graphical representation with icon.
- **Data ID** - Technical unique ID of the processed message
- **Time** - Time when message was created in local server time
- **Message ID** - Message ID of the processed message
- **Type** - Message type according to schemaset
- **Sender** - Name of ID of sender
- **Receiver** - Name of ID of receiver
- **I/O** - Inbound or Outbound direction
- **Test** - Test messages = true
- **Adapter** - Adapter ID of the involved adapter
- **Protocol** - Protocol info of the processed message
- **Conversation ID** - Conversation ID of the processed message
- **Loginfo** - Log Info of the processed message



The following functions are available to easily find the table entry in the Messages you are looking for:

- All table heading have a **Sort** function (icon). Sort can be ascending and descending.
- Some table Headings have a **Filter** functions. Enter values in the filter text box and the table displays only values which contain the entered filter value. Filters can be combined.
- Underneath the table in the bottom right corner you find a **Pagination** function. The default pagination is 50 entries per page and can be changed to 100, 500, 1000 or 2000. Up to five pages are displayed in the page toggle bar, you can move forward or backward by clicking on the page number, the forward / backward icons or the first page / last page icon. The active page is highlighted in blue.



6.2.2 Resend messages

Select the Messages you want to re-send by clicking on the checkbox ☐ on the left hand side of the Message table. The number of selected Messages is displayed next to the resend  icon. When you click on the re-send  icon, the process of re-sending the selected Messages is started and a progress window opens. During the process you can not use other functions of PONTON X/P GUI. You can stop the process at any time, but it will not affect Messages which have already been re-sent. The progress window displays the number of total Messages to be processed, already processed Messages and number of errors occurred. You can see details (Data ID and Message ID) of the errors by clicking on the > icon. When the process is finished (or you stopped it), you can click on the "[Close window](#)" button and continue using PONTON X/P GUI.



6.2.3 Delete messages

Select the Messages you want to delete from the database by clicking on the checkbox ☐ on the left hand side of the Message table. The number of selected Messages is displayed next to the delete  icon. When you click on the delete  icon a confirm dialog opens. Clicking on the "[OK](#)" button is starting the process of deleting the selected Messages and a progress window opens. During the process you can not use other functions of PONTON X/P GUI. You can stop the process at any time, but it will not affect Messages which have been already deleted. The progress window displays the number of total Messages to be processed, already processed Messages and number of errors occurred. You can see details (Data ID and Message ID) of errors by clicking on the > icon. When the process is finished (or you stopped it), you can click on the "[Close window](#)" button and continue using PONTON X/P GUI.



6.2.4 Delete messages from queue

Select the Messages with status "IN TRANSIT" you want to delete from the message queue by clicking on the checkbox ☐ on the left hand side of the Message table. The number of selected Messages is displayed next to the delete  icon. When you click on the delete from queue  icon a confirm dialog opens. Clicking on the "[OK](#)" button is starting the process of deleting the selected Messages and a progress window opens. During the process you can not use other functions of PONTON X/P GUI. You can stop the process at any time, but it will not affect Messages which have been already deleted. The progress window displays the number of total Messages to be processed, already processed Messages and number of errors occurred. You can see details (Data ID and Message ID) of errors by clicking on the > icon. When the process is finished (or you stopped it), you can click on the "[Close window](#)" button and continue using PONTON X/P GUI.



6.2.5 Send messages to new adapter

Select the Messages you want to send to a new Adapter by clicking on the checkbox ☐ on the left hand side of the Message table. The number of selected messages is displayed next to the send to new adapter  icon. When you click on the send to new adapter  icon a dialog box opens where you can select the Adapter to which you want to send the selected Messages. Select the Adapter and click on the "[Send](#)" button, which is starting the process of sending the selected Messages to a new Adapter and opens a progress window. During the process you can not use other functions of PONTON X/P GUI. You can stop the process at any time, but it will not affect Messages which have been already sent to a new Adapter. The progress window displays the number of total Messages to be processed, already processed Messages and number of errors occurred. You can see details (Data ID and Message ID) of errors by clicking on the > icon. When the process is finished (or you stopped it) you can click on the "[Close window](#)" button and continue using PONTON X/P GUI.


6.2.6 Resend all messages with bulk resend



This function will resend either all inbound or outbound failed messages. You need enter a valid date in the "Date from" search field and select "FAILED" in the Outbound or Inbound selection of the filter bar before the icon becomes active. Selecting certain messages in the Message Monitor will not activate the button. When you have entered the above mentioned valid filter settings the number of failed Messages is displayed next to the bulk resend  icon and the icon becomes active. When you click on the active bulk re-send  icon a confirmation window will appear. When you click on "Yes" the dialog closes and the re-sending process is starting. You can only start one bulk re-sending process at a time. Should you nevertheless try to start a new re-sending process when a process is already in progress you will get an error dialog: "Request denied. There is already a re-transmission process in progress."



6.2.7 Toggle between failed and resolved status of messages

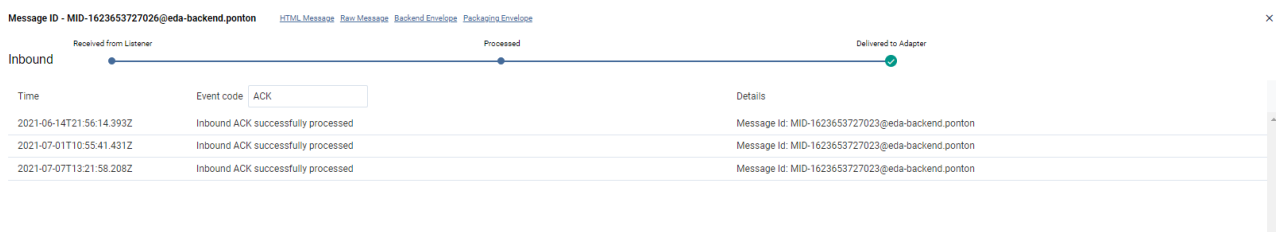Select the FAILED (or resolved) Messages you want to change status by clicking on the checkbox ☐ on the left hand side of the Message table. The number of selected Messages is displayed next to the "Toggle Message Status" icon . When you click on the "Toggle Message Status" , a confirm dialog opens. Clicking on the "OK" button is starting the process of changing the status of all selected Messages from FAILED to RESOLVED or vice versa.

6.2.8 View details of a message



You can view details of every Message displayed in the Message table. When you hover with your mouse over the Message table, a view  icon will appear for each Message. Click on the view icon  of the Message which details you want to view and a detailed list of events will be shown for the chosen Message in the bottom half of the message screen. You can close the detailed view by clicking on the x symbol in the top right corner of the detailed view window.

The **Message ID** of the selected Message and the current processing step and process/transfer status of the Message is displayed in the graph. If the transfer was successful a green check-mark  symbol is displayed, if something went wrong a red cross symbol  is displayed.

Next to the Message ID you may find one or download links in various formats for the selected Message ID. The following formats might be available:



- **HTML Message** - get the message content in HTML format generated by the messenger
- **Raw Message** - get the original message content
- **Backend Envelope** - get Backend Envelope as a list of key value or as XML depend of involved adapter
- **Packaging Envelope** - get Packaging Envelope as a text or as XML depend of used packaging

When you click on one of the links mentioned above, the Message will be downloaded to a folder in your local directory in the selected format.

In the table below the status graph you can view the following details for the Message ID.

- **Time** - time of the created message event (displayed as local server time)
- **Event code** - description the occurred message event
- **Details** - additional description the occurred message event

6.2.9 Add or change the log info of a message


When you hover with your mouse over the Message table, an "Edit log"  will appear for each Message. Click on the "Edit log" icon  the Message which logs you want to edit and a modal dialog will appear. Enter the log info and click on "Save". Please note that log info dialog is a free text field with max. of 128 characters. If you don't want to save the changes click on "Cancel". The Log info is now displayed in the Message Monitor table.


7 Messenger > Partner

A Partner profile can be seen as representing the communication capability of the respective Partner. A Partner may, for example, support HTTP(S), SMTP, SMIME and FTP(S) as transport protocols. An **Agreement** ([see Agreements](#)) between two Partners restricts the capabilities of two Partners to a choice of options that are supported by both sides. In the case of the transport protocol, the partners might define HTTP as the protocol they want to use.

PONTON X/P distinguishes between **Local** and **Remote** partners – this distinction indicates whether the partner refers to a local partner within your own PONTON X/P system or to a communication partner on an external system. The configuration steps might differ slightly. For example, you can submit a certificate request for a Local Partner, but not for a Remote Partner.

7.1 My Partners

Go to: **MESSENGER**  **Partner > My Partner**

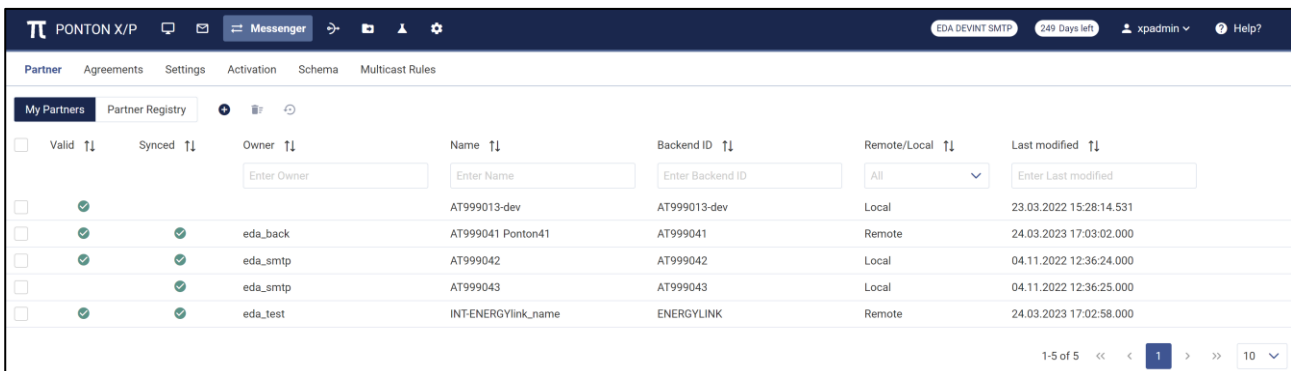

Valid	Synced	Owner	Name	Backend ID	Remote/Local	Last modified
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="text" value="Enter Owner"/>	<input type="text" value="Enter Name"/>	<input type="text" value="Enter Backend ID"/>	<input type="text" value="All"/>	<input type="text" value="Enter Last modified"/>
<input type="checkbox"/>	<input checked="" type="checkbox"/>	eda_back	AT999041 Ponton41	AT999041	Local	23.03.2022 15:28:14.531
<input type="checkbox"/>	<input checked="" type="checkbox"/>	eda_smtp	AT999042	AT999042	Remote	24.03.2023 17:03:02.000
<input type="checkbox"/>	<input checked="" type="checkbox"/>	eda_smtp	AT999043	AT999043	Local	04.11.2022 12:36:24.000
<input type="checkbox"/>	<input checked="" type="checkbox"/>	eda_test	INT-ENERGYlink_name	ENERGYLINK	Local	04.11.2022 12:36:25.000
<input type="checkbox"/>	<input checked="" type="checkbox"/>				Remote	24.03.2023 17:02:58.000

1-5 of 5 << < 1 > >> 10

The **My Partner** table provides an overview of all partners which have been created manually or imported from the Partner Registry (see below) and are therefore available for setting up an agreement.


The following functions are available to easily find the table entry you are looking for:

- All table heading have a **Sort** function (icon). Sort can be ascending and descending.
- Some table headings have a **Filter** functions. Enter values in the filter text box and the table displays only values which contain the entered filter value. Filters can be combined.


- Underneath the table in the bottom right corner you find a **Pagination** function. The default pagination is 10 entries per page and can be changed to 25 or 50. Up to five pages are displayed in the page toggle bar, you can move forward or backward by clicking on the page number, the forward / backward icons or the first page / last page icon. The active page is highlighted in blue.


7.1.1 Create a local partner

A Local Partner could be for example a department within your organization.

Select **MESSENGER** on the navigation and you land on the **Partner** page. Click on the "Create a new partner"  icon, which opens the "Create New Partner" dialog box.

7.1.1.1 Enter New Backend ID



Enter a "**New Backend ID**" in the text box. The "Local" radio button for creating a Local Partner is selected by default. Then click on the "Next Step" button which brings you to the **Configuration** page for the new partner. The Backend ID and type of partner is displayed below the sub-navigation bar. The next step is to specify the configuration details for this new Local Partner. There are different accordion tabs  for the following configuration segments: **Identification**, **Communication**, **Schema Sets**, **Default Packager** and **Contact Information**.

You can only save a new Local Partner configuration when you have filled out all mandatory values marked with an asterisk (*). If you haven't filled out the mandatory fields when you click on the save  icon, an error message in red will be displayed underneath the field with the missing value. Please scroll down and make sure you have checked all fields in case you have received an error message.

7.1.1.2 Enter Identification settings

On the **Identification** segment, you can edit the different IDs used to refer to the given partner (in this case your new Local Partner):

Default IDs: By default, the Partner Display Name, the Backend Partner ID and the Party IDs are all set to the same value when a new Partner is created. In the Identification segment you can modify these settings if required.

- **Partner Display Name** – the Display Name is used within PONTON X/P in menus, selection lists, etc.
- **Backend Partner ID** – this identifier is used internally by PONTON X/P for communication with the backend and the file system. Hence this ID should match the ID in your respective backend system.
- **Party ID** – the Party ID is used for the identification of business partners in the messaging process. Please note that the Party ID at the senders end must match the Party ID at the receivers end. For each Partner, you can configure several party IDs. You can add additional Party IDs if required by clicking on the  icon. You must also select a Party-ID-Type for the new Party ID. It is possible to delete Party IDs by clicking on the delete  icon. Please note that at least one Party ID is required. When you send a message to a partner, all the party IDs you have defined for your own partner entry ('self') will be included in the Message. The receiver can then identify you as the sender if one of these party IDs matches a partner party ID in the receiver's partner configuration.

Party ID



Party IDs are used to identify partners externally. To avoid name clashes and duplication, well-known naming Schemas exist to identify partners, e.g., DUNS codes, VAT numbers, IANA codes etc. For this reason, trading partners should agree on a minimal set of identification types (like DUNS numbers and IANA codes) that is to be used by all partners.

- **Party-ID-Types:** Select a Party-ID-Type from the list in the drop-down menu. Each party ID has a specific party ID type. Please note that you can configure only one party ID per type.
- **EbXml:** Enable EbXml20 if you want to use this party ID with EbXml20.
- **AS4:** Enable AS4 if you want to use this party ID with AS4.

7.1.1.3 Enter Communication settings

The communication settings specify the URIs of Partner's Messenger Service for the supported communication protocols. Enter the address to be used to access the partner's Messenger via the given protocol, for example: <https://partner.server:8080/pontonxp/SoapListener>. It is possible to use several URIs per protocol. This allows you for example to set up different Listeners for one partner by varying the address like <http://partner.server:8080/pontonxp/AS2Listener>. In case the partner can be reached at multiple URIs it is possible to define a fallback URI. If the Ping-All feature is activated, the Messenger switches to the defined fallback URI in the agreement if the partner is unreachable via the primary URI.


In the **Communication** tab, enter the communication settings for your new Partner configuration. Please specify the access details for the communication protocols you want to support: HTTP(S), SMTP, SMIME and FTP(S).

- **URI of Messenger Service** – when defining the URI for HTTP(S) or FTP(S), please be sure to include the port. For example: <http://your.server.com:8080/pontonxp/SoapListener>
- **Preferred/Fallback:** By default the initial URI is marked as preferred. You can select additional URIs by clicking on the  plus icon and define which URI is the preferred URI or a fallback URI. It is only possible to select one preferred URI. It is possible to delete URIs by clicking on the delete  icon.
- **Parallel Deliveries:** Defines the maximum number of parallel transfers started to the given URI

7.1.1.4 Activate Schema Sets

The Schema Sets section allows you to specify which schema sets are "allowed" for message exchanges with this Local Partner. The actual set of Schemas to be used can be specified individually in each **Partner Agreement**. In the Schema Sets table you will see a list of the Schema Sets installed on your Messenger system. Each entry in the list comprises the following elements:

- A checkbox for activating/deactivating the given Schema Set.
- The name of the Schema Set.
- An unfold/fold icon to hide/view the document types for each Schema Set
- A numerical entry indicating the number of selected/defined document types in the Schema Set – for example, 8/10 means that there are 10 document types included in the schema set and 8 of them are currently activated.

You can select all Schema Sets by selecting the checkbox ☐ in the Header row, or all document types of a particular Schema Set by selecting the checkbox ☐ next to the Schemaset. You can also select individually document types contained in a Schema Set. Expand the Schema Set by clicking on the accordion tab  and select the document types by selecting the checkbox ☐. The number of selected document types and

available document types in the Schema Set is highlighted in a yellow badge next to the name of the Schema Set.

7.1.1.5 Select Default Packager

You must select a default packager from the drop-down menu.



7.1.1.6 Enter Contact Information

We recommend to enter the contact details of your main contact person so that your business partner can contact if required.



- **Contact Name**
- **E-Mail**
- **Phone number**

7.1.2 Create a remote partner

A **remote** partner – refers to your business partners, for example: customers, suppliers, carriers, warehouse operators, etc.

Select **MESSENGER** on the navigation and you land on the **Partner** page. Click on the "Create a new partner" icon  which opens the "Create New Partner" dialog box. Click on the save  icon after you have filled out the required and optional fields below:

7.1.2.1 Enter New Backend ID

Enter a "**New Backend ID**" for your new remote partner in the text box and select the "Remote" radio button. Then click on the "Next Step" button, which opens the **Configuration** page for the new partner. The Backend ID and type of partner is displayed below the sub-navigation bar. The next step is to specify the configuration details for this new Remote Partner. There are different accordion tabs  for the following configuration segments: **Identification**, **Communication**, **Schema Sets**, **Default Packager** and **Contact Information**. You can only save a new Remote Partner configuration when you have filled out all mandatory values marked with an asterisk*. If you haven't filled out the mandatory fields when you click on the save  icon, you will receive an error message in red will be displayed underneath the field with the missing value. Please scroll down and make sure you have checked all fields in case you have received an error message.

7.1.2.2 Update partner automatically

If the **Automatic updates** option is activated, the profile for the Remote Partner will be downloaded from the registry automatically whenever it changes, while you can not change this Partner manually. This is only the case, however, if the global setting to **Enable automatic updates** has been activated in the profile registry configuration.

7.1.2.3 Update agreements automatically

If the **Automatic Agreement updates** option is activated all the existing agreements with this remote partner will automatically be recreated as soon as the profile of this remote partner has been downloaded from the registry.

7.1.2.4 Enter Identification settings

On the **Identification** tab, you can edit the different IDs used to refer to the given partner (in this case your new Remote Partner):

Default IDs: By default, the Partner Display Name, the Backend Partner ID and the Party IDs are all set to the same value when a new partner is created. In the Identification tab you can modify these settings if required.

- **Partner Display Name** – the Display Name is used within PONTON X/P in menus, selection lists, etc.
- **Backend Partner ID** – the Backend Partner ID is used for communication with the backend (ERP) system.
- **Party ID** – the Party ID is used for the identification of business partners in the messaging process. Please note that the Party ID at the senders end must match the Party ID at the receivers end. For each Partner, you can configure several party IDs. You can add additional Party IDs if required by clicking on the **+** icon. You must also select a Party-ID-Type for the new Party ID. It is possible to delete Party IDs by clicking on the delete **■** icon. Please note that at least one Party ID is required. When you send an XML message to a partner, all the party IDs you have defined for your own partner entry ('self') will be included in the Message. The receiver can then identify you as the sender if one of these party IDs matches a partner party ID in the receiver's partner configuration.

Identical Party IDs

Please ensure that identical Party IDs are used in the sender's as well as receiver's messenger configuration – otherwise there will be errors when you attempt to exchange messages with your partners. Other Party ID types can also be used, for example EIC, Duns Number, GLN (Global Location Number) or URI. For a single partner you can create multiple Party IDs by using different Party ID types.



- **Party-ID-Types:** Select a Party-ID-Type from the list in the drop-down menu. Each party ID has a specific party ID type. Please note that you can configure only one party ID per type.
- **EbXml:** Enable EbXml20 if you want to use this party ID with EbXml20.
- **AS4:** Enable AS4 if you want to use this party ID with AS4.

7.1.2.5 Enter Communication settings

The communication settings specify the URIs of Partner's Messenger Service for the supported communication protocols. Choose a protocol and enter the address to be used to access the partner's Messenger via the given protocol, for example: `https://partner.server:8080/pontonxp/SoapListener`. It is possible to use several URIs per protocol. This allows you for example to set up different Listeners for one partner by varying the address like `https://partner.server:8080/pontonxp/AS2Listener`. In case the partner can be reached at multiple URIs it is possible to define a fallback URI. If the Ping-All feature is activated, the messenger switches to the defined fallback URI in the agreement if the partner is unreachable via the primary URI.

In the **Communication** tab, enter the communication settings for your new Partner configuration. Please specify the access details for the communication protocols you want to support: HTTP(S), SMTP, SMIME and FTP(S).


- **URI of Messenger Service** – when defining the URI for HTTP(S) or FTP(S), please be sure to include the port. For example: `http://your.server.com:8080/pontonxp/SoapListener`

- **Preferred/Fallback:** By default the initial URI is marked as preferred. You can select additional URIs by clicking on the  plus icon and define which URI is the preferred URI or a fallback URI. It is only possible to select one preferred URI. It is possible to delete URIs by clicking on the delete  icon.
- **Parallel Deliveries:** Defines the maximum number of parallel transfers started to the given URI

7.1.2.6 Activate Schema Sets

The Schema Sets section allows you to specify which schema sets are "allowed" for message exchanges with this Remote Partner. The actual set of Schemas to be used can be specified individually in each **Partner Agreement**. In the Schema Sets table you will see a list of the Schema Sets installed on your Messenger system. Each entry in the list comprises the following elements:

- A checkbox for activating/deactivating the given Schema Set.
- The name of the Schema Set.
- An unfold/fold icon to hide/view the Schema Set Type for each Schema Set
- A numerical entry indicating the number of selected/defined document types in the Schema Set – for example, 8/10 means that there are 10 document types included in the schema set and 8 of them are currently activated.

You can select all Schema Sets by selecting the checkbox ☐ in the Header row, or all document types of a particular Schema Set by selecting the checkbox ☐ next to the Schemaset. You can also select individually document types contained in a Schema Set. Expand the Schema Set by clicking on the accordion tab  and select the document types by selecting the checkbox ☐. The number of selected document types and available document types in the Schema Set is highlighted in a yellow badge next to the name of the Schema Set.

7.1.2.7 Select Default Packager


You must select a default packager from the drop-down menu. The packager specifies how the messages sent by this partner will be packaged for transmission and backend processing. You can choose between different packaging standards, that offer diverse options to specify whether the relevant packaging elements will be used by this partner. EbXML, AS2 and AS4 are most widely used. For details on the specific settings please refer to the descriptions of packaging elements in the [Agreements](#) section.


7.1.2.8 Enter Contact Information

We recommend to enter the contact details of your main contact person so that your business partner can contact if required.




- Contact Name
- E-Mail
- Phone number

7.1.2.9 Add Maintenance Period



You can add one or several maintenance periods by clicking on the  plus icon which opens the input field for "From" (start date/time of the maintenance period) and "To" (end date/time of the maintenance period). Clicking in the input field opens a date picker. Use the date picker to enter dates. The date picker is showing always the current date / time. Change the time first and then click on date you want to select. As soon as you click on the date the date picker will close and the selected date is displayed in the input field.

Please ensure you have selected dates in the future and that the end date is after the start date. It is possible to delete a Maintenance Period by clicking on the delete  icon.

7.1.3 Delete partner(s)

Go to My Partners and select one or several partner by clicking on the checkbox on the left hand side in the table row. The number of selected partners is displayed next to the delete icon . Click on the delete icon  and confirm that you want to delete the partner. Alternatively you can delete a single partner which you have selected for editing by clicking on the delete icon .

7.1.4 Synchronize partner profile with the registry

Go to My Partners and select one or several partner with the checkbox on the left hand side in the table row. The number of selected partners is displayed next to the synchronise  icon. Click on the synchronize icon to start the synchronisation process. A synchronised partner will be marked with a green check  symbol.

Partner Profile Status:

- Valid: if no installed certificate is expired
- Synced: if the partner profile is available in the partner registry and has the same modification timestamp

Please note that the Messenger has to establish a connection with the registry in order to compare the current partner configuration with the profile stored in the registry.

7.2 Partner Registry

Go to: **MESSANGER**  **Partner > Partner Registry**

If you and your communication partners use the Partners Registry then exchanging Partner profiles is very simple. You find a list of all Partner when clicking on the "Partner Registry" tab in the **Messenger > Partner** section.

PI

PONTON X/P

Messenger

EDA DEVINT SMTP

249 Days left

xpadmin

Help?

Partner

Agreements

Settings

Activation

Schema

Multicast Rules

My Partners

Partner Registry

<input type="checkbox"/>	Synced	Owner	Name	Backend ID	File path	Last modified
		<input type="text" value="Enter Owner"/>	<input type="text" value="Enter Name"/>	<input type="text" value="Enter Backend ID"/>	<input type="text" value="Enter File path"/>	<input type="text" value="Enter Last modified"/>
<input type="checkbox"/>		QA	roman	roman	QA/17764633f8c1435384590fd985dc9.xml	26.10.2022 12:40:10.000
<input type="checkbox"/>		QA	testPartyId1		QA/1a98c8d4d1fe4c67bc75a77e979ad6.xml	14.03.2023 09:59:37.000
<input type="checkbox"/>		QA	testPartyId2		QA/1b61da42b3204f0984c1cc1e7dda98.xml	14.03.2023 09:59:46.000
<input type="checkbox"/>		QA	certificate		QA/4aded282f91545cc88dd8137d7555b.xml	31.03.2022 11:45:31.000
<input type="checkbox"/>		QA	test		QA/9427695c57624d17aefd73df5f9a25.xml	20.10.2022 09:56:17.000
<input type="checkbox"/>		QA	Another_local		QA/another_local.xml	23.02.2017 17:02:25.000
<input type="checkbox"/>		QA	KaisPontonTest(AT801234)	AT801234	QA/at801234.xml	04.11.2015 17:28:41.000
<input type="checkbox"/>		QA	KaisPontonWinTest(AT806789)	AT806789	QA/at806789.xml	13.09.2016 07:59:42.000
<input type="checkbox"/>		QA	AT999016	AT999016	QA/at999016.xml	12.09.2013 15:43:16.000
<input type="checkbox"/>		QA	AT999017	AT999017	QA/at999017.xml	12.09.2013 15:43:30.000

1-10 of 934

<<

<

1

2

3

4

5

>


>>

10

The following functions are available to easily find the table entry you are looking for:

- All table heading have a **Sort** function (icon). Sort can be ascending and descending.
- Some table headings have a **Filter** functions. Enter values in the filter text box and the table displays only values which contain the entered filter value. Filters can be combined.
- Underneath the table in the bottom right corner you find a **Pagination** function. The default pagination is 10 entries per page and can be changed to 25 or 50. Up to five pages are displayed in the page toggle bar, you can move forward or backward by clicking on the page number, the forward / backward icons or the first page / last page icon. The active page is highlighted in blue.

7.2.1 Import partner profiles

To import one or more available profiles select one or several partner with the checkbox on the left hand side in the table row. The number of selected partners is displayed next to the import  icon. Click on the import icon to start the import process which automatically imports all available profiles from the registry into your local messenger. Profiles which have been modified since the last import are missing the Synced symbol in the Partner Registry table. Go to My Partner and click on synchronise in order to automatically download the modified partner profiles into the messenger.



Synchronised partners will be marked with a green check  symbol.

Profile collision

Profiles which may collide with already existing profiles within your Messenger will not be imported.

7.3 Individual Partner configuration

7.3.1 Edit a Partner

Select a Partner (local or remote) by clicking on the edit  icon which will appear on the right hand side of the table row when you hover with your mouse over the Partner you want to edit. When you click on the edit icon the Partner configuration page opens. You can also right click the edit icon with the mouse and open the Partner configuration page in a new tab or new window. You can go back to the **My Partner** page by clicking on the "**Back to Partner**" button or leave the partner area by clicking on the navigation or sub-navigation bar. In case you have made changes to the partner, you will be asked to confirm that you want to leave the configuration page. You can change any of the fields on the configuration page, however you must enter valid values in the mandatory fields marked with an asterisk*. Click on the save  icon after entering or editing the configuration.

7.3.1.1 Disable a partner

This option allows you to disable a specific partner within your Messenger configuration, without deleting the partner configuration. In this case the Messenger will reject any message received from this Partner.

Select the "Partner disabled" checkbox and click on the save  icon.


7.3.1.2 Re-enable a partner

Un-Select the "Partner disabled" checkbox and click on the save  icon.

7.4 Certificates

PONTON X/P supports X.509 certificates in binary (DER) as well as text format (PEM).


7.4.1 Partner Certificates

In order to request, install, export, delete or make changes to the Partner Certificates settings you need select a specific Partner (local or remote) by clicking on the edit icon  which will appear on the right hand side of the **My Partner** table row when you hover with your mouse over the partner in the list. After clicking on the edit symbol the Partner configuration page opens. Click on the **Certificates** tab next to the Configuration tab to access the Certificates section.


7.4.1.1 Request a new partner certificate

Remote partner certificates

In the case of **Remote Partners** you would receive the certificate from the partner directly or by downloading the partner's profile from the registry.

Requesting a Partner Certificate is only required for Local Partners. Click on the request new certificate icon  which opens the request certificate dialog box. Fill in the certificate request form. The mandatory fields are marked with an asterisk*:


- **Certificate Name; Organisation; E-mail address**
- **Country (select); Key pair (select)**
- **KeyPair** defines the algorithm, to generate the PrivateKeyPair. For AS4-BDEW **brainpoolP256r1** is required.
- **Private key password**
- **Repeat password**

Optional input fields are: Department; Locality; State or province; Phone number; Fax number. You can also select to build the request with PONTON attributes. When you have filled out all required fields the "[Request certificate button](#)" becomes active. When you click on "[Request certificate button](#)" the requested certificate will appear in a new modal window which enables you to copy the certificates text to a clipboard or download the certificate as a .pem file. Close the window by clicking on the "[OK](#)" button. The requested Certificate will also appear in the Requested Certificates table. You can view the requested certificate by clicking on the view certificate icon  in the Certificate Request column.



Private password key

Please remember the private key password so that you can install the requested certificate later and prove that this certificate is actually yours.

7.4.1.2 Extending a partner certificate

You can also request a new certificates for an existing certificate that is going to expire in the near future. In that case click on the request certificate  icon, which appears on the right hand side of the Partner certificate table row when you hover with your mouse over the Partner certificate for which you want to request a new certificate. On click the "[Request certificate](#)" dialog box opens. The certificate request form is pre-filled with the details of the existing certificate, but can be changed. The mandatory fields are marked with an asterisk. when you have filled out all required fields the "[Request certificate button](#)" becomes active.

7.4.1.3 Install a partner certificate

When you have received a certificate file from a CA or a communication partner, open the "[Install Partner Certificate](#)" Dialog by clicking on the Install Certificate  icon. Either choose a file by clicking on "[Choose files](#)" or drag-and-drop the file into the marked area. The name and size of the file will appear in the dialog box. You can remove the file by clicking on the  symbol. If the file is valid and you have entered the required password (local partner only) can click on the "[Install](#)" button to start the installation process. When the installation was successful the new certificate will disappear in the Partner certificates list.

Local Partner certificate



For **Local Partner** you will need to enter the private key password (i.e. the password you entered when you filled in the certificate request for this particular certificate) to confirm that this certificate is actually yours.

CA certificate



A partner certificate will only be accepted when the certificate of the issuing CA (certificate authority) has been installed. Otherwise the trust relationship between the partner and the CA cannot be traced. The certificate for the PONTON CA is automatically included in the default installation. For other certificate authorities you will need to obtain and install the relevant CA certificate.

7.4.1.4 Export a partner certificate

Exporting a certificate enables you to save and then reuse your own certificate as long as it is valid.


Click on the export  icon, which appears on the right hand side of the Partner certificate table row when you hover with your mouse over the Partner certificate you want to export. When you click on the export  icon, the "[Export Certificate](#)" dialog will appear. Select either Base64 PEM or Binary DER as format for the exchange of your partner certificate with remote communication partners. If you want to use the Partner certificate for other Local Partners in the same or a different Messenger you need to export the certificate with a private key password. Select that option and enter the private key password. Clicking on the "[Export](#)" button will download the Partner Certificate to your local folder. You can share your certificate with your business partners by sending the certificate file to them via e-mail and having them install it into their partner configurations.

7.4.1.5 Delete a partner certificate

Click on the delete  icon, which appears on the right hand side of the Partner certificate table row when you hover with your mouse over the Partner certificate you want to delete. When you click on the delete  icon a confirmation dialog opens, Clicking on the "[Yes](#)" button will delete the Partner certificate.

7.4.1.6 Define default Certificates

You can install multiple Certificates for Partners. This enables you to use different certificates for functions like signing and encryption or for different partners. It is also possible to define certificates for different packagers such as AS1, AS2, EbXml etc. In that case the Agreements subsequently created for this Partner will automatically use the packager certificates as defined in Partner certificates. Move the slider next to

the listed packager (EbXml, AS4, AS3, AS2, AS1 or Processing) to the right so that the radio-button in the respective column become active. Click on the radio-button so that the circle is filled in blue and click on the save  icon. You can also select which installed certificate you want to use as default certificate by clicking on the radio-button under the Default heading. Only one certificate can be used as default certificate.

Default Certificate


If 'default' certificate is chosen in the packager, the certificate used by the packager will automatically be updated as soon as another certificate is defined as the 'default' partner certificate.

Click on the save  icon after you have made changes to the Partner certificate settings.



Default certificate

All certificates that you install for one Partner will become default certificate in the order of their valid-from date. Alternatively, you can manually select the default certificate and the certificate that should be default when this certificate expires.



7.4.2 CA Certificates

In order to install, export or delete CA certificates you need select a specific Partner (local or remote) by clicking on the edit icon  which will appear on the right hand side of the **My Partner** table row when you hover with your mouse over the partner in the list. After clicking on the edit symbol the Partner configuration page opens. Click on the **Certificates** tab next to the Configuration tab to access the Certificates section.



7.4.2.1 Install a CA certificate

After requesting for a new certificate, you shall receive a valid certificate file via e-mail from the PONTON CA. Open the "[Install Partner CA Certificate](#)" dialog by clicking on the Install CA Certificate icon . Either choose a file by clicking on "[Choose files](#)" or drag-and-drop the file into the marked area. The name and size of the file will appear in the dialog box. You can remove the file by clicking on the  symbol. When the file is valid you can click on the "[Install](#)" button to start the installation process. If the installation was successful, the new CA Certificate will disappear in the CA Certificates list.

7.4.2.2 Export a CA certificate

Click on the export  icon, which appears on the right hand side of the CA Certificate table row when you hover with your mouse over the CA Certificate you want to export. When you click on the export  icon, the "[Export CA certificate](#)" dialog will appear. Select either Base64 PEM or Binary DER as format. Clicking on the "[Export](#)" button will download the CA Certificate to your local folder.

7.4.2.3 Delete a CA certificate


Click on the delete  icon which appears on the right hand side of the CA certificate table row when you hover with your mouse over the CA Certificate you want to delete. When you click on the delete  icon a confirmation dialog opens, Clicking on the "[Yes](#)" button will delete the CA Certificate.

8 Messenger >Agreements



Go to: **MESSENGER** ↔ > **Agreements**

The purpose of Partner Agreements is to specify the communication and data processing settings to be used when Messages are exchanged between two specific Partners. Each Agreement applies to a given combination of a Own and a Communication Partners.

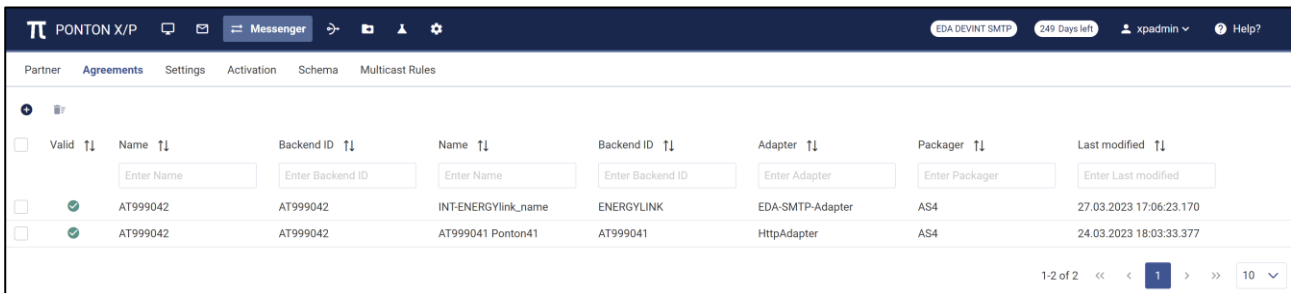8.1 View Agreements list



Valid	Name	Backend ID	Name	Backend ID	Adapter	Packager	Last modified
<input checked="" type="checkbox"/>	AT999042	AT999042	INT-ENERGYlink_name	ENERGYLINK	EDA-SMTP-Adapter	AS4	27.03.2023 17:06:23.170
<input checked="" type="checkbox"/>	AT999042	AT999042	AT999041 Ponton41	AT999041	HttpAdapter	AS4	24.03.2023 18:03:33.377

The **Agreements** table provides an overview of all Agreements which have been created in the Messenger. If the agreement is valid the symbol  is shown. In case the agreement is not valid, the symbol  is shown.


An agreement is invalid if:

- no message type is activated
- at least one activated message type is not accepted by sender or receiver
- no communication URL is defined for the receiver
- no party-id is defined for sender or receiver
- message signing is enabled but the sender has no valid certificate installed
- message encryption is enabled but the receiver has no valid certificate installed

The following functions are available to easily find the table entry you are looking for:

- All table headings have a **Sort** function (icon). Sort can be ascending and descending.
- Some table headings have a **Filter** functions. Enter values in the filter text box and the table displays only values which contain the entered filter value. Filters can be combined.
- Underneath the table in the bottom right corner you find a **Pagination** function. The default pagination is 10 entries per page and can be changed to 25 or 50. Up to five pages are displayed in the page toggle bar, you can move forward or backward by clicking on the page number, the forward / backward icons or the first page / last page icon. The active page is highlighted in blue.

8.2 Create a new Agreement


Go to **MESSENGER** ↔ on the navigation and select **Agreements** in the sub-navigation bar. Click on the "Add Agreement"  icon, which opens the "New Agreement" dialog box. Select with the drop-down menu your Own Partner (Partner 1) and the intended Communication Partner (Partner 2) for the new Agreement. Then select an Agreement template from the drop-down menu. The Agreement templates differ with regards to the default options for **processing** and **packager settings**. You can not change the template for

already created Agreements. If you want to change the template of an existing Agreement you need to delete the Agreement and create a new one.

Available default templates are:

- **EbXml20**
- **AS1**
- **AS2**
- **AS3**
- **AS4-ENTSOG**
- **Plain**

Then click on the "Next Step" button which opens the Agreement configuration page. The next step is to specify the configuration details for this new Agreement. There are different accordion tabs > for the following configuration segments: **Processing, Packager, Schema Set, Integration** and **Communication**.

Click on the save  icon after you have checked fields below.

Agreements between two local partners

Before you can create an Agreement between two Own Partners "Allow loopback" in **Messenger** → **Settings** → **General Settings** → **Communication** must be enabled.

While preparing the messages for outbound communication the Agreement settings are applied sequentially in the following order - **Processing, Packaging and then Communication**. In case of incoming messages the agreement settings are applied in the order - **Packaging, Processing and then Integration**.

8.2.1 Enter Processing settings

The available processing settings for the **Agreement Template** (EbXml20, AS2, AS3, AS4-ENTSOG, Plain) are identical, with the exception that additional options are pre-selected for EbXML. The processing settings are applied to the payload and allow to sign and/or (de-) en-encrypt the message content (payload).

XML Modifications are optional settings if special treatment is required for xml files received from / delivered to the backend. XML Modification enables change in encoding and the line ending of a document before sending or after receiving it, so that it is adapted to the requirements of the receiver or of an interior adapter. Additionally, there are options to change some XML elements in the payload that are especially helpful to guarantee the compatibility with older papiNet standards (version 1.0 and 1.1).

- **Modify sending XML payload:**
 - **Update papiNet 1.x Envelope for sending payload:** PapiNet 1.x documents have envelope information in the payload. If this option is enabled the protocol, the message ID, the time stamp, the sender and the receiver will be set to right values.
 - **Change Character Encoding:** The document can be converted to UTF-8 and UTF-16, several ISO encodings and some encodings for Japanese text.
 - **Change Line Ending:** The line endings in the document can be changed to the LF, CR or CR LF.
 - **Change DTD doctype:** A DTD (document typ definition) can be added or removed

- **Pretty Print:** XML documents are reformatted to increase human readability. It has no effect on the XML structure itself, however it can help badly implemented xml parsers to process the document.
- **Modify received XML payload:**
 - **Update papiNet 1.x Envelope for received payload:** PapiNet 1.x documents have envelope information in the payload. If this option is enabled the protocol, the message ID, the time stamp, the sender and the receiver will be set to right values.
 - **Change Character Encoding:** The document can be converted to UTF-8 and UTF-16, several ISO encodings and some encodings for Japanese text.
 - **Change Line Ending:** The line endings in the document can be changed to the LF, CR or CR LF.
 - **Change DTD doctype:** A DTD (document typ definition) can be added or removed
 - **Pretty Print:** XML documents are reformatted to increase human readability. It has no effect on the XML structure itself, however it can help badly implemented xml parsers to process the document.
- **Sign payload:** If enabled the message will be signed. If activated you have to select the needed signature algorithm. You can select one specific certificate for signing in case you have installed multiple certificates for your Own Partner and want to use a non default certificate.
- **Include signing cert:** If enabled the used certificate is sent with the message.
- **Process signed payload:** Enable if you expect signed payloads.
- **Compress payload:** Specifies whether compression is to be used.
- **Process compressed payload:** Enable if you expect compressed payloads.
- **Encrypt payload:** If enabled the message will be encrypted. You can select one specific certificate for encryption in case you want to use a non default certificate of your Communication Partner.
- **Process encrypted payload:** Enable if you expect encrypted payloads.
- **Validate sending payload:** Enables XML validation for outgoing messages.
- **Validate received payload:** Enables XML validation for incoming messages.
- **Create Energylink XML format:** This creates an XML signature and applies XML encryption as specified by the Austrian Energylink. Only "EDA Wechselprozess" messages are affected.
- **Process Energylink XML format:** This validates XML signatures and decrypts XML encrypted content as specified by the Austrian Energylink. Only "EDA Wechselprozess" messages are affected.
- **Custom validation of sending payload:** Enables an extra payload validation step when sending payloads. A validation plugin has to be provided for this.
- **Custom validation of received payload:** Enables an extra payload validation step when receiving payloads. A validation plugin has to be provided for this.

8.2.2 Enter Packager settings

The packager settings define the messaging standard to be applied. It allows you to apply globally defined standards to communicate with external parties. The PONTON X/P Messenger supports ebXML 2.0, AS1, AS2, AS3 and AS4. Furthermore the Messenger also allows exchange of plain messages. The available packaging settings depend on the **Agreement Template** you have selected.

8.2.2.1 EbXML settings (EbXML template)

The following options are available to make messaging more compatible between individual parties, since different parties might only accept / send Messages which fulfill certain criteria. Mandatory fields are marked with an asterisk (*).

- **Role (from) / (to):** EbXML allows you to define a role for sender and receiver (e.g. 'buyer' and 'seller'). This has no effect for PONTON X/P, but other messaging software might require specific values.

- **Service*/Service Type:** The EbXML Service / EbXML ServiceType settings can be used to specify the EbXML service that handles the Message.
- **Action*:** This setting identifies a process within the specified EbXML Service.
- **CPA ID*:** The CPA ID specifies the parameters governing the exchange of messages between the parties.
- **Request Acknowledgements/Request signed acknowledgements:** Enable this option if you expect (signed) acknowledgements for sent messages.
- **Request Duplicate elimination:** If duplicate elimination is enabled, the receiver must eliminate duplicate messages.
- **Request synchronous reply** – If you use a synchronous protocol, a reply can be received through the same connection.
- **Attachment role** – EbXML allows you to define roles for the different attachment types. PONTON X/P uses these roles to identify attachments in case of multiple attachments.

The following variables can be used in the options **Role To , Role From, Service, Service Type, Action, CPA ID:** %MESSAGEID%, %TESTFLAG%, %MESSAGEVERSION%, %SCHEMASET%, %SENDERID%, %SENDER_DISPLAYNAME%, %RECEIVERID%, %RECEIVER_DISPLAYNAME%, %MESSAGEID%, %CONVERSATIONID%

8.2.2.2 AS1 settings (AS1 template)

AS1 is available for SMTP communication and the following settings are available for this standard:

- **Request acknowledgements:** You can request an MDN (Message Disposition Notification) for all outbound messages from your communication partner.
- **Request signed acknowledgements:** If you want the MDN to be signed, you have to activate this option. The MIC hash algorithm has to be selected from the list.
- **Expect Signed Acknowledgements:** Enable this option if you expect signed acknowledgements.
- **Sign messages:** If enabled the messages will be signed.
- **Expect signed messages:** Enable if you expect signed payloads.
- **Sign acknowledgements:** If enabled the acknowledgements will be signed.
- **Compress messages:** Specifies whether compression is to be used.
- **Expect compressed messages:** Enable if you expect compressed messages.
- **Encrypt messages:** If enabled the messages will be encrypted.
- **Expect encrypted messages:** Enable if you expect encrypted messages.
- **Mail subject:** This field defines the subject for all outgoing mails.
- **Use mail-client email format when sending mail with body content:** The Messenger creates a body part with a static text for all outgoing messages.
- **Accept mail-client email format:** If this option is activated the Messenger tries to process eMails that are not AS1-compliant (for example eMails created by eMail clients like MS Outlook).
- **Ignore duplicate messages:** If ignore duplicate elimination is set, the Messenger will ignore messages with previously received message-IDs.

8.2.2.3 AS2 settings (AS2 template)

AS2 is available for communication by HTTP(S) and the following settings are available for this standard:

- **Request acknowledgements:** You can request an MDN (Message Disposition Notification) for all outbound messages from your communication partner.
- **Request signed acknowledgements:** If you want the MDN to be signed, you have to activate this option. The MIC hash algorithm has to be selected from the list.
- **Asynchronous response URL:** If this option is enabled, then the receiver will send the requested MDNs to the specified URL.
- **Expect Signed Acknowledgements:** Enable this option if you expect signed acknowledgements.
- **Sign messages:** If enabled the messages will be signed.
- **Expect signed messages:** Enable if you expect signed payloads.
- **Sign acknowledgements:** If enabled the acknowledgements will be signed.
- **Compress messages:** Specifies whether compression is to be used.
- **Expect compressed messages:** Enable if you expect compressed messages.
- **Encrypt messages:** If enabled the messages will be encrypted.
- **Ignore duplicate messages:** If ignore duplicate elimination is set, the Messenger will ignore messages with previously received message-IDs.

8.2.2.4 AS3 settings (AS3 template)

AS3 is available for communication by FTP(S) and the following settings are available for this standard:

- **Request acknowledgements:** You can request an MDN (Message Disposition Notification) for all outbound Messages from your communication Partner.
- **Request signed acknowledgements:** If you want the MDN to be signed, you can select the algorithm.
- **Asynchronous response URL:** If this option is enabled, then the receiver will send the requested MDNs to the specified URL.
- **Expect Signed Acknowledgements:** Enable this option if you expect signed acknowledgements.
- **Sign messages:** You can select the algorithm with the drop-down menu to sign the Message with your Partner certificate. You can select one specific certificate for signing in case you have installed multiple certificates for your Local Partner.
- **Expect signed messages:** Enable if you expect signed payloads.
- **Sign acknowledgements:** If enabled the acknowledgements will be signed.
- **Compress messages:** Specifies whether compression is to be used.
- **Expect compressed messages:** Enable if you expect compressed messages.
- **Encrypt messages:** If enabled the messages will be encrypted.
- **Ignore duplicate messages:** If ignore duplicate elimination is set, the Messenger will ignore messages with previously received message-IDs.

8.2.2.5 AS4 settings (AS4-ENTSOG template)

Following settings are possible and can be defined while using the AS4 standard in the messenger, mandatory fields are marked with an asterisk*.

- **Role (from) / (to):** Role identifies the authorized role of the Party sending or receiving the message.

- **Service***: This element identifies the service that acts on the message
- **Service type**: This indicates how the parties sending and receiving the message will interpret the value of the service element. If the type attribute is not set, the content of the Service element **MUST** be a URI.
- **Action***: This string identifies an operation or an activity within the defined Service
- **Agreement reference**: The value of an Agreement reference element identifies the agreement that governs the exchange and must be unique within a namespace mutually agreed by the two parties.
- **Agreement reference type**: This attribute indicates how the parties sending and receiving the Message will interpret the value of the reference. If the type attribute is not present, the content of the AgreementRef element **MUST** be a URI
- **Agreement reference pmode**: This attribute indicates how the message is processed.
- **Send message properties**: If this is enabled, then message related information is added to the AS4 envelope as Type/Value pairs. These values include ProductName, VendorName as well as Version of the messaging tool. You can add individual properties. The value can be fixed or use a variable described below.
- **Send content properties**: If this is enabled, then payload related information is added to the AS4 envelope as Type/Value pairs. You can add individual properties. The value can be fixed or use a variable described below.
- **Support certificate update message**: If a new certificate is installed in a Local Partner profile, all Agreements for this profile will be checked. If the flag is enabled, a certificate update message will be sent. You need at least one certificate for the Local Partner installed. This is the implementation of the ENTSG AS4 Profile ebCore Agreement Update feature, which follows the guidelines of the ebCore Agreement Update Specification.
- **Sign messages**: You can select the algorithm to sign the Message with your own certificate. In the outbound direction you can select one specific certificate for signing in case you have installed multiple certificates for your Local Partner.
- **Expect signed messages**: Enable if you expect signed payload.
- **Compress messages**: You can select to compress the Message before sending.
- **Expect compressed messages**: Enable if you expect compression.
- **Encrypt messages**: You can select the algorithm to encrypt the Message with your Partner's Certificate.
- **Send receipts**: Enable this to send an AS4 receipt message for any received message.
- **Send signed receipts**: sign AS4 receipt messages before sending.
- **Ignore duplicate messages**: If ignore duplicate elimination is set, the Messenger will ignore all received duplicate Messages
- **Send empty conversation ID**: Disables sending of conversation ID.

The following variables can be used in the options **Role To** , **Role From**, **Service**, **Service Type**, **Action**, **AgreementRef**, **AgreementRefType**, **Message Property Value** and **Content Property Value**: %MESSAGE TYPE%, %TESTFLAG%, %MESSAGEVERSION%, %SCHEMASET%, %SENDERID%, %SENDER_DISPLAYNAME%, %RECEIVERID%, %RECEIVER_DISPLAYNAME%, %MESSAGEID%, %CONVERSATIONID%

Since version 4.4.0 it is possible to use elliptic curve security for encryption of symmetric key and for signature. Therefore four ECDH-ES-ConcatKDF options were added to encryption algorithm selectbox. They differ in the way of filling the ConcatKDF-parameters (empty =>

stay empty / generated => filled with random values) and the hash algorithm to use (SHA256 / SHA512). To sign with elliptic curves you have to select ECDSA as signature algorithm. Both requires, that the private key pair was generated with corresponding type, f.e. **brainpoolP256r1**.

8.2.2.6 Plain settings (Plain template)

Is available for HTTP(S) and FTP(S). Plain packaging allows sending and receiving pure messages without any packaging envelope. This packaging option is intended for the communication with a Partner that does not have a messaging software.

- **Use transport results as acknowledgement:** If enabled transport level results will be converted to Acknowledgement and sent to the specified Adapter.
- **Reception password:** The optional password is used to secure the reception of messages. If no password is defined, any Message that is posted to the PlainListener URL will be accepted.

8.2.3 Configure Schema Set

The Schema Sets section allows you to specify which Schema Sets are to be used for message exchange based on the current Partner Agreement. To access the **Schema Sets go to MESSENER > Schema Sets** sub-navigation tab.

Schema Sets

The Schema Sets available for selection in a given Partner Agreement are dependent on the schema settings in your partner profiles for the two relevant partners. Please keep in mind, however, that this consistency check is local, i.e. it applies to the partner profiles and Agreements in your own Messenger configuration. To ensure successful message exchange with your communication partners you will need to cross check the selected options (as well as your other configuration settings) with your Partners.

8.2.4 Enter Integration details



8.2.4.1 Select Default Adapter

Default Adapter*: the selected adapter will be used for all received messages unless overridden by an adapter rule.

8.2.4.2 Define adapter rules



Click on the "[Define adapter rules](#)" button and enter the values for:

- **XPath*:** Define a XPATH whose value will be compared with the VALUE by OPERATOR. If comparison matches, the adapter that will process the message will be changed. Special XPATH-expressions are available: '!MessageId', '!ConversationId', '!MessageType', '!MessageVersion', '!SchemaSet', '!TestFlag' and '!LogInfo'
- **Operator*:** Select of the following operator from the drop-down menu: EQUAL, NOT_EQUAL, LESS_THAN, GREATER_THAN, CONTAINS, CONTAINS_NOT
- **Value*:** Enter the value for the XPATH.
- **Adapter*:** Enter the Adapter that will process the message when the above condition is meet.

You can add additional **Adapter Rules** by clicking on the  icon. It is possible to delete Adapter Rules by clicking on the delete  icon.

8.2.5 Enter Communication details

The communication settings define the communication URI for message delivery.



- **Reception URI:** This value cannot be changed. It displays the URI that a communication partner needs to send messages to this Messenger instance. The hostname and port depend on the network setup and cannot be detected automatically.
- **Primary URI*:** Primary URI specifies the transport protocol to be used for sending messages based on this agreement. It is mandatory to set one URI.
- **Fallback URI:** In case the partner is reachable at more than one URI, a fallback URI can be defined. The Messenger will use the fallback URI only if the primary URI has been identified as unreachable during previous transmission tries. The fallback channel is only used if the "PingAll" option is enabled in the agreement as well as globally under Messenger → Settings → General Settings → Communication. **PingAll enabled:** By activating this option, the Messenger will periodically verify that the defined communication URIs are usable.
- **Username/password:** Username / Password only needs to be provided if the URI can only be accessed after authentication.
- **Retries*:** Retries determines how often the Messenger will try to send a message until it receives an acknowledgement. It is mandatory to choose a retry value.
- **Retry Interval (seconds):** Retry Interval determines how long the Messenger will try to send a message until it receives an acknowledgement. If less retry intervals than number of Retries are entered, then the last retry interval will be used for the remaining retries. You can add additional Retry Intervals by clicking on the  icon. It is possible to delete Retry Intervals by clicking on the delete  icon.

8.2.5.1 Define communication rules

With communication rules it is possible to override the regular transmission URI based on message specific rules.

Click on the "Define communication rules" button and enter the values for:


- **XPath*:** Define a XPATH whose value will be compared with the VALUE by OPERATOR. If comparison matches, the adapter that will process the message will be changed. Special XPATH-expressions are available: '!MessageId', '!ConversationId', '!MessageType', '!MessageVersion', '!SchemaSet', '!TestFlag' and '!LogInfo'
- **Operator*:** Select of the following operator from the drop-down menu: EQUAL, NOT_EQUAL, LESS_THAN, GREATER_THAN, CONTAINS, CONTAINS_NOT
- **Value*:** Enter the value for the XPATH.
- **URI*:** Communication URI that will be used when the rule is triggered


You can add additional **Communication Rules** by clicking on the  icon. It is possible to delete Communication Rules by clicking on the delete  icon.

8.3 Edit an agreement



Go to **MESSENGER**  **Agreements** and select an agreement by clicking on the edit




icon, which will appear on the right hand side of the table row when you hover with your mouse over the Agreement you want to edit. When you click on the edit  icon the **Agreement Configuration** page opens. You can also right click the edit icon with the mouse and open the Agreement configuration page in a new

tab or window. You can go back to the **Agreement** page by clicking on the "**Back to Agreements**" button or leave the agreement area by clicking on the navigation or sub-navigation bar. In case you have made changes to the agreement, you will be asked to confirm that you want to leave the configuration page. You can change any of the fields on the configuration page, however you must enter valid values in the mandatory fields. Click on the save  icon after entering or editing the configuration.

8.4 Delete agreements

Go to **MESSENGER**  **Agreements** and select one or several Agreements by clicking on the checkbox on the left hand side in the table row. The number of selected Agreements is displayed next to the delete  icon. Click on the delete



icon and confirm that you want to delete the Agreement. Alternatively you can delete a single Agreement which you have selected for editing by clicking on the delete  icon.

8.5 Agreement template customization

When agreements are automatically created, it is useful to adjust the agreements dynamically. For example it is possible to adjust new agreements so that the received messages are routed to an adapter depending in the sender.


In the default installation there is a sample template file called `privateagreement_sample.vm`

This sample can be copied to `privateagreement.vm` to make it active for new agreements.


```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<PrivateCollaborationAgreement>
  <DefaultAdapterId>${agreement.adapterId}</DefaultAdapterId>
  <Rules SenderRefId="${agreement.ownPartner.id}"
ReceiverRefId="${agreement.communicationPartner.id}">
    </Rules>
  <Rules SenderRefId="${agreement.communicationPartner.id}"
ReceiverRefId="${agreement.ownPartner.id}">
    <Rule id="1">
      <Trigger XPath="!MessageType" Operator="Equal" Value="MSCONS"/>
      <Action type="ChangeDestinationAdapter">MSCONS-Adapter</Action>
    </Rule>
  </Rules>
</PrivateCollaborationAgreement>
```

9 Messenger >Settings

Go to: **MESSENGER**  **Settings**

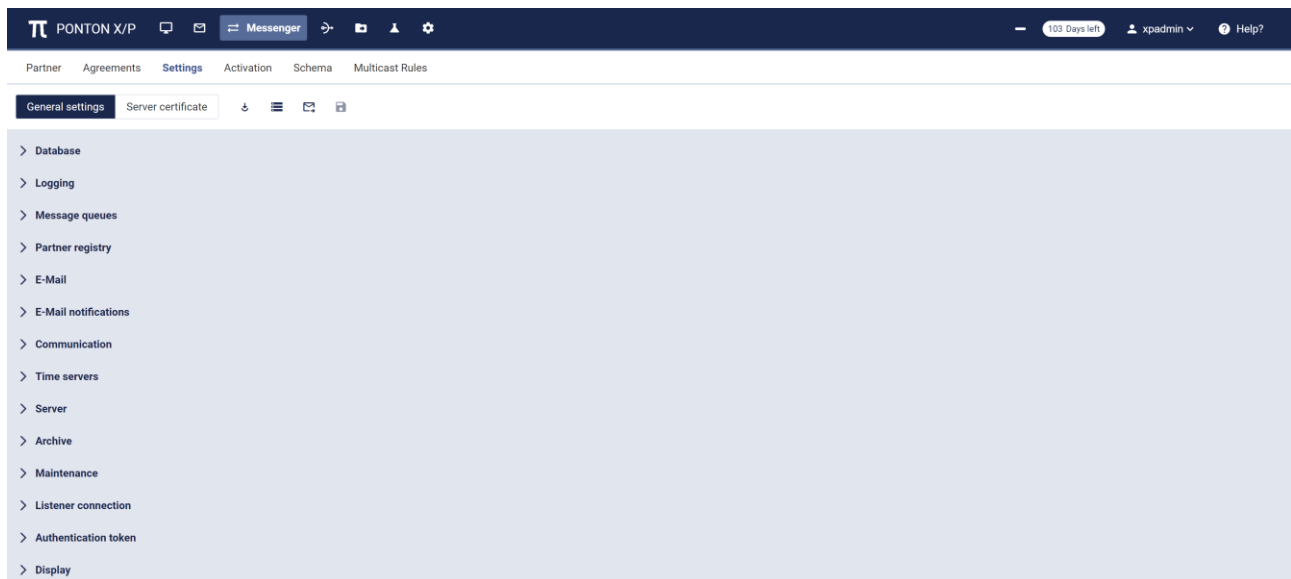

9.1 Test the connection to database

Click on the **Test connection**  icon to establish a connection to your database and test the URL and user/password. You should receive a success toast when the connection was successful.

Use this test whenever changing database configuration details, **BEFORE** saving the configuration.

If it is not possible to connect to your database, your Messenger installation will not work.


9.2 Reconnect to database

Click on the **Reconnect database**  icon to reconnect to the database, using the changed configuration.

Reconnect

Changes in database settings will only be applied when using the **reconnect database** action, or a restart of the Messenger is performed.

9.3 Test sending e-mail

Click on the **Test sending e-mail**  icon to test the e-mail configuration. Enter a receiver e-mail address in the e-mail field and click on the "Send" button. If you want to close the dialog and not send the test e-mail, click on the **x** button.

9.4 General Settings

Click on the save icon  after entering or editing values in any of the sections below.

9.4.1 Enter database settings

The Messenger stores log entries in a database. These information is related to the processing of messages through the Messenger. Content of the files transacted via the Messenger is not stored in the database tables used by the Messenger.

HSQL database

PONTON X/P is installed with a pre-configured HSQL database, which is only intended for **test** purposes. For productive operations a supported database system must be used.

The log database is accessed via JDBC connection. The PONTON X/P distribution includes configuration scripts to manually set up the tables for the database systems mentioned in the **Hardware and System Requirements** document.

To configure the Messenger database please fill in the following values, mandatory fields are marked with an asterisk*:

- **URL***: Enter the URL for the JDBC connection to your database
- **User**: Enter the username for the connection (optional)
- **Password**: Enter the password for the connection (optional)
- **Minimum Connections***: The minimum number of connections to the database. The Messenger will instantly establish this many connections when it is started and keep them open as long as the Messenger is running
- **Maximum Connections***: The maximum number of connections to the database. The Messenger will open connections on demand up to this number
- **Connection Timeout***: Connection Timeout determines after which time idle database connections are terminated

Connection standard

The database URL format depends on the database type. Please consult the relevant driver documentation for details on how to specify the database URL.

Besides this, there are some parameters, which are recommended to use in the JDBC-URL:

DB	JDBC-Parameter	Description
MS-SQL	sendStringParametersAsUnicode=false	Don't send QueryParameterValue as unicode, to use corresponding index properly, which improves request performance. <u>Example:</u> jdbc:sqlserver://localhost:1433;databaseName=xptest;sendStringParametersAsUnicode=false

9.4.2 Define logging level

To specify the logging level please select the following settings, mandatory fields are marked with an asterisk*:

- **Messenger Log Level***: Select the desired level for Messenger logs. There is a range of settings available: For example: OFF -turns logging off completely; TRACE -logs all the messages output by the system.

- **JDBC Log Level***: Select the desired level for database logs. There is a range of settings available: For example: OFF -turns logging off completely; TRACE -logs all the messages output by the system.
- **Log only Errors in Database**: Logging all the message related events in the database reduces the performance but offers a better audit trail. This option allows to decide between maximum performance and maximum audit level.
- **OK Event Age***: The number of days after ok events will be deleted automatically.

Please keep in mind that the chosen logging level can have an effect on the performance of your system. In particular, it is advisable to use DEBUG or TRACE logging only while trying to troubleshoot and analyze errors.

9.4.3 Enter message queue settings

Mandatory fields are marked with an asterisk*:

- **Inbound Queue Scan Interval***: specifies the interval to scan the inbound message queues.
- **Inbound Queue Delivery Timeout***: specifies the maximum time-frame expected for a successful message delivery to an adapter. The time-frame starts when a message is scheduled for delivery and ends when the Adapter acknowledges the correct reception. Whenever this expected time-frame is exceeded a warning message will be logged. In combination with the email notification this can be used to alert an administrator about the issue between Messenger and Adapter.
So if the delivery timeout is specified as 5 minutes, a warning will be created once after 5 minutes.
- **Inbound Queue Retry Delay***: specifies the delay after an unsuccessful message delivery attempt. This is used to reduce load on the receiving Adapter.
- **Inbound Queue Notification Retry***: specifies how many times the failing of the delivery of a message to the adapter should be reported.
- **Outbound Queue Scan Interval***: specifies the interval to scan the outbound message queue.

9.4.4 Enter Partner Registry Settings

The partner registry allows you to exchange profiles with other partners by uploading and downloading Partner configurations to/from a central registry. Here you can configure the connection and authentication to access the Partner Registry:

- **Registry URL**: enter the address where the Partner Registry is to be accessed. Leave it empty to use the default registry server.
- **Username* / Password***: enter the user name and password for access to the registry. These will be provided by the Partner Registry administrator.
- **Automatic agreement updates**: this option allows your Messenger to automatically update the already existing Agreements with a specific remote Partner as soon as the profile of this Remote Partner has been updated in the Messenger from the Partner Registry.
- **Automatic partner creation**: this option allows your Messenger to automatically download profiles when needed. The Messenger will try to find a Partner profile in the Partner Registry based on the **Backend Partner ID** for outbound Messages and based on the default **Party-ID** for inbound Messages. When this option is enabled, also Partner Agreements are created when needed.

Currently the automatic partner creation option only works as intended when the Messenger is used in the Austrian EDA environment.

- **Automatic partner cleanup:** this option allows your Messenger to automatically delete remote profiles, which were deleted on the Partner Registry.
- **Download interval*:** Defines the interval how often profile updates are downloaded from the registry.

When updating the Partner Certificates from the Partner Registry the client certificates on the Listener are also updated automatically.

9.4.5 Enable E-mail

In this section you can enable or disable inbound and outbound e-mail connections in your Messenger configuration. Mandatory fields are marked with an asterisk*:

9.4.5.1 Inbound

You can enable your Messenger to receive e-mail messages by setting up a POP/IMAP connection with the following entries:

- **Protocol*:** set to POP3 / IMAP (depending on the type of mail server)
- **Server*:** the hostname or IP address of your mail server
- **Interval*:** the frequency for accessing the server for mail download
- **Username* / Password*:** must be properly set to authenticate the Messenger on the mail server
- **Inbox Folder*:** the folder on the server where new emails are stored. use "INBOX" to access the default folder.

9.4.5.2 Outbound

This connection is used for e-mail messages sent by your Messenger to your business partners and also for notification emails to administrators. The following data can be configured if enabled, mandatory fields are marked with an asterisk*:

- **From*:** the sender's address to be used for e-mails sent from the Messenger.
- **Protocol*:** select the protocol from the available protocols in the drop-down menu.
- **SMTP:** the outgoing mail server to be contacted by your Messenger in order to submit the e-mail.
- **Username / password:** must be entered if your mail server requires authentication for outgoing e-mails, in this case enter the settings to be used by the Messenger to log in on the mail server.

Email configuration is required before being able to use AS1 packaging successfully.

9.4.6 Enter E-mail Notification settings

E-mail notifications

E-mail notifications require an outbound e-mail connection.

You can use the notification service to send e-mails to specified addresses whenever certain events occur. For example, you might want to notify your system administrator whenever certain errors are encountered. The Messenger distinguishes between message related notifications and application (or system) related events.

9.4.6.1 Add message events receiver



To receive a notification in case a message could not be processed as expected the user can choose from a list of events for which he/ she requires a notification. This can be done by adding Message Event Receivers. Click on the "[Add Message Event Receiver](#)" button and enter the following, mandatory fields are marked with an asterisk*:

- **e-mail address***: Enter e-mail address of the e-mail recipient.
- **With HTML attachment**: Select the checkbox if you want to include the message content as HTML rendered attachment
- **Message event***: Select one or multiple message events from the drop-down list which will trigger an e-mail notification
- **Subject Elements***: The default subject of the e-mail notification will be as follows: "Notification for message" + Message ID
 You can customize the subject of the e-mail notification by selecting **Subject Elements** from the drop-down list. If you define several subject elements, they will be separated by blanks in the subject line. You can use the following element types:
 - **Text**: a static text that you enter in the text box.
 - **Variable**: a predefined variable such as the Message ID, the Message Type or the Receiver ID/Display Name.
 - **Xpath**: the xpath to an XML element/attribute contained in the payload message.

Please note that only a subset of the complete xpath syntax is supported for the definition of subject elements. In particular, the following restrictions apply:

- The xpath must be an absolute path starting with the root node of the payload document.
- The xpath must refer to an actual node within the document. In the case of multiple nodes that satisfy the xpath, the first occurrence will be used.
- Reference to node attributes is not possible.
- Use of conditional expressions is not possible.



The use of xpath values as notification subject elements may lead to decreased performance, because the entire payload message has to be parsed in order to resolve the xpath expression.

You can add additional **Subject Elements** by clicking on the  icon. It is possible to delete Subject Elements by clicking on the delete  icon.

9.4.6.2 Add system events receiver

To receive a notification in case the application is experiencing an unexpected situation the user can choose from a list of events for which he/ she requires a notification. To specify an address and event(s) click on the "[Add System Event Receiver](#)" button. Mandatory fields are marked with an asterisk*.



- **e-mail address***: Enter the e-mail address for this receiver in the text field.
- **Subject***: Enter a subject for the e-mail.
- **System Event***: Select the event from the drop-down list for which this receiver is to be notified.

You can add additional **System Event Receiver** by clicking on the  icon. It is possible to delete System Event Receiver by clicking on the delete  icon.

9.4.6.3 Add Cron expression

To be able to receive mail notifications collectively for multiple events within a time interval the messenger allows you to define cron expressions. Click on the "[Add Cron Expression](#)" button. Mandatory fields are marked with an asterisk*.

- **Cron expression***: Allows to manually set a standard unix "cron expression" to define the email scheduling. Cron expressions are described at http://en.wikipedia.org/wiki/CRON_expression
- **Maximum notifications per e-mail***: The maximum number of notifications per transmitted eMail can be defined. As a result there will be multiple eMails created if the limit per transmission is reached.

You can add additional **Cron expressions** by clicking on the  icon. It is possible to delete Cron Expressions by clicking on the delete  icon.

9.4.7 Enter Communication settings

Under **General Configuration** you can specify several additional settings, mandatory fields are marked with an asterisk*.

- **Retransmission Handling**: you can use this setting to specify the number of **Retries*** (retransmission attempts) and the **Retry Interval*** (in seconds) between attempts. If a message cannot be transmitted successfully in the specified number of retries, the Messenger will give up and mark the message as "failed".
- **Message ID Domain***: this will be used as suffix when message IDs are automatically generated.
- **SSL Server certificate check**: if you enabled this option only communication with servers, that use SSL certificates that have been issued by a trusted CA known to your Messenger are allowed. Additionally this setting enables the daily check of server certificate for revocation against the corresponding CA. There for the server certificates are stored for later revocation check. The following behavior is identical to "Partner certificate revocation check" (see below).
- **Allow loopback**: makes it possible to send messages from a Local Partner to another Local Partner.
- **Requeue failed messages**: if you enable this option the messages which could not be transmitted successfully (TTL expired) to the partners shall be re-inserted into the outbound queue. Thus enabling the Messenger to automatically retry the transmission of these messages.
- **Partner certificate revocation check**: If enabled each partner certificate and SSL client certificate is checked once per day against the corresponding CA to ensure it is still valid and wasn't revoked. If CA couldn't be reached properly, the existing certificate will still be treated as valid and will be re-checked the next day. After three days of unsuccessful communication a certificate will be treated as INVALID and won't be used anymore.

- **Ping-ALL:** if this option is enabled the Messenger sends ebXML or AS4 Pings for all Agreements with activated Ping-All option and for all defined URLs (primary and fallback). The results can be queried with the JMX interface. During communication failures (TTL expired) the messenger switches to the defined fallback URI in the agreement if the partner is unreachable via the primary URI.
- **Ping-All Interval (minutes):** defined time intervals to check if the communication partner is reachable.

If your Messenger will be connecting to the Internet via a proxy server you must enable HTTP Proxy and/or FTP Proxy.

Enable HTTP Proxy Configuration

Mandatory fields are marked with an asterisk*.

- **Host*:** Enter the IP address or hostname of your HTTP proxy server.
- **Port*:** Enter the port number of your HTTP proxy server.
- **Username/Password:** Enter user/password to be used.
- **NT Domain:** The NT Domain is only required if your proxy server uses NTLM authentication.
- **Bypass Proxy for:** Enter hostname(s) that should not use the HTTP proxy server. Additional hostnames can be added via the **+** icon.

If you are using a PONTON X/P Listener you have the option of using the Listener as a proxy server for outgoing messages. In order to use the Listener as the Messenger's proxy server select enable for **Proxy** in Listener > Configuration.

Enable FTP Proxy Configuration

Mandatory fields are marked with an asterisk*.

- **Host*:** Enter the IP address or hostname of your FTP proxy server.
- **Port*:** Enter the port number of your FTP proxy server.
- **Username/Password:** Enter user/password to be used.



9.4.8 Enable Time Server

PONTON X/P need to use a correct time setting to ensure trouble-free exchange of Messages and business transactions. The standard solution for this issue is to synchronize the local system time with a time server. There are many high-precision time servers – so-called NTP servers – that can be accessed on the Internet. In general, communication between applications and NTP servers is carried out via UDP packets on port 123. Time synchronization can be carried out at operating system level, or at application level.

If the computer that hosts the Messenger application already has automatic time synchronization at system level, it is recommended to disable the Time Server feature.



Depending on your requirements, you can activate/deactivate the Messenger's Time Server synchronization by selecting/de-selecting the "enabled" checkbox. Mandatory fields are marked with an asterisk*.

- **NTP Server:** Enter the NTP server IP or name
- **Synchronize Interval*:** This defines how often the application will synchronize with the NTP server(s) – when enabled. The default setting is to synchronize every 24 hours.



You can add additional **NTP Server** by clicking on the  icon. It is possible to delete NTP Server by clicking on the delete  icon.

9.4.9 Enter Server settings

9.4.9.1 Connectors

You can add additional Connectors by clicking on the  icon. It is possible to delete Connectors by clicking on the delete  icon. Mandatory fields are marked with an asterisk*.

- **Protocol*:** Select the protocol (HTTP/HTTPS) you want to use from the drop-down list
- **Port*:** Enter the Port you want to use
- **Service*:** This defines what Services will be available on the port:
 - LISTENERS: allows to received inbound HTTP messages
 - ADAPTER_SERVICE: communication interface for external adapters
 - GUI: old web-GUI (does not have an effect)
 - REST: provides an REST API and also the new web-GUI
 - HTTP_ADAPTER: activates a HTTP Adapter instance (see chapter [Http Adapter](#) for configuration details)

You can add additional **Services** by clicking on the  icon. It is possible to delete Services by clicking on the delete  icon.

You can define multiple connectors for the communication with the Messenger. A connector specifies the protocol and the port for one or multiple services.

9.4.10 Enter Archive settings

9.4.10.1 Archive Folder

Mandatory fields are marked with an asterisk*.

- **Archive Folder*:** Setting can be used to indicate the location of the archiving folders. These can be expressed either as an absolute path to the required folder or a relative path beginning with '\$PONTONXP_HOME' – this placeholder refers to the folder [installation root]\data.
- **Archive Failed Folder*:** You can define a separate folder, which will be used to store failed messages. If you prefer to store all your data in a single archive, you can use the same path setting as the Archive Folder.
- **Zip Compression:** Enable Zip Compression to reduce the space of the archive on disk.

9.4.10.2 Archivable Message Parts

Select which information should be archived in the a dedicated directory. Each part is stored in a separate file. Each of the listed parts of a message can be archived. You can enable or disable the archiving service for each part by activating/deactivating the corresponding checkboxes.

- **Backend Envelope**
- **Packaging Envelope**
- **Payload – this is the actual business document**
- **Certificate**
- **Signature**
- **Attachment**

9.4.10.3 Archive Database and Filesystem Settings

Files older than the maximum age will be deleted from the filesystem and / or the database as long as "Delete Database entries" and "Delete in Filesystem" is enabled and "Maximum Age for Files" and "Database Maximum Age" has been defined. Mandatory fields are marked with an asterisk*.

- **Cleanup Time***: Deletion of files from the file system and / or the database will start at the specified cleanup time. If no value for the cleanup time is set and deletion is activated the messenger will automatically start the cleanup at 03:00:00 Hours.
- **Maximum runtime of Cleanup-Job (minutes)**: The Cleanup-Job will stop, when this maximum runtime (in minutes) is reached and will continue at configured cleanup time the next day.
- **Delete Database entries**: Select this option if you want to delete database entries when the maximum age has been reached.
- **Database Maximum Age (days)***: The 'Maximum Age' setting specifies the maximum number of days the message related information is retained.
- **Delete in Filesystem**: Select this option if you want to delete in filesystem when the maximum age has been reached.
- **File Maximum Age (days)***: The Maximum Age setting specifies how long the files will be archived – expressed in days.

9.4.11 Set-up Maintenance periods

Click on "Add maintenance period" to enable maintenance which requires to set up at least one maintenance period. Maintenance is used for disable message exchange with all remote partners.

- **From**: Start of maintenance period
- **To**: End of maintenance period
- **Stop delivery to adapters**: incoming messages remain in the inbound queue and will not be sent to adapters.
- **Stop delivery to partners**: outgoing messages remain in the outbound queue and will not be sent to partners.
- **Rejection of incoming messages**: No messages from partners are accepted by the Messenger. The sender will receive an error response.
- **Rejection of outgoing messages**: No messages from the backend adapters are accepted by the Messenger. The adapter will receive an error response.

9.4.12 Enter Listener Connection settings

Selecting "enabled" will allow you to enter the Listener connection settings. Mandatory fields are marked with an asterisk*.

- **IP Address Listener***: Enter the IP address for the Listener connection (Messenger to Listener).
- **Port***: Enter the port for the Listener connection (Messenger to Listener). The standard port number for this connection is 9000

- **Data connection count*:** The Data connection count refers to the number of parallel communication channels between Listener and Messenger. This number also limits how many simultaneous message transmissions are accepted by the Listener. As per default this is set to 3, but can be increased up to 25.
- **SSL:** SSL is enabled by default. In case you set `InternalCommunication.UseSSL=false` in your `Listener.properties` then you have to disable SSL on this page as well. The Listener will only accept connections from known Messenger instances which are listed in the `ListenerConfiguration\config\authorization.txt` file in the Listener installation.

First Connection

The first connection from a Messenger instance to a freshly installed Listener will always be accepted by the Listener!

Messenger Instance ID

While testing the connectivity between a Listener and a Messenger please make use of the `ListenerInstallation\logs\listener.log` where the incoming connections from the Messenger including its instance ID are logged.

9.4.13 Authentication Token

The following security settings can be configured:


- **Random secret at restart:** When enabled restarting will invalidate all sessions requiring to log in again.
- **Ignore IP address:** If disabled a given session will only work from the IP address it was started with. Switching to another network during an active session therefore requires logging in again.
- **Expiration time:** This is the time in minutes a session is valid. After this amount of inactivity the GUI automatically ends the session and invalidates the authentication token. The session will not terminate if the GUI is permanently interacted with. An application using the REST-API will have to perform this token refresh manually.


9.4.14 Display

- **Messenger name:** The messenger name displayed in the top navigation bar can be changed. Type in the desired name and click on save.
- **Color adjustment:** Grab and hold (left mouse click) the dot and move the dot to the right side in order to change the color of the top navigation bar. When the desired color has been selected click on save. Alternatively you can type in a number from 0 (default) to 359 in order to vary the color.


9.5 Server certificate

This page allows you to request, install, export and delete certificates for your server. You need those certificates to be able to receive messages via HTTPS when no Listener is used.


When you have received the SSL certificate, open the "Install Server Certificate" Dialog by clicking on the Install Certificate  icon. Either choose a file by clicking on "Choose files" or drag-and-drop the file into the

marked area. The name and size of the file will appear in the dialog box. You can remove the file by clicking on the  symbol. If the file is valid and you have entered a password for the private key you can click on the "Install" button to add this Server certificate to your Messenger configuration. When the installation was successful the new Certificate will appear in the Server Certificates list.

9.5.1 Request Server certificate

Click on the request new certificate  icon which opens the request certificate dialog box. Fill in the certificate request form. The mandatory fields are marked with an asterisk*:


- **Certificate Name***
- **SAN Value* (subject alternative name)**
- **Organisation***
- **E-mail address***
- **Country*** (select)
- **Key pair*** (select)
- **Private key password***
- **Repeat password***

Optional input fields are: Department; Locality; State or province; Phone number; Fax number. You can also select to build the request with PONTON attributes. You can add additional SAN values by clicking on the by clicking on the  icon. It is also possible to delete a SAN value by clicking on the delete




icon. Please note that at least one SAN value is required. When you have filled out all required fields the "Request certificate button" becomes active.

9.5.2 Request Server Certificate (pre-existing)

Click on the request certificate  icon, which appears on the right hand side of the Server Certificate table row when you hover with your mouse over the Server Certificate for which you want to request a new certificate. On click the request certificate dialog box opens. Fill in the certificate request form. The mandatory fields are marked with an asterisk*:

- **Certificate Name***
- **SAN Value***
- **Organisation***
- **E-mail address***
- **Country*** (select)
- **Key pair*** (select)
- **Private key password***
- **Repeat password***

Optional input fields are: Department; Locality; State or province; Phone number; Fax number. You can also select to build the request with PONTON attributes. You can add additional SAN values by clicking on the by clicking on the  icon. It is also possible to delete a SAN value by clicking on the delete





icon. Please note that at least one SAN value is required. When you have filled out all required fields the "[Request certificate button](#)" becomes active.

new SSL certificate



You need to restart PONTON X/P to let it use the new SSL certificate.

9.5.3 Export Server Certificate



Click on the export  icon, which appears on the right hand side of the Server Certificate table row when you hover with your mouse over the Server Certificate you want to export. When you click on the export  icon the Export Certificate dialog will appear. Select either Base64 PEM or Binary DER as format. If you select to "Export the certificate with Private Key" you need to enter the private key password. Clicking on the "[Export](#)" button will download the Server Certificate to your local folder.

9.5.4 CA Certificates



9.5.4.1 Install Server CA Certificates

When you receive the CA's root certificate as a file (e.g. *.cer) click on Install CA Certificate  icon. Either choose a file by clicking on "[Choose files](#)" or drag-and-drop the file into the marked area. The name and size of the file will appear in the dialog box. You can remove the file by clicking on the  symbol. If the file is valid click on the "[Install](#)" button to add this CA certificate to your Messenger configuration. When the installation was successful the new Certificate will appear in the Server CA Certificates list.

9.5.4.2 Export Server CA Certificates


Click on the export  icon, which appears on the right hand side of the Server CA Certificate table row when you hover with your mouse over the Server CA Certificate you want to export. When you click on the export  icon the Export Certificate dialog will appear. Select either Base64 PEM or Binary DER as format. Clicking on the "[Export](#)" button will download the Server CA Certificate to your local folder.

9.5.4.3 Delete Server CA Certificates

Click on the delete  icon, which appears on the right hand side of the Server CA Certificate table row when you hover with your mouse over the Server CA Certificate you want to delete. When you click on the delete  icon a confirmation dialog opens, Clicking on the "[Yes](#)" button will delete the Server CA Certificate.

10 Messenger >Activation

Go to: MESSENGER  > Activation

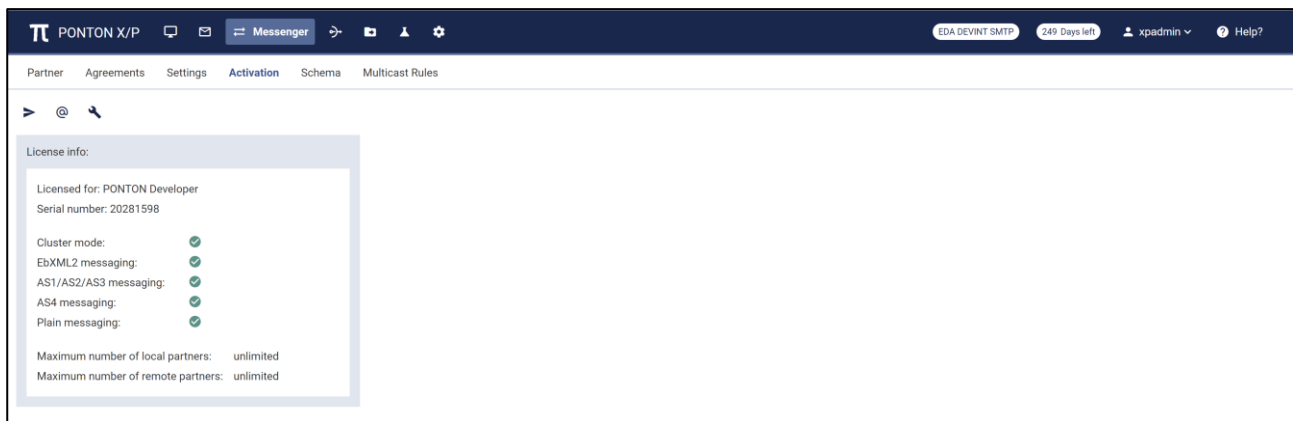

10.1 Get license info

On the Messenger Activation page you can find important information about the PONTON X/P Messenger license. The following details are listed:

- - **Licensed for** - license owner
 - **Serial Number** - license serial number
 - **Cluster Mode** - true, if cluster mode is allowed
 - **EbXML2 Messaging** - true, if EbXML v2 messaging is allowed
 - **AS1/AS/AS3 Messaging** - true, if AS1/AS2/AS3 messaging is allowed
 - **AS4 Messaging** - true, if AS4 messaging is allowed
 - **AS4 elliptic curve** - true, if elliptic curve algorithms can be used in AS4 Messaging
 - **Plain Messaging** - true, if plain messaging is allowed
 - **Maximum Number of Local Partners** - limitation for own partners
 - **Maximum Number of Remote Partners** - limitation for communication partners

if no license is installed, then this page will display the limitations of the trial license.


The following chapters describes how to install and activate licenses for PONTON X/P. Please note that direct activation via HTTP is not available for trial licenses (included with the software distribution). To activate a trial version you will have to send the activation request by e-mail. Please go to the [Initial Setup](#) chapter for more information.

10.2 Send Activation Request

Depending on your license conditions it may be necessary to activate your license after it is installed. To complete your license activation click on the send ➤ icon. This will activate the license almost immediately. If the license was successfully activated the updated license name e.g. Licensed for: PONTON GmbH is displayed in the under license info on the activation page and the remaining lifetime of the license is displayed on the right side of the navigation bar. e.g. Days left: 1096.

The activation by HTTP will only work if the PONTON activation server (the default URL is <https://xpactivation.ponton.de/webactivation/HttpListener>) is reachable from the Messenger server. Otherwise please use the activation by e-mail.

10.3 Mail the Activation Request


To submit your activation request by e-mail, click on the mail request  icon and click on the "[Copy to clipboard](#)" which copies the complete activation request text in the dialog box to your clipboard. Create a new e-mail with your preferred e-mail client and paste the content in the e-mail. Send the e-mail to activation@ponton.de.

Notes

When sending your activation request by e-mail, make sure activation request code is complete and includes the lines "---- BEGIN ACTIVATION REQUEST ----" and "---- END ACTIVATION REQUEST ----".

10.4 Install activation/license


10.4.1 Installing a license activation

If you have submitted a license activation request via e-mail you will receive a reply containing your activation code. Click on the install license  icon and paste the activation code into the text box "**Paste activation or license here**". Make sure that the activation code is complete and includes the lines "----- BEGIN ACTIVATION -----" and "----- END ACTIVATION -----". Click on the "[Install](#)" button to install the activation. Following the activation the updated license name e.g. Licensed for: PONTON GmbH is displayed in the under license info on the activation page and the remaining lifetime of the license is displayed on the right side of the navigation bar. e.g. Days left: 1096

New activation

Depending on your license conditions, you may need to repeat the license activation process after making certain changes to your own partner configuration.


10.4.2 Installing a license

You will generally receive your Ponton X/P license as a text or e-mail from PONTON GmbH or from your licensing organization. To install your license click on the install license  icon and paste the license code into the text box "**Paste activation or license here**". Make sure that the license code is complete and includes the lines "----- BEGIN LICENSE -----" and "----- END LICENSE -----". Click on the "[Install](#)" button to install the license.

11 Messenger >Schema

Go to: MESSENGER  > Schema

11.1 View available Schema Sets



The schema set table displays a list of all available Schema Sets. The number in the first column displays how many Message types are available in that specific Schema Set. You can expand the table rows by clicking on the fold/unfold icon  before the Schema Set name. When you expand the Schema Set you will see entries for the Type, Version, Location and Namespace headings.

PONTON X/P Messenger EDA DEVINT SMTP 249 Days left xpadmin Help?					
Partner Agreements Settings Activation Schema Multicast Rules					
	SchemaSet	Type	Version	Location	Namespace
1	> BINARY				
1	> EDIFACT_D96A				
1	> EDIFACT_D99A				
4	> gebotsabgabe2.1.1				
2	> ebUtilities2.00				
2	> ebUtilities3.00				
83	> wp6.00				
1	> BL_PAY_01.00				
3	> BL_REJ_01.00				
4	> CM_REQ_OFF_01.01				
4	> CM_REQ_OFF_01.10				
4	> CM_REQ_ONL_01.01				
4	> CM_REQ_ONL_01.10				
1	> CM_REV_CUS_01.00				

Activating Schema Sets

The Messenger distinguishes between available Schema Sets and activated Schema Sets. Just inserting entries in the schema configuration, as described in this section, does not activate the Schema Sets or the corresponding schema's for use by the Messenger. In order to make use of the schema's in a Schema Set, you have to activate the Schema Set in the Local Partner configurations > **Schema Sets** section (or Remote Partner configuration > **Schema Sets**) and the agreements configuration > **Schema Set** section


11.2 Import a new Schema Set


Click on the plus  icon (top left) to import a new Schema Set which opens the "Upload Schema Set" dialog box. Either choose a file by clicking on "Choose files" or drag-and-drop a valid file into the marked area. Only ZIP files containing .dtd .xsd and .xml files are accepted by the GUI. The name and size of the file will appear in the dialog box. You can remove the file by clicking on the  symbol. When the file is valid you can click on the "Upload Schema Set" button to start the upload process. When the upload was successful the new Schema Set will appear in the Schema Set list.

12 Messenger > Multicast Rules

Background:

Multicast rules allow the sender of a message to send duplicates of certain messages to additional receivers (copy receiver). Messages for which multicast rules apply must specify an receiver and copy receiver as well as Schema Set and Message Type. Duplicated messages are shown in the Message Monitor and can be processed like any other messages. The conversation ID of duplicated messages is identical with the conversationId of the original message, while the MessageId of the duplicated messages is derived from the original MessageId. In order to set up multicast rules go to:



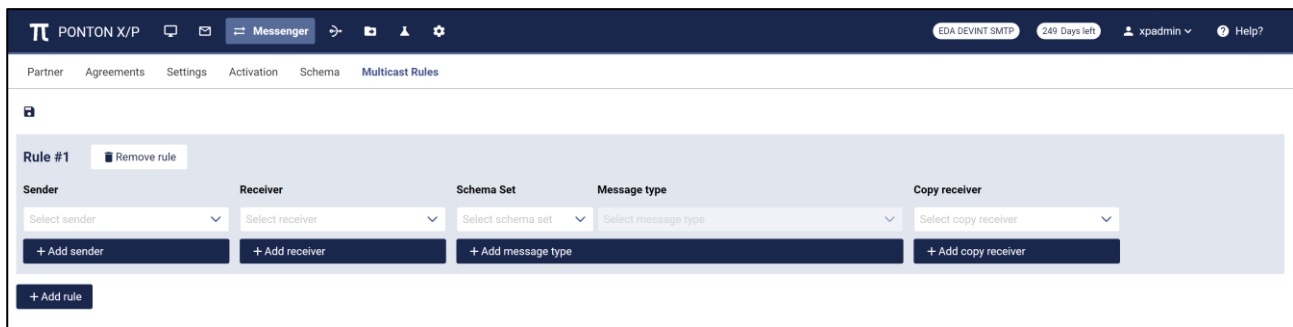Go to: **MESSENGER**  **Multicast Rules**



Click on the **+ Add Rule** button to add a new rule which opens the "Rule #1" for the first rule. Just click on the **+ Add Rule** button again if you would like to set up another rule. There are no limits on how many rules you can add.

- **Sender:** Sender who is creating the Message in his backend
- **Receiver:** Receiver of the original Message who is responding with an acknowledgement (ACK) Message
- **Schema Set:** Schema set for which the created rule applies
- **Message Type:** Message Type within a Schema Set for which the rule applies
- **Copy Receiver:** The receiver of the duplicated message. The acknowledgement for a duplicated message appears in the XP Messenger but is not passed to the backend of the Sender.

You must select at least one of each criteria above for a valid rule. You can add additional values for Sender, Receiver, Messages Types and Copy Receiver by clicking on the **+ Add...** button. When selecting multiple senders, receivers or message types a match on any of them will trigger a copy to all the copy receivers.

Click on the save icon  to save the completed rule. In order to remove a rule click on the  Remove Rule button.

13 Listener Configuration and Certificates

Go to: **LISTENER** 

The Listener configuration enables you to specify the Listener configuration in a distributed installation.

13.1 Listener Configuration

To securely receive messages it is recommended to use the PONTON X/P Listener. The Listener can run on a computer in the DMZ, separate from the Messenger. The purpose of the Listener is to accept incoming connections and forward the data to the Messenger (across the firewall). The firewall rules must be set up to allow a connection from the Messenger to the Listener.

If you are going to receive messages via the Listener, your partners will have to enter the public URI of your Listener in their configurations (under **MESSENGER**  → Partners → My Partners → <select partner> → Communication Tab → URI of Partner's Messenger Service).

Listener installation

You also have the option of subsequently installing the Listener as a service under Windows – this service can then be configured to start automatically when the system starts up. The service installer lies directly underneath the main listener folder after unpacking.

13.1.1 Proxy Settings

Enable or disable the use of the Listener as a HTTP proxy server for outbound connections.

- **IP Address / Port:** Select the IP address and the port on which the HTTP proxy server will be started. Make sure that the firewall allows connections from the Messenger to the HTTP proxy server.

13.1.2 HTTP Settings

Enable or disable the use of the Listener for incoming HTTP and HTTPS connections. The Listener IP address and the port number is used to receive messages from communication partners. If no specific IP address is selected, the incoming connections will be accepted on all available IP addresses on the specified port number.

- **HTTP / HTTPS** – enables the Listener to handle the relevant protocols.
- **IP Address Listener /Port:** Enter the **IP address** and **port** for incoming connections of the relevant protocol (HTTP or HTTPS).
- **Client certificate check** – specifies that the Listener will only accept HTTPS connections from clients that provide a known client certificate during HTTPS handshake. These client certificate can be installed under the **Client Certificates** tab.
You can not use this option if the HTTP is enabled too.
- **Use partner certificates** – specifies that the communication partner certificates installed in your Messenger's partner configurations will be copied to the Listener configuration and used for authentication of incoming HTTPS connections. This also enables automatic synchronization of Partner Certificates between Messenger and Listener.
- **Max. data size** – specifies the maximum size (in bytes) of incoming messages, including the transport envelope. The sender will receive a HTTP error when the message size is too large.

13.1.3 FTP Settings

Enable or disable the use of the Listener for FTP server connections. The data connection IP address and the port number is used to receive messages from communication partners.

- **IP Address Listener /Port:** Enter the **IP address** and **port** for the FTP server.
- **IP Address Data Connection /Port:** Enter the **IP address** and **port-range** for the Data connections. IP and Port are needed for FTP data transmissions. Please make sure that the correct public IP address is provided. The port-range limits how many simultaneous data transmissions can be executed, because each transmission requires a dedicated port.

When the FTP Listener has used up all data ports (one per data transfer), the next partner will have to wait for a data port to become available.

On the "[Add Logins](#)" button you can create, delete and edit FTP users and the mapping between FTP user and communication partner.



Login details

You must provide your communication partners with the FTP Login details (Login Name, Password, IP and PORT) so that they can deliver messages successfully to your FTP Listener.


13.2 Listener certificate

The **Listener Certificate** tab provides an overview of the installed Listener Certificate (SSL Server Certificate) for HTTPS or FTPS connections. The CA certificate belongs to the Listener certificate.



13.2.1 Install Listener Certificate

Open the Install Listener Certificate Dialog by clicking on the Install Certificate icon . Either choose a file by clicking on "[Choose files](#)" or drag-and-drop the file into the marked area. The name and size of the file will appear in the dialog box. You can remove the file by clicking on the  symbol. If the file is valid and you have entered a password for the private key you can click on the "[Install](#)" button to update the Listener Certificate. When the installation was successful the new Certificate will appear in the Listener Certificates list.



13.2.2 Request Listener Certificate

Click on the request certificate  icon, which appears on the right hand side of the Listener Certificate table row when you hover with your mouse over the Listener Certificate for which you want to request a new certificate. On click the request certificate dialog box opens. Fill in the certificate request form. The mandatory fields are marked with an asterisk (*):



- **Certificate Name; SAN Value, Organisation; E-mail address**
- **Country (select); Key pair (select)**
- **Private key password**
- **Repeat password**

Optional input fields are: Department; Locality; State or province; Phone number; Fax number. You can also select to build the request with PONTON attributes. You can add additional SAN values by clicking on the by clicking on the  icon. It is also possible to delete a SAN value by clicking on the delete  icon. Please note that at least one SAN value is required. When you have filled out all required fields the "[Request certificate button](#)" becomes active.

13.2.3 Export Listener Certificate

Click on the export icon , which appears on the right hand side of the Listener Certificate table row when you hover with your mouse over the Listener Certificate. When you click on the export  icon the "[Export Certificate](#)" dialog will appear. Select either Base64 PEM or Binary DER as format. If you select to "Export the certificate with Private Key" you need to enter the private key password. Clicking on the "[Export](#)" button will download the Listener Certificate to your local folder.

13.2.4 Install Listener CA Certificate



Open the Install Listener CA Certificate Dialog by clicking on the Install CA Certificate  icon. Either choose a file by clicking on "[Choose files](#)" or drag-and-drop the file into the marked area. The name and size of the file will appear in the dialog box. You can remove the file by clicking on the  symbol. If the file is valid

you can click on the "Install" button to add this Listener CA certificate to your Listener configuration. When the installation was successful the new CA Certificate will disappear in the Listener CA Certificates list.



Pre-installed CA certificate

The PONTON CA certificate is preinstalled, so you will not need to install a CA certificate if you use certificates issued by PONTON.

13.2.5 Export Listener CA Certificate

Click on the export  icon, which appears on the right hand side of the Listener CA Certificate table row when you hover with your mouse over the Listener CA Certificate you want to export. When you click on the export  icon the "Export Certificate" dialog will appear. Select either Base64 PEM or Binary DER as format. Clicking on the "Export" button will download the Listener CA Certificate to your local folder.



13.2.6 Delete Listener CA Certificate

Click on the delete  icon, which appears on the right hand side of the Listener CA Certificate table row when you hover with your mouse over the Listener CA Certificate you want to delete. When you click on the delete  icon a confirmation dialog opens, Clicking on the "Yes" button will delete the Listener CA Certificate.



13.3 Client Certificates

The client certificates tab provides an overview of all your client certificates, which are used for the authentication of HTTPS connections. The currently installed Client Certificates are shown in the Client certificates table.



13.3.1 Install Client Certificate

Open the Install Client Certificate Dialog by clicking on the Install Certificate  icon. Either choose a file by clicking on "Choose files" or drag-and-drop the file into the marked area. The name and size of the file will appear in the dialog box. You can remove the file by clicking on the  symbol. If the file is valid click on the "Install" button to add this Client certificate to your Listener configuration. When the installation was successful the new Certificate will disappear in the Client Certificates list.



13.3.2 Export Client Certificate

Click on the export  icon, which appears on the right hand side of the Client Certificate table row when you hover with your mouse over the Client Certificate you want to export. When you click on the export  icon the "Export Certificate" dialog will appear. Select either Base64 PEM or Binary DER as format. Clicking on the "Export" button will download the Client Certificate to your local folder.



13.3.3 Delete Client Certificate

Click on the delete  icon, which appears on the right hand side of the Client Certificate table row when you hover with your mouse over the Client Certificate you want to delete. When you click on the delete  icon a confirmation dialog opens, Clicking on the "Yes" button will delete the Client Certificate.



13.3.4 Install Client CA Certificate

When you receive the CA's root certificate as a file (e.g. *.cer) click on Install CA Certificate  icon. Either choose a file by clicking on "Choose files" or drag-and-drop the file into the marked area. The name and size of the file will appear in the dialog box. You can remove the file by clicking on the  symbol. If the file is valid click on the "Install" button to add this CA certificate to your Listener configuration. When the installation was successful the new CA Certificate will disappear in the Client CA Certificates list.

13.3.5 Export Client CA Certificate

Click on the export  icon, which appears on the right hand side of the Client CA Certificate table row when you hover with your mouse over the Client CA Certificate you want to export. When you click on the export  icon, the "Export Certificate" dialog will appear. Select either Base64 PEM or Binary DER as format. Clicking on the "Export" button will download the Client CA Certificate to your local folder.

13.3.6 Delete Client CA Certificate

Click on the delete icon , which appears on the right hand side of the Client CA Certificate table row when you hover with your mouse over the Client CA Certificate you want to delete. When you click on the delete  icon a confirmation dialog opens, Clicking on the "Yes" button will delete the Client CA Certificate.

CA Certificates

PONTON X/P uses trusted certificates to ensure the identity and authorization of communication partners. PONTON offers its own lightweight certification authority. This is the default CA Certificate in a standard PONTON X/P installation. If you want to use certificates issued by a 3rd party CA you will need to install the root certificate of the CA and all needed intermediate certificates. You will not be able to install partner certificates issued by a given CA until all needed CA certificates have been installed.


14 Hotfolder

Go to: **HOTFOLDER** 


14.1 View available Hotfolder

The **Hotfolder** table displays a list of all created Hotfolders. The following functions are available to easily find the table entry you are looking for:

- All table headings have a **Sort** function (icon). Sort can be ascending and descending.
- Some table headings have a **Filter** functions. Enter values in the filter text box and the table displays only values which contain the entered filter value. Filters can be combined.
- Underneath the table in the bottom right corner you find a **Pagination** function. The default pagination is 10 entries per page and can be changed to 25 or 50. Up to five pages are displayed in the page toggle bar, you can move forward or backward by clicking on the page number, the forward / backward icons or the first page / last page icon. The active page is highlighted in blue.

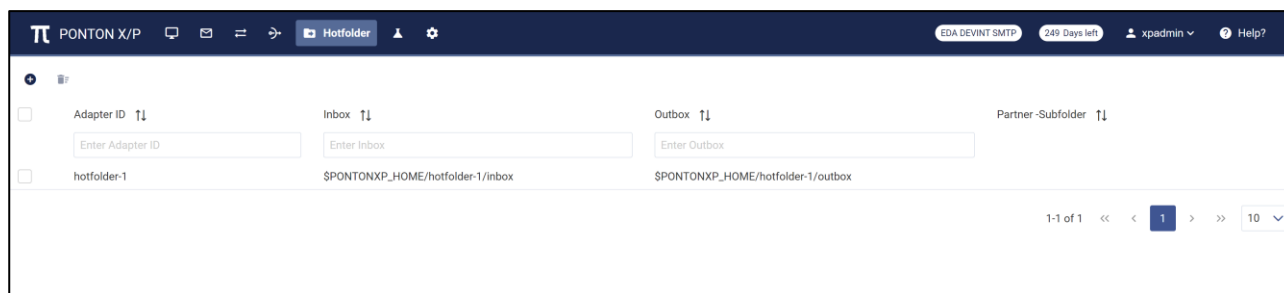

14.2 Create a new Hotfolder

Click on the "[Create a new hotfolder](#)"  icon which opens the "Create New Hotfolder" dialog box. Enter a "**New Adapter ID**" in the text box and click on the "[Next Step](#)" button which opens the **Configuration** page for the new Hotfolder. The Adapter ID you have created is displayed below the sub-navigation bar.

14.2.1 Enter General Settings

Mandatory fields are marked with an asterisk (*).

- **Work Folder***: Enter the folder for the Work Folder in the text box either as absolute pathname to the required folder or as relative pathname beginning with '\$PONTONXP_HOME' - this placeholder refers to the Messenger's 'data' folder.
- **Use XML acknowledgement**: If you activate this option, the Hotfolder will store acknowledgements generated by Messenger for every outgoing message in the specified folder.
- **XML Acknowledgement Inbox***: Enter the folder for your Acknowledgement Inbox in the text box using an absolute or a relative pathname.

Variables can also be used to define (Ack-)Inbox-paths. The example below shows how inbox paths can be specified using variables.

Inbox path configuration	(Example) Filename created in the Inbox	Hint
\$PONTONXP_HOME\TEST-HF\inbox\File_%test_flag%\%sender%	...\inbox\File_Test\EIC-CODE	<ul style="list-style-type: none"> • This folder will only be created once an incoming message has been received by the hotfolder • %sender% describes the sender of the incoming message • %receiver% describes the receiver of the incoming message

14.2.2 Enter Inbox Settings

Mandatory fields are marked with an asterisk (*).

- **Inbox Folder*:** Enter the folder for your incoming Messages in the text box either as absolute pathname to the required folders or as relative pathname beginning with '\$PONTONXP_HOME' - this placeholder refers to the Messenger's '**data**' folder.
- **Filename Pattern*:** Enables you to define individual filenames for the incoming files processed by the Hotfolder Adapter and individual folder structures while saving incoming messages and acknowledgements. The file name of incoming messages is defined by a naming scheme. The naming scheme is determined once per Hotfolder instance. The naming scheme consists of static and dynamic components. The dynamic components are represented as variables (please see the table below).
- **Max. number of parallel inbound messages*:** Enter a value specifying the maximum number of messages, that this Hotfolder Adapter should be able to receive in parallel.
- **Save BackEnd Envelope:** If you activate this checkbox, the Hotfolder Adapter will wrap **XML** payloads with a BackEnd Envelope containing meta data of the transmission.
- **Support attachments:** If this option is activated, the Hotfolder Adapter will save any files attached to an incoming message into the selected inbox.

If your Messenger was using the default Hotfolder settings previously, the following default values will now be shown as preconfigured in the Hotfolder configuration: **Filename Pattern:** payload-id-%database_id%.%default_extension% and **File processing:** autodetect

Following parameter values are supported as Filename patterns in the Hotfolder:

Variable	Type	Description of this value
%database_id%	Integer	Database ID of an incoming message.
%message_id%	Text	Message ID as defined by the sender.
%conversation_id%	Text	Conversation ID as defined by the sender.
%sender%	Text	Backend Partner ID of the sender in the local Messenger.
%receiver%	Text	Backend Partner ID of the receiver in the local Messenger.
%message_type%	Text	Message Type as recognised by the Messenger. This depends on the activated SchemaSets (and Message Types) as well as the agreement configuration in the Messenger.
%schema_set%	Text	SchemaSet as recognized by the Messenger. This depends on the activated SchemaSets (and Message Types) as well as the agreement configuration in the Messenger.
%timestamp%	Integer	Latest timestamp corresponding to the processing timestamp in the Hotfolder.
%test_flag%	Text	"Test" or "Production" depends on whether the Testflag is activated in the message or not.
%original_filename%	Text	The Filename without extension as sent by the sender of this message.
%default_extension%	Text	File extension determined by the Messenger for the received message content (payload).
%original_extension%	Text	File extension as sent by the sender of this message.



A list of widely used filename patterns can be seen in the table below:

Example: Filename pattern configured in the messenger	Example: Result of the filename on the filesystem	Comment
BEGIN_%database_id%_%sender%_END	BEGIN_7654321_EIC-CODE_END	The incoming message will be saved on the filesystem without any extension, as there is none defined
%message_id%.%default_extension%	MID-1234.xml	%default_extension% as recognised by the messenger for the incoming message type and schemaset
%conversation_id%.%default_extension%	Con-1234.edi	As more than one incoming messages can have identical conversation IDs saving such duplicates on the filesystem could cause problems
%timestamp%.%default_extension%	1398778711000.xml	The timestamp corresponds to the time of saving the file on the filesystem as variant time.

14.2.3 Enter Outbox Settings

Mandatory fields are marked with an asterisk (*).

- **Outbox Folder***: Enter the folder for your outgoing Messages in the text box either as absolute pathname to the required folders or as relative pathname beginning with '\$PONTONXP_HOME' - this placeholder refers to the Messenger's '**data**' folder.
- **Failed Folder***: Enter the folder for failed Messages in the text box either as absolute pathname to the required folders or as relative pathname beginning with '\$PONTONXP_HOME' - this placeholder refers to the Messenger's '**data**' folder.
- **Use partner subfolders**: If activated, the Hotfolder Adapter will create a separate subfolder in the outbox for each communication partner if an agreement with this partner exists. The name of the folder is the Backend Partner ID of the communication partner.
- **Sender**: If you enable Partner subfolders you must select a fixed sender for all messages from the drop-down list.
- **Scan interval*** (seconds): Enter a value in seconds specifying how often the Hotfolder Adapter should check for new files.
- **Min. file age** (seconds): Define a minimum age in seconds for your files to process. If you like to process files with a minimum age, the Hotfolder can filter your files by file age. The Hotfolder will wait until a given file age is reached and then process the file.
- **Max. number of parallel outbound messages***: Enter a value specifying the maximum number of messages, that this Hotfolder Adapter should be able to send in parallel.

- **File extension*:** Defines which files should be accepted by the Hotfolder for processing. You can add additional File Extensions if required by clicking on the  icon. It is also possible to delete a File Extension by clicking on the delete  icon. Please note that at least one File Extension is required.
- **File processing*:** Specifying processing options for outgoing files and allows the Hotfolder Adapter to recognize the type of files regardless of the file extension e.g. XML, BINARY. Processing options help you to define the content of the files which are dropped into the Hotfolder outbox irrespective of their file extensions.

The following table provides an overview of file processing options:

File Extension	Processing option	processing description
<ul style="list-style-type: none"> • txt • edi • xml • x12 	autodetect	<p>Using this configuration of the Hotfolder following result can be expected:</p> <ul style="list-style-type: none"> • Only 'txt', 'xml', 'x12' and 'edi' Files are picked up from the outbox • Files with other extensions will not be picked up from the outbox • The files will only be processed by the messenger if the following conditions apply <ul style="list-style-type: none"> ○ as an XML message <ul style="list-style-type: none"> ▪ if the content of the 'xml' file can be recognised as a valid XML ▪ and if the Message Type of the message is activated in the Agreement ○ as a BINARY message <ul style="list-style-type: none"> ▪ if the file has the extension 'txt' ▪ and if BINARY as Message Type is activated in the Agreement <p>Hint: All formats other than 'xml', 'x12' and 'edi' will be processed as BINARY as long as autodetect is activated</p>
<ul style="list-style-type: none"> • txt • edi • xml • x12 • png • pdf 	Binary	<p>Using this configuration of the Hotfolder following result can be expected:</p> <ul style="list-style-type: none"> • Only 'txt', 'xml', 'x12', 'png', 'pdf' and 'edi' Files are picked up from the outbox • Files with other extensions will not be picked up from the outbox • The files will only be processed by the messenger if the following condition applies: <ul style="list-style-type: none"> ○ BINARY as Message Type is activated in the Agreement



Outbox Subfolders

In case some older partner subfolders (without an agreement) already exist in your Hotfolder Outbox, please delete those obsolete subfolders manually, so that only the files from valid partner subfolders are collected by the Hotfolder.


AckInbox Folder

The Acknowledgement Inbox folder as well as Inbox subfolders are only created once incoming Acks or messages are received for the respective partner.

14.3 Delete a Hotfolder


Select one or several Hotfolders by clicking on the checkbox on the left hand side in the table row. The number of selected Hotfolders is displayed next to the delete  icon. Click on the delete  icon and confirm that you want to delete the Hotfolder.

14.4 Edit a Hotfolder


Select a Hotfolder by clicking on the edit icon  which will appear on the right hand side of the table row when you hover with your mouse over the Hotfolder you want to edit. When you click on the edit icon the Hotfolder **Configuration** page opens, You can go back to the **Hotfolder** page by clicking on the **"Back to Hotfolder"** button or leave the Hotfolder area by clicking on the navigation or sub-navigation bar.

15 Test Adapter

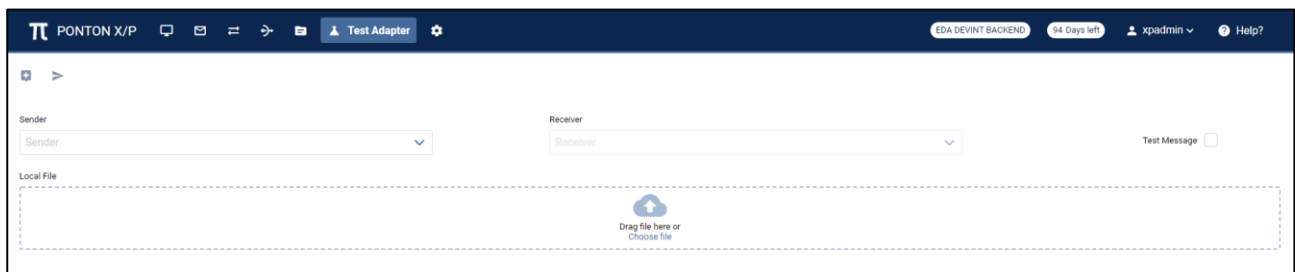

Go to: **TEST ADAPTER** 



15.1 Send a Ping message

PONTON X/P Messenger is delivered with a built in Test Adapter. It can be used to send EbXml or AS4 Ping messages to test the connectivity between your own Messenger and your communication partner. Select a sender and a receiver from the drop-down menus. Click on the  icon in order to execute a ping from sender to receiver. This will send a Ping message to the chosen receiver. If your Ping message could reach the receiver and he recognizes you as a partner the response should be a **Pong message**. A Pong message does not ensure that your firewall allows incoming messages from your business partner.

15.2 Send a Test Message

To send a test message file to your partner using the test adapter, select a sender and a receiver from the drop-down menus. The drop-down menu for the receiver enables you to search for a partner and select a partner from the returned list (in alphabetical order) of all partners matching the searched letters or name. Enable the Test Message checkbox in case you want to flag the message explicitly as test message. Either choose a file by clicking on **"Choose files"** or drag-and-drop the file into the marked area. The name and size of the file will appear in the dialog box. You can remove the file by clicking on the  symbol. When the file is valid you can click on the send  icon.

The file is processed by your Messenger and will be send to the specified receiver. Only if the processing and packaging settings at the receivers end conform to the settings in your

agreement and your network allows transmissions to your communication partner then the message delivery will be successful.

16 Http Adapter

16.1 Configuration

To configure a *HttpAdapter* you must create a new Server Connector under Messenger Settings with only one Service: *HTTP_ADAPTER*

For security reasons a valid Messenger user with the *HTTP-Adapter* role is required to communicate with the HttpAdapter.

NOTE: After a Messenger user is created, log in with the user to change the initial password.

16.1.1 using multiple Http Adapters

It is possible to create multiple HttpAdapters by creating several Server Connectors with unique port numbers.

A configuration file for each instance has to be created in the configuration folder. These files have to be named "*httpadapter_PPPPP.properties*" where PPPPP is the port number set in the Server Connector.

```
# required unique value
# it is the Adapter-ID value of this Http-Adapter.
httpadapter.id=HttpAdapter2

# required value
# The folder is used while processing messages.
httpadapter.work_folder=$PONTONXP_HOME/httpadapter_PPPPP/work

# required value
# This folder will contain the inbound messages that were not fetched by the backend yet.
httpadapter.inbound_folder=$PONTONXP_HOME/httpadapter_PPPPP/inbound

# required value
# This folder will store messages that were transmitted from the backend.
httpadapter.outbound_folder=$PONTONXP_HOME/httpadapter_PPPPP/outbound

# optional value
# If this value is set then only the defined user is authorized to use this Http-Adapter
httpadapter.accepted_user=httpadapter
```

Code Block 2 *httpadapter_PPPPP.properties*

16.2 Outbound Direction

To send a message through the HttpAdapter send a *POST* request to *http(s)://<PONTONXP_HOST>:<HTTP_ADAPTER_PORT>/httpadapter/outbound*

- replace <PONTONXP_HOST> with the correct PONTON XP hostname.
- replace <HTTP_ADAPTER_PORT> with the configured port for the HttpAdapter.

16.2.1 Request

The following *HTTP Headers* can be optionally set:

- X-MessageId - use this header to set the Message ID
- X-ConversationId - use this header to set the Conversation ID
- X-SchemaSet - use this header to explicitly set the schemaset of the message
- X-MessageType - use this header to explicitly set the message type of the message
- X-MessageVersion - use this header to explicitly set the message version of the message
- X-BackendSenderId - use this header to explicitly set the Sender Backend ID of the message
- X-BackendReceiverId - use this header to explicitly set the Receiver Backend ID of the message
- X-Filename - use this header to explicitly set filename of the message

Values for the Headers must use ASCII character set.

The *Request Body* must contain the data of the message.

16.2.2 Response

One of the following response codes can be received with the response:

- 204 (OK) - the message was successfully processed by the messenger
- 400 (Failed) - an error occurred while processing the message
- 401 (Unauthorized) - the used user is not accepted by the HttpAdapter

Depending on the response code the following *Request Headers* can be received with the response:

- X-MessageId - the Message ID of the message
- X-ConversationId - the Conversation ID of the message
- X-SchemaSet - the schemaset of the message
- X-MessageType - the message type of the message
- X-MessageVersion - the message version of the message
- X-BackendSenderId - the Sender Backend ID of the message
- X-BackendReceiverId - the Receiver Backend ID of the message

16.3 Inbound Direction

To receive a next message via the HttpAdapter send a *GET* request to `http(s)://<PONTONXP_HOST>:<HTTP_ADAPTER_PORT>/httpadapter/inbound`.

- replace <PONTONXP_HOST> with the correct PONTON XP hostname.
- replace <HTTP_ADAPTER_PORT> with the configured port for the HttpAdapter.

16.3.1 Request

The following *HTTP Headers* can be optionally set:

- X-DeleteAfterConfirmation - If the value of the header is **true**, the HttpAdapter delivers the same next message until the reception of the message is explicitly acknowledged by the client (see Request Header *X-LastId*). Otherwise, the HttpAdapter delivers the next message without waiting for an acknowledgement.
When this header does not exist, then no acknowledgement is expected.
- X-LastId - use this header to acknowledge the last successfully received message (see Response Header *X-Id*).

Values for the Headers must use ASCII character set.

16.3.2 Response

One of the following response codes can be received with the response:

- 200 (Ok) - the next message was successfully transmitted by the HttpAdapter
- 401 (Unauthorized) - the used user is not accepted by the HttpAdapter
- 404 (Not found) - there are no messages in the HttpAdapter


The following *Http Headers* are received with the response if the response code is 200:

- X-Id - unique message id generated by the Ponton XP
- X-Messageld - the Message ID of the message
- X-ConversationId - the Conversation ID of the message
- X-SchemaSet - the schemaset of the message
- X-MessageType - the message type of the message
- X-MessageVersion - the message version of the message
- X-BackendSenderId - the Sender Backend ID of the message
- X-BackendReceiverId - the Receiver Backend ID of the message
- X-Filename - the filename of the message.

The *Response Body* contains the data of the message.

17 User Admin

Go to: **USER ADMIN** 

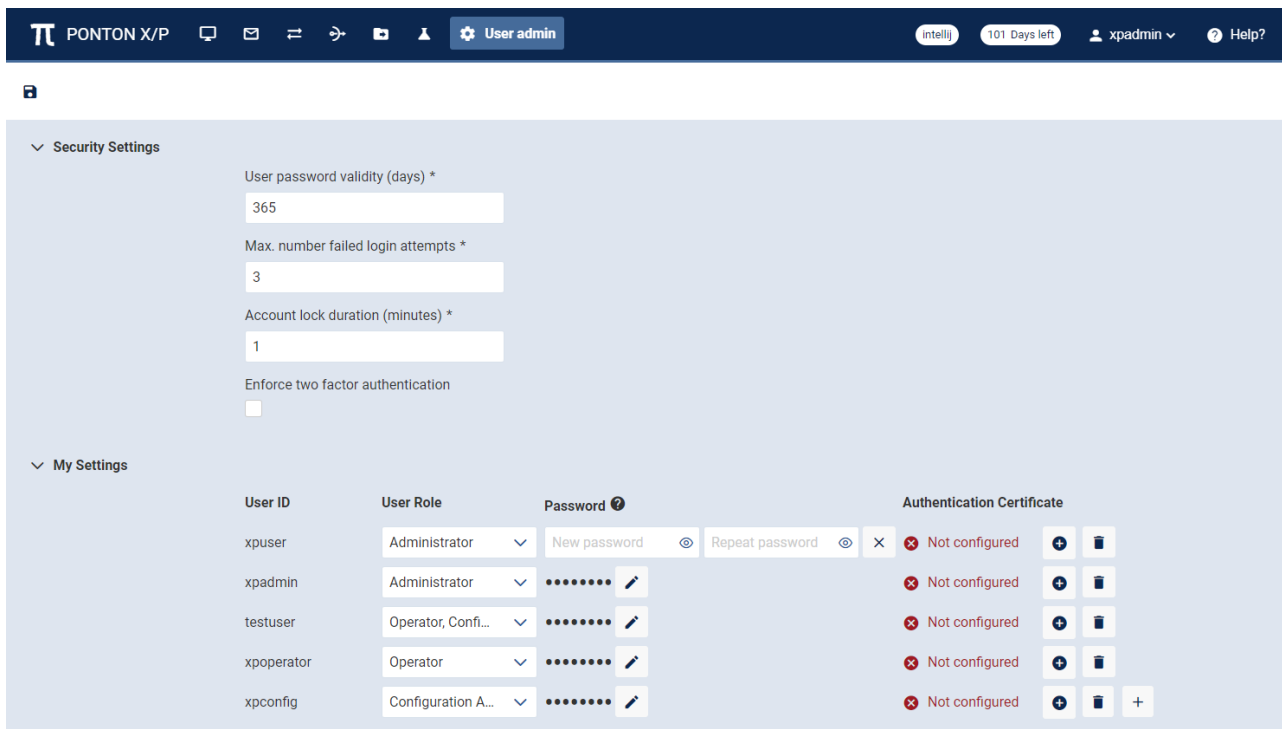

Security Settings

User password validity (days) *

365

Max. number failed login attempts *

3

Account lock duration (minutes) *

1

Enforce two factor authentication


☐

My Settings

User ID	User Role	Password	Authentication Certificate
xpuser	Administrator	New password	Not configured
xpadmin	Administrator	Not configured
testuser	Operator, Conf...	Not configured
xpoperator	Operator	Not configured
xpconfig	Configuration A...	Not configured


17.1 Enter and change security settings

17.1.1 Change user password validity


The expiry period for new user passwords is set by default to 365 days. To change this value please enter the new value (days) in the "**User password validity**" field and click on the save  icon. The value must be between 0 and 365 days and you can't leave the field empty.

With a value of 0 there will be no password expiry.

17.1.2 Change number of failed login attempts

A user account is temporarily locked when the number of failed login attempts exceeds a defined number. The default value for the maximum number of failed login attempts is 3. Enter the new number of failed attempts in the "**Max. number failed login attempts**" field and click on the save  icon. You can't leave the field empty.

17.1.3 Change account lock duration


The duration of the temporary lock to prevent brute force attacks can also be adjusted. By default accounts are locked for 1 minute. Enter the new lock duration in minutes in the "**Account lock duration**" field and click on the save  icon. You can't leave the field empty.

Unlock account

It is possible to unlock an account by using an administrator account to reset the password of a locked account.

17.2 User settings

17.2.1 Create a new user

When you click on the "[Create new user](#)"  icon, a new row of input fields is added to the user settings table. Enter a **User ID** in the "USER ID" field and select a User role with the drop-down menu.

The following types of user roles are available to choose from:

- **Administrators** – these users have full access to the Messenger's configuration interface.
- **Configuration Administrators** – these users have the same rights as Administrators but can not create new user or change user settings.
- **Operators** – these users are not allowed to make changes to the configuration, however they can view the current configuration.
- **HTTP-Adapter** - API users with full access to the Messenger's configuration

Please enter a valid password as well as repeat password for the new user. The new and repeat password must match and must meet the password criteria. You can view the password you have entered by clicking on the symbol



or hide it by clicking on the symbol



. The password criteria are as follows:

- minimal length of 12 characters
- at least one UPPER case letter
- at least one lower case letter
- at least one number
- at least one special character (!\"#\$%&'()*+,-./:;<=>?@[^_`{|})


When you have entered all required details please click on the save  icon.

17.2.2 Detailed overview of use role rights


Function	Administrator	Operator	Configuration Administrator	HTTP-Adapter
Change Messenger settings	yes	no	yes	no
Request/install server certificates	yes	no	yes	no
Delete messages	yes	no	yes	no
Re-send messages	yes	no	yes	no
Delete messages from queue	yes	no	yes	no
Export messages	yes	no	yes	no
Change message status	yes	yes	yes	no
Change own user settings	yes	yes	yes	no
Manage users (create/delete/change role)	yes	no	no	no
Change security settings	yes	no	no	no
Add/change/delete partner profile	yes	no	yes	no
Import partner profile	yes	no	yes	no
Request/install partner certificates	yes	no	yes	no
Request/install CA certificates	yes	no	yes	no
Add/change/delete agreements	yes	no	yes	no
Create schema	yes	no	yes	no
Add/change/delete multicast rules	yes	no	yes	no
Add/change/delete Hotfolder	yes	no	yes	no
Change Listener settings	yes	no	yes	no
Request license activation	yes	no	yes	no
Install activation/license	yes	no	yes	no
Send Ping	yes	no	yes	no

Function	Administrator	Operator	Configuration Administrator	HTTP-Adapter
Send test e-mail	yes	no	yes	no
Download configuration	yes	yes	yes	no
Download logs	yes	yes	yes	no
Send/Receive messages with http	no	no	no	yes


17.2.3 Delete a user

Click on the delete  icon on the right hand side next to the user you wish to delete. A confirmation dialog opens. Clicking on the "Yes" button will delete the selected user and the row will disappear from the table. Clicking on the "No" button will close the dialog and not delete the user.

17.2.4 Change user role

Click on the drop-down menu of the user you want to change and select the new role. Click on the save  icon.


17.2.5 Edit user password

Click on the edit icon  of the user which password you want to change. Enter a new valid password and matching repeat password. The password criteria are mentioned above (Create a new user). You can view the password you have entered by clicking on the symbol




or hide it by clicking on the symbol



. Click on the save  icon. In case you decide to leave the password unchanged click on the **x** icon and discard the changes.

17.2.6 Authentication certificate

As an alternative to the user/password based authentication It is possible to use TLS certificates when connecting to the REST API. A certificate is directly linked to a user and its roles.

Click on the add icon  in the row of a user where a certificate should be linked, to upload a certificate. A restart of the Messenger is needed for the certificate authentication to work.

18 Two-Factor Authentication

You can configure two-factor authentication with time-based one-time passwords in the user settings.

18.1 Prerequisites

To use two-factor authentication you will need an authenticator app (e.g. Microsoft Authenticator) that supports time-based one-time passwords.

18.2 Setup

1. Start by entering your current password into the "Verify password" input and press "Start Setup"

Two-Factor Authentication

✖ Disabled


Verify password

Start Setup

2. Now you should see a generated secret and a QR code. Scan that QR code with your authenticator app or alternatively copy the secret manually.

Two-Factor Authentication

Secret code



otpauth://totp/XP-Messenger:xpadmin@intellij?
secret=your%20secret%20here&period=30&issu
er=XP-Messenger

Verify one-time code

Enable

3. Your authenticator app should now generate a six-digit code. Enter this code into the "Verify one-time code" input and press "Enable"

Two-Factor Authentication

✓ Enabled

Verify password

👁

Disable

Now logging in with this user will prompt you for the six-digit one-time code from you authenticator app.

LOGIN TO PONTON X/P

ⓘ Please enter your one-time code to proceed.

One-time code

Verify

18.3 Disable

To disable two-factor authentication you will need to provide your current password to the "Verify password" input and press "Disable"

Two-Factor Authentication

✓ Enabled

Verify password


👁







Disable

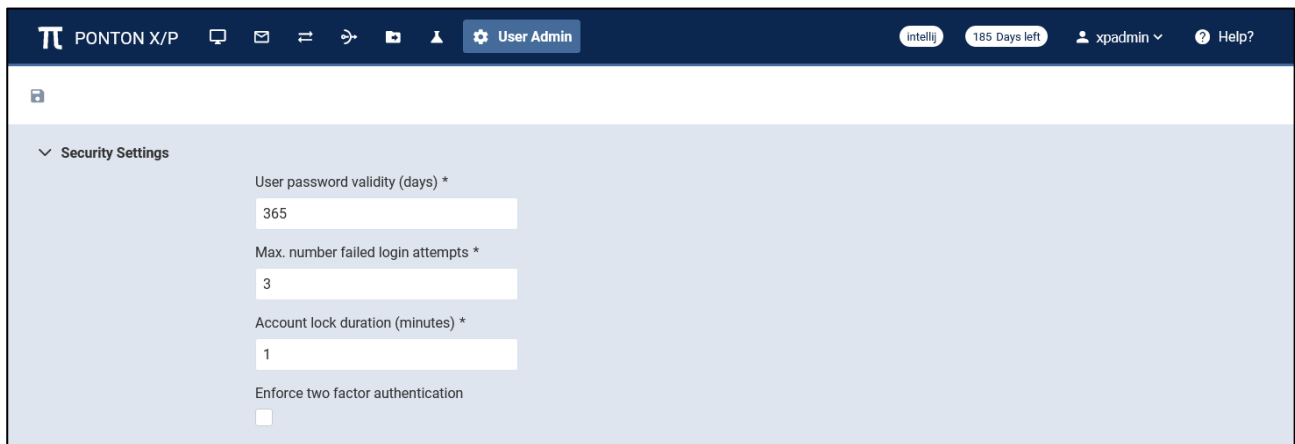18.4 Change Secret / Reconfigure

In order to reconfigure the secret just disable and re-enable two-factor authentication.

18.5 Enforce Two-Factor Authentication



π PONTON X/P       User Admin intelli 185 Days left xpadmin Help?

Security Settings

User password validity (days) *

365

Max. number failed login attempts *

3

Account lock duration (minutes) *

1


Enforce two factor authentication

☐

You can require two-factor authentication for all users by going to "User Admin" > "Security Settings" and tick the "Enforce two factor authentication" checkbox before saving.

Note: This option cannot be disabled from the GUI/REST API. To disable it you will need to change `Server/SecuritySettings/EnforceTwoFactors` to `false` in the `config/server.xml`.


Once enforced all users without two-factor authentication will be redirected to the settings page, next time they log-in, to set it the two-factor authentication. The GUI functionality is locked until the two-factor authentication is configured.

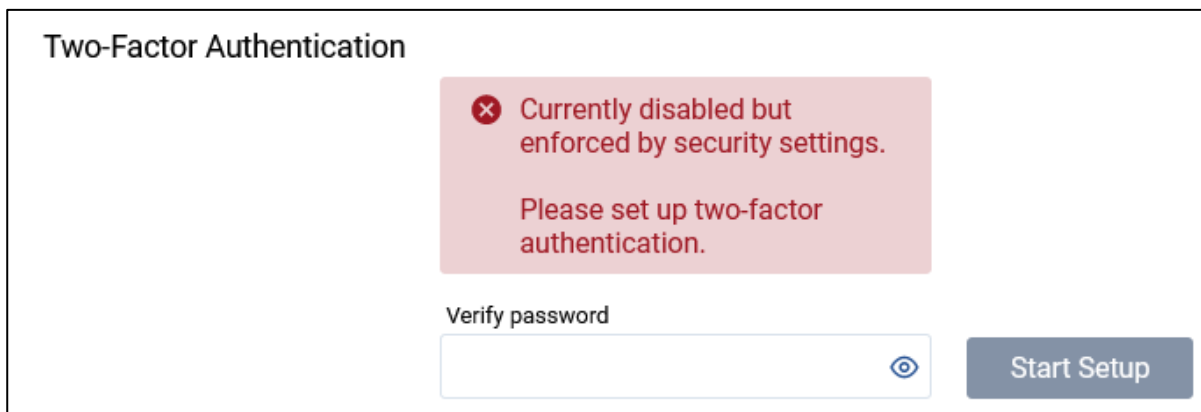

Two-Factor Authentication

✖ Currently disabled but enforced by security settings.
Please set up two-factor authentication.

Verify password



Start Setup

19 REST API

The PONTON X/P Messenger is using Swagger UI to generate an interactive API documentation that enables you to try out the API calls directly in the browser. SwaggerUI is included in the X/P Messenger and also allows you to configure your X/P Messenger via the REST API.

19.1 Authentication

Most of the API endpoints require an authentication, which is indicated with a lock symbol in the Swagger UI.

There are two options for a REST API client to authenticate:

19.1.1 Json-Web-Token (JWT)

A JWT has to be acquired by sending a POST request to `/api/authenticate` endpoint with a HTTP body containing the user and password like this:

```
{
  "username": "<YOUR_USERNAME>",
  "password": "<YOUR_PASSWORD>"
}
```

The response will contain a JSON text containing a token like this:

```
{
  "username": "xpadmin",
  "token":
  "eyJhbGciOiJIUzUxMiJ9.eyJqdXUiOiJ0b3RlSVAiOiIxMC45LjAuMzciLCJmb3J3YXJkZWRGb3IiOiIiLCJzdWIiOiJ4cGFkbWluIiwiaWF0IjoxNjkyODE1NjUwLCJleHAiOiJlY2OTI4MzM2NTB9.FPMfobMoOkilSMBFSbK5kq4SEowfhve7qZulE9cLVpcjNduzQoAQOvGo3duM3sDNxgMhNp6fCCYcTEbCpsF4rQ"
}
```

The token value has to be included with any request that requires authentication. To do this, a HTTP header "Authorization" with value "Bearer eyJhbGciOiJIUzUxMiJ9.eyJqdXUiOi....." has to be set.

The tokens are valid for a limited time, and a new token has to be requested if the authentication fails due to an expired token.

⚠ when two-factor-authentication is required, then the authentication request must contain a valid TOTP code for the user as shown in this example:

```
{
  "username": "<YOUR_USERNAME>",
  "password": "<YOUR_PASSWORD>",
  "totp": "123456"
}
```

19.1.2 TLS Client Authentication

An alternative to Json-Web-Token is to set a TLS client certificate, when calling the API.

The used client certificate must be installed in the [user administration page](#).

19.2 Using Swagger UI


You can find SwaggerUI at

`http(s)://<YOUR_MESSENGER_HOST>:<YOUR_MESSENGER_PORT>/api/swagger-ui`

Make sure to replace `<YOUR_MESSENGER_HOST>` and `<YOUR_MESSENGER_PORT>` with your actual host and port.

Before any other request you need to send a POST Request to `/authenticate` to login. To do so open `http(s)://<YOUR_MESSENGER_HOST>:<YOUR_MESSENGER_PORT>/api/swagger-ui/index.html?configUrl=/api/v3/api-docs/swagger-config#/Authentication/createAuthenticationToken` in your browser

You should now see something like this:

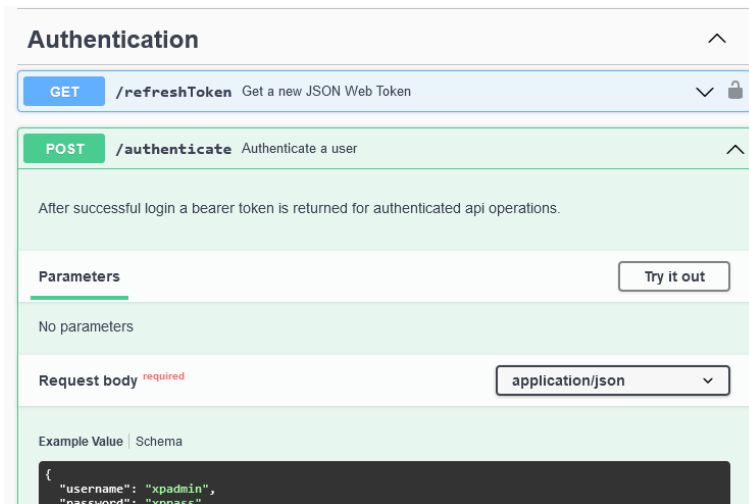

Authentication

GET /refreshToken Get a new JSON Web Token

POST /authenticate Authenticate a user

After successful login a bearer token is returned for authenticated api operations.

Parameters Try it out


No parameters

Request body required application/json

Example Value Schema

```
{
  "username": "xpadmin",
  "password": "xppass"
}
```

Now click on "Try it out".

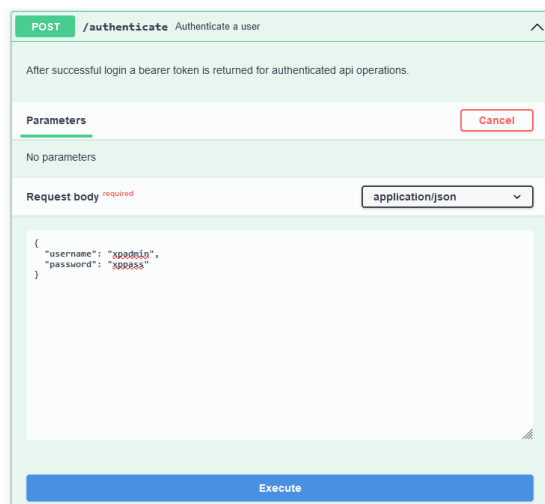

POST /authenticate Authenticate a user

After successful login a bearer token is returned for authenticated api operations.

Parameters Cancel

No parameters

Request body required application/json

```
{
  "username": "xpadmin",
  "password": "xppass"
}
```

Execute

It should now show a text input prefilled with:


```
{
  "username": "xpadmin",
  "password": "xppass"
}
```

replace all of that with:


```
{
  "username": "<YOUR_USERNAME>",
  "password": "<YOUR_PASSWORD>"
}
```

Now click on the blue "Execute" button at the bottom of the page.


If successful the server response below should look like this with a status code of 200:

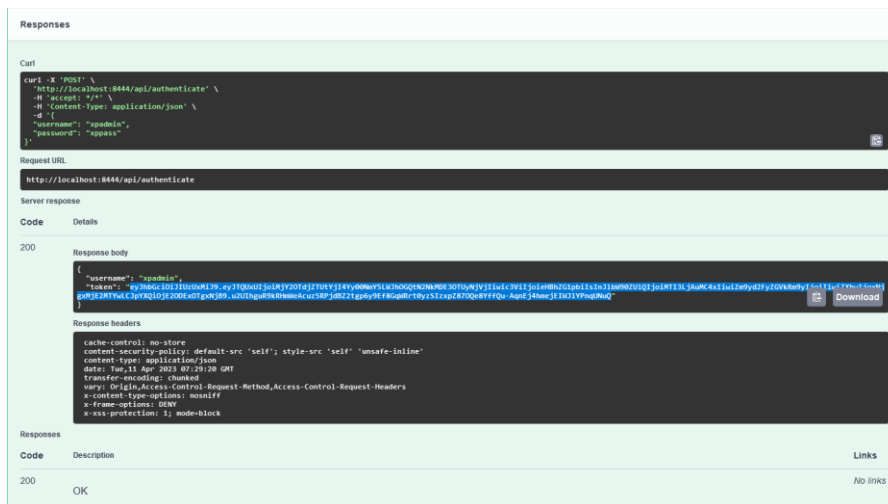

Copy the text between the quotation marks after "token:" (selected in blue in the image). Then click the "Authorize" button at the top.

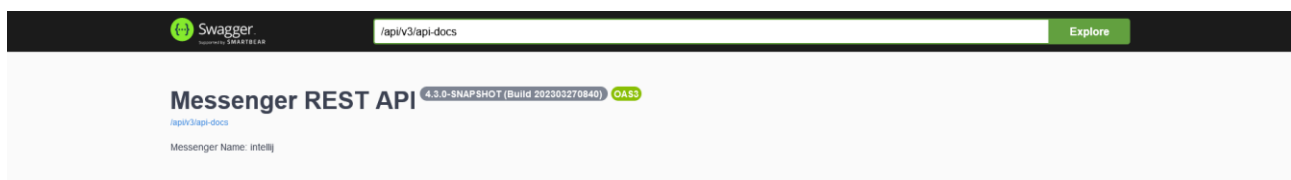

Lastly paste the previously copied token into the dialog and submit by pressing the "Authorize" button in the dialog.

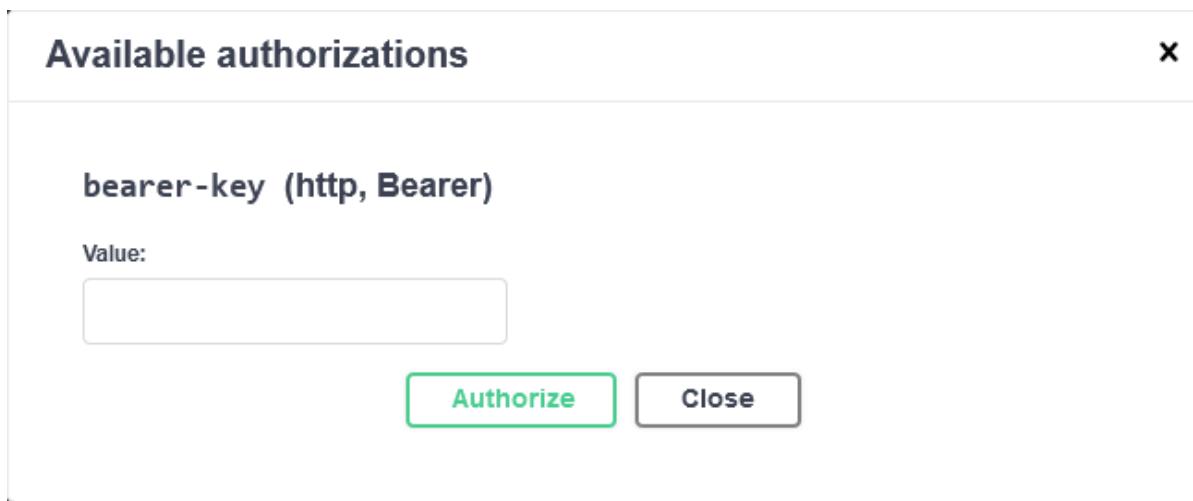

Now you should be able to perform any other operation.

19.3 Statistics

To find out how many messages were sent or received since the last Messenger start you have to call the following REST endpoint:

`http(s)://<YOUR_MESSENGER_HOST>:<YOUR_MESSENGER_PORT>/api/statistics/messages`

This can be done with the Swagger UI:

Statistics

GET
/statistics/messages
Get Total Messages

Get Total Messages metrics

200

Response body

```

{
  "inboundSuccessful": {
    "countSinceStart": 3314161,
    "fifteenMinuteRate": 1.8470320536242053
  },
  "inboundFailed": {
    "countSinceStart": 10,
    "fifteenMinuteRate": 4.44659081257e-313
  },
  "outboundSuccessful": {
    "countSinceStart": 3210992,
    "fifteenMinuteRate": 1.8140232970506944
  },
  "outboundFailed": {
    "countSinceStart": 5789,
    "fifteenMinuteRate": 1.0268625709716574e-23
  },
  "outboundRetries": 5379,
  "outboundTransmissionTime": 0.341832891
}

```

Download

- inboundSuccessful
 - countSinceStart - number of successfully received messages since last restart
 - fifteenMinuteRate - average number of successfully received messages per second within the last 15 minutes
- inboundFailed
 - countSinceStart - number of failed inbound messages since last restart
 - fifteenMinuteRate - average number of failed inbound messages per second within the last 15 minutes
- outboundSuccessful
 - countSinceStart - number of successfully sent messages since last restart
 - fifteenMinuteRate - average number of successfully sent messages per second within the last 15 minutes
- outboundFailed
 - countSinceStart - number of failed outbound messages since last restart
 - fifteenMinuteRate - average number of failed outbound messages per second within the last 15 minutes
- outboundRetries - number of send retries since last restart
- outboundTransmissionTime - average message transmission time in seconds

It is possible to obtain similar statistical values for only one partner by calling the following REST endpoint:
[http\(s\)://<YOUR_MESSENGER_HOST>:<YOUR_MESSENGER_PORT>/api/statistics/messages/<PARTNER_ID>](http(s)://<YOUR_MESSENGER_HOST>:<YOUR_MESSENGER_PORT>/api/statistics/messages/<PARTNER_ID>)

Be sure to replace <PARTNER_ID> with the partner id of need partner.

20 Cluster Mode


In order to run the X/P in Cluster Mode a separate license is required. Please get in touch with PONTON service desk in case you would like to inquire license options.

This is an active/active cluster of application instances. PONTON X/P Messenger instances in cluster mode improve availability, however it is not designed for high availability but for load distribution. Because of that there are some limitations:

- if one Messenger node fails, the other Messenger node does NOT take over the workload of the failed one. Queued messages will wait for the failed node to recover.
- the PONTON X/P Listener cannot be clustered, but it can act as a load balancer to distribute incoming transmissions to the connected Messengers
- The Messenger nodes need a shared filesystem for configuration and message data
- Both Messenger have to be added to the PONTON X/P Listener authorization.txt
- The environment variable CLUSTER_HOME have to be set with the shared network folder
- Extra config have to be added to the wrapper config additional java properties, - DCLUSTER_HOME=[PATH TO THE SHARED FOLDER]
- HotFolder adapter needs to be configured so its folders have CLUSTER_HOME as parent, example \$CLUSTER_HOME/hotfolder-1/...

20.1 System overview

this is what a cluster setup will look like:

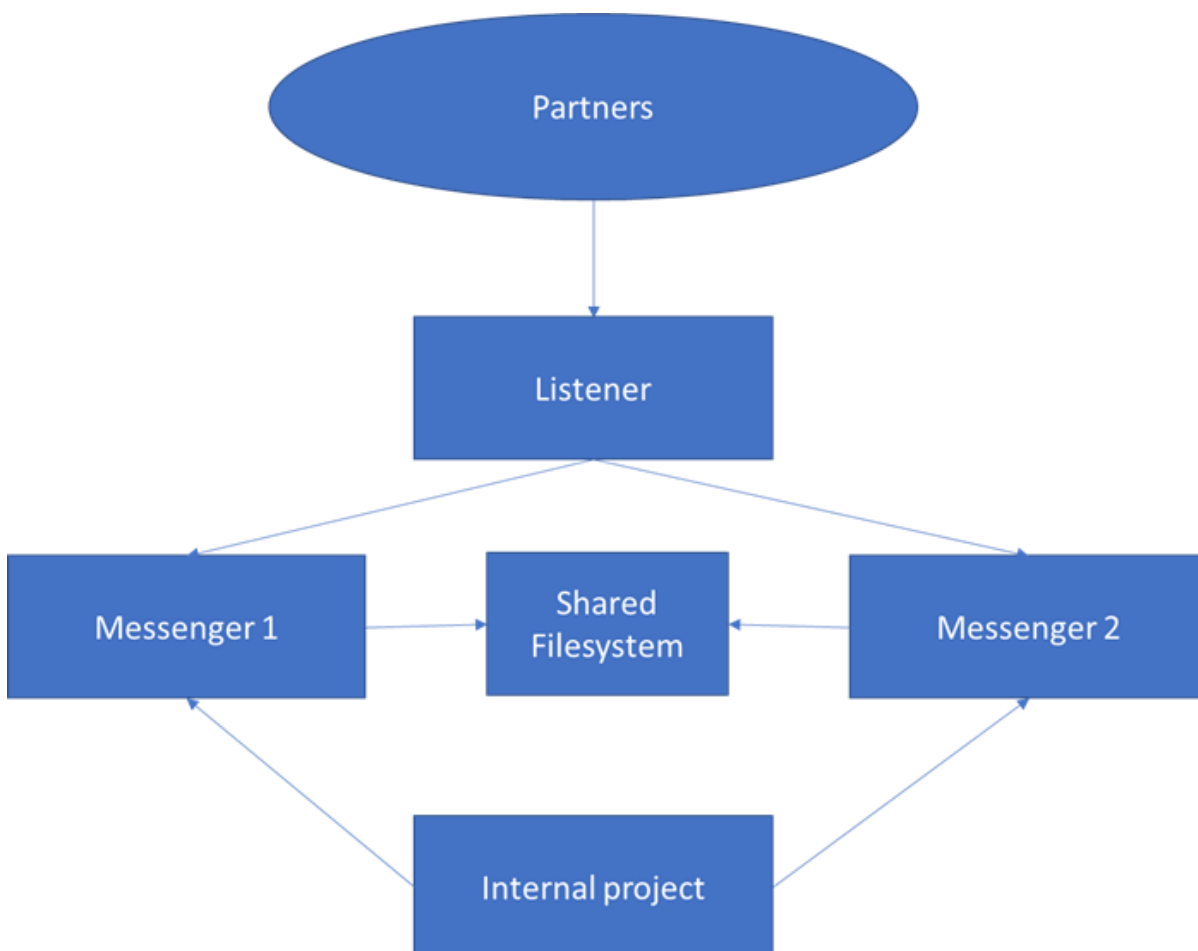

20.2 Configuration

Required properties on ponton-messenger-custom.properties for each messenger

```
#####  
# MessengerCluster options  
#####  
ponton.messenger.cluster=true  
  
# Unique MachineId must be between 1 and 255  
ponton.messenger.cluster.machineid=1 ## unique number per messenger  
  
ponton.messenger.cluster.udp.port=4471  
ponton.messenger.cluster.udp.ip=224.0.0.1  
#####
```

Example messenger.xml for cluster mode

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<Messenger PasswordEncryption="IpIndependent">
  <Folders>
    <WorkFolder>$PONTONXP_HOME/work</WorkFolder>
  </Folders>
  <LogSettings>
    <DetailLog OnlyErrors="false" />
    <MaximumAge deleteFiles="true" enabled="true">365</MaximumAge>
    <CleanupTime>17:00:01</CleanupTime>
    <OkEventAge>2</OkEventAge>
    <EmailNotification />
  </LogSettings>
  <Database>
    <Dialect>PostgreSQL</Dialect>
    <DriverClass>org.postgresql.Driver</DriverClass>
    <URL>jdbc:postgresql://database_host:5432/database</URL>
    <Authentication>
      <Username>username</Username>
      <Password>password</Password>
    </Authentication>
    <ConnectionOptions>
      <MaxConnections>5</MaxConnections>
      <MinConnections>2</MinConnections>
      <ConnectionTimeout>300</ConnectionTimeout>
      <LogSQL>false</LogSQL>
    </ConnectionOptions>
  </Database>
  <CommunicationSettings>
    <Loopback>true</Loopback>
    <PingAll enabled="true" interval="30" />
  </CommunicationSettings>
  <ProxyConfig>
    <ProxyHost></ProxyHost>
    <ProxyPort>3128</ProxyPort>
    <NTDomain></NTDomain>
    <Authentication>
      <Username></Username>
      <Password></Password>
    </Authentication>
  </ProxyConfig>
  <OutboundMailService>
    <FromAddress>partner_1234@partner_1234.de</FromAddress>
    <SMTPServer protocol="smtp">mail.ponton-consulting.de</SMTPServer>
    <Authentication>
      <Username></Username>
      <Password>AP8ALLrFqALrDVKxz5nguQ9iYQmMkX8o25ZU6IWdILPtEDc</Password>
    </Authentication>
  </OutboundMailService>
  <InboundMailService>
    <MailServer protocol="imap">mail.ponton-consulting.de</MailServer>
    <PollInterval>0</PollInterval>
    <Authentication>
      <Username></Username>
      <Password></Password>
    </Authentication>
    <SMIMEPassword></SMIMEPassword>
  </InboundMailService>
  <!-- PontonCA>
    <CertificateRequestEmail>papinet-cert@ponton-consulting.de</CertificateRequestEmail>
```

```

</PontonCA-->
<MessageIdDomain>ponton.xp</MessageIdDomain>
<SSLCertificateCheck>false</SSLCertificateCheck>
<DefaultAdapterId>TestAdapter</DefaultAdapterId>
<DefaultRetransmissionHandling>
  <RetryInterval>60</RetryInterval>
  <Retries>2</Retries>
</DefaultRetransmissionHandling>
<MessageQueues>
  <Inbound>
    <ScanTime>5000</ScanTime>
    <RetryDelay>10000</RetryDelay>
  </Inbound>
  <Outbound>
    <ScanTime>5000</ScanTime>
  </Outbound>
</MessageQueues>
<Archiving Payload="INCLUDED" ebXML="INCLUDED" Signature="INCLUDED"
Certificate="INCLUDED" BackendEnvelope="INCLUDED" Attachments="INCLUDED"
  Folder="$CLUSTER_HOME/archive"
FailedFolder="$CLUSTER_HOME/archive_failed" Compression="true">

</Archiving>
<XpListener host="listener" port="8888" ssl="true" dataConnectionCount="1"/>
<NtpServers SynchronizeIntervalHours="24" enabled="true">
  <NtpServer>
    <Hostname>ntpserver</Hostname>
    <Port>123</Port>
  </NtpServer>
</NtpServers>
</Messenger>

```

21 Appendix

21.1 AS4-BDEW at a glance

This document contains the specific requirements from the [AS4-BDEW specification](#). It presumes, that you are familiar with the basic setup of the PONTON X/P Messenger.

21.1.1 Partner Setup

To identify the partner properly a PartyID must be set. There are three new **Party-ID-Types** available which must be used according to the AS4-BDEW profile specification:

- urn:oasis:names:tc:ebcore:partyid-type:iso6523:0088
- urn:oasis:names:tc:ebcore:partyid-type:unregistered:BDEW
- urn:oasis:names:tc:ebcore:partyid-type:unregistered:DVGW

21.1.2 Partner Certificates

The KeyPair of the partner certificate must be of type EC **brainpoolP256r1**. You either install a certificate of this type which you have received from a trusted Certificate Authority (CA) or you create a certificate request of this type in the PONTON X/P Messenger (see Partner → Certificates + Request Certificates).

21.1.3 Schema Set for Path Switch

There is a new schema set "AS4-BDEW-PathSwitch" which must be activated for partners and agreements. This enables message of PathSwitch type, which is used for switching the communication to the AS4-BDEW

profile. The back-end of the user should be able to process the two message types "Request Switch" and "Confirm Switch".

21.1.4 Agreements

Agreements must be created with the new template AS4-BDEW. This will initialize nearly all fields with the required values for the AS4-BDEW-profile:

- **Packager => Service:** <http://docs.oasis-open.org/ebxml-msg/as4/200902/service>
- **Packager => Action:** <http://docs.oasis-open.org/ebxml-msg/as4/200902/action>
- **Packager => Agreement reference:** <https://www.bdew.de/as4/communication/agreement> (type and pmode must be empty)
- **Packager => Content Properties:** BDEWDocumentType = %MESSAGEID% and BDEWDocumentNo = %MESSAGEID%
- **Packager => Sign messages:** SHA256 / ECDSA / ISSUER_AND_SERIAL_NUMBER
- **Packager => Expect signed messages:** SHA256 / ECDSA
- **Packager => Encrypt messages:** AES128_GCM / ECDH-ES-ConcatKDF-empty-sha256 / ISSUER_AND_SERIAL_NUMBER
- **Packager => Expect encrypt messages:** AES128_GCM
- **Packager => Send receipts => Send signed receipts:** SHA256 / ECDSA / ISSUER_AND_SERIAL_NUMBER
- **Packager => Expect receipts => Expect signed receipts:** SHA256 / ECDSA

21.1.5 Settings

- **Communication => SSL Server Certificate check:** Should be enabled, to ensure SSL Server Certificates are checked regularly if not revoked by CA
- **Communication => Partner certificate revocation check:** Should be enabled, to ensure partner certificates and SSL Client Certificates are checked regularly if not revoked by CA

21.2 Database structure

The Messenger uses a database to store meta information about all sent and received messages. It is possible to query these tables by external applications., but this is no official interface to the application and there might be changes when the Messenger is upgraded.

Therefore any direct database access is not recommended and on your own risk.

Tables used to track the message exchange:

- CONVERSATION
- MESSAGE
- MESSAGE_LOG

21.2.1 CONVERSATION table

contains the following columns:

- ID
- CONVERSATION_ID
- SEQUENCE_OUT_BLOCKED
- SEQUENCE_OUT_OFFSET

- SEQUENCE_OFFSET

Each message belongs to a conversation. Acknowledgement messages always have the same conversation id, as the referenced message.

Business messages can be assigned a specific conversation id, by setting it using the adapter-API or an XML mapping that fetches the conversation ID from the content.

21.2.2 MESSAGE table

stores all incoming and outgoing messages and contains the following columns:

- ID
- MESSAGE_ID
- FOLDER
- CREATION_TIME
- INBOUND
- CONVERSATION
- SEQUENCE_NUMBER
- MESSAGE_TYPE
- SCHEMA_VERSION
- SCHEMA_SET
- PROTOCOL
- RECEIVER_ID
- SENDER_ID
- MESSAGE_TIME
- REFERENCE_ID
- TTL
- PACKAGING_ID
- SIGNED_ACK_REQUESTED
- LOGININFO
- TESTFLAG
- STATUS
- ACK_RECEIVED
- ADAPTER_ID
- MESSENGER_ID

21.2.2.1 constant values used for specific columns

21.2.2.1.1 INBOUND column:

DIRECTION_OUTBOUND = 0

DIRECTION_INBOUND = 1

21.2.2.1.2 STATUS column:

MSTATUS_IN_PROCESS = 1

message is currently being processed. (signing, encryption, validation, etc.)

MSTATUS_IN_TRANSIT = 2

message is queued for delivery, or is waiting for an acknowledgement

MSTATUS_OK = 3

message was successfully delivered (this is a final state)

ERROR MSTATUS_FAILED = 4

all message delivery attempts failed. (this is a final state)

MSTATUS_ARCHIVED = 5

the message was archived without any processing or delivery

MSTATUS_TEMPORARY_FAILED = 6

message was manually marked using the message monitor

21.2.3 MESSAGE_LOG table

has the following columns:

- ID
- TIMESTAMP
- MESSAGE_ID
- TEXT_ID
- ADDITIONAL_TEXT

The MESSAGE_LOG table stores all details about the processing and delivery of inbound and outbound messages. The MESSAGE.ID column is referenced with the MESSAGE_LOG.MESSAGE_ID column.

21.3 Troubleshooting

21.3.1 Outbound queue fills up

Messages are stored in the outbound queue and removed when they are successfully delivered or if all transmission attempts have failed.

In normal operation this queue should not fill up, assuming that all destination servers are reachable and not overloaded.

if the queue fills up, this has several implications:

1. the needed memory increases with each queued message
2. the Messenger creates a folder in the filesystem for each message that is about to be transmitted. There might be file system limits on the number of folder that can be created within the work/outbound/ folder
3. startup time of the Messenger will increase with the queue size
4. delivery of messages to same unreachable destination will increase the time until a final result is available for the queued messages.
5. delivery of messages to other destinations are not delayed, but if the overall queue gets too large it will prevent any message processing.

fix **before** Outbound Queue is full:

- prevent new messages to be queued by enabling maintenance mode (reject outbound messages)
- increase max memory in wrapper.conf to allow more messages to be queued
- change filesystem if there is a subdirectory limit (for ex. EXT4 has a limit of 64000 subfolders)
- if one destination is unavailable: in GUI select all outbound messages that are in status "IN TRANSIT" and have an unavailable destination. Then click "delete from queue". This will move all messages to failed archive and set the status to failed.

fix when Outbound Queue is full:

- increase max memory in wrapper.conf to allow Messenger startup to be successful
- DELETE FROM OUTBOUND_QUEUE directly in the DB
 - start Messenger
 - in GUI select all outbound messages that are in status "IN TRANSIT" and click "delete from queue". This will move all messages to failed archive and set the status to failed.
 - resend the failed messages in chunks

21.3.2 Inbound queue fills up

Messages from communication partners are stored in the inbound queue and removed when they are successfully delivered to the configured adapter.

In normal operation this queue should not fill up, assuming that all adapters are running and connected backends accept messages.

if the queue fills up, this has several implications:

1. the needed memory increases with each queued message
2. the Messenger creates a folder in the filesystem for each message that is about to be transmitted. There might be file system limits on the number of folder that can be created within the work/inbound/ folder
3. startup time of the Messenger will increase with the queue size
4. there is no timeout for delivery to adapters, therefore it is important that adapters (and connected backends) are always available

fix **before** the Inbound Queue is full:

- prevent new messages to be queued by enabling maintenance mode (reject inbound messages). However this will cause errors at the senders.
- increase max memory in wrapper.conf to allow more messages to be queued
- change filesystem if there is a subdirectory limit (for ex. EXT4 has a limit of 64000 subfolders)
- if an adapter (or it connected backend) is unavailable, messages should be "deleted from the inbound queue" using the GUI

fix when Inbound Queue is full:



- increase max memory in wrapper.conf to allow Messenger startup to be successful
- DELETE FROM INBOUND_QUEUE directly in the DB
 - start Messenger
 - in GUI select all inbound messages that are in status "IN TRANSIT" and click "delete from queue". This will move all messages to failed archive and set the status to failed.
 - resend the failed messages in chunks after the adapter (and connected backend) are working



PONTON GmbH
Dorotheenstraße 64
22301 Hamburg
Germany

Web: <http://www.ponton.de>

LinkedIn <https://www.linkedin.com/company/ponton-consulting/>

